621.384

FEBRUARY 1958

TWO SHILLINGS

Wireless World

ELECTRONICS

Radio · Television

THE JOHN CRERAR LIBRARY
FEB 20 1958

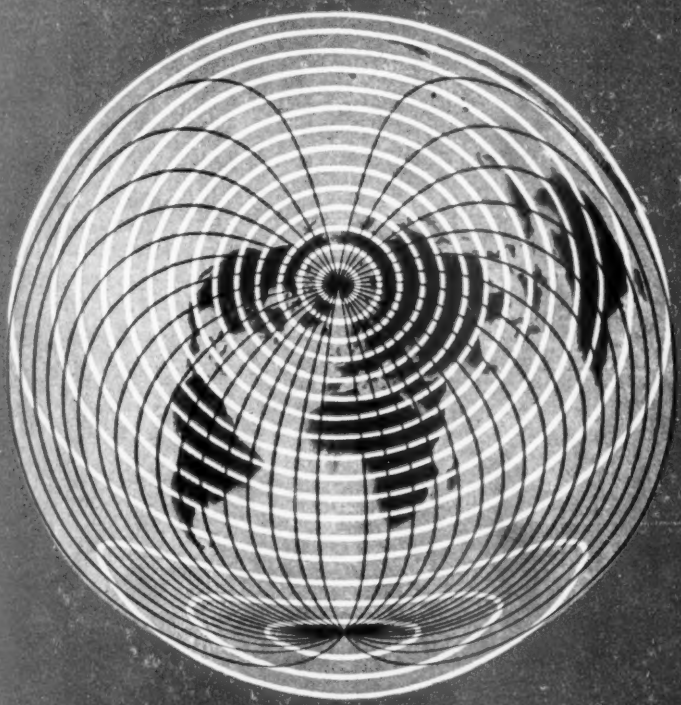

FORTY-SEVENTH YEAR OF PUBLICATION

XUM

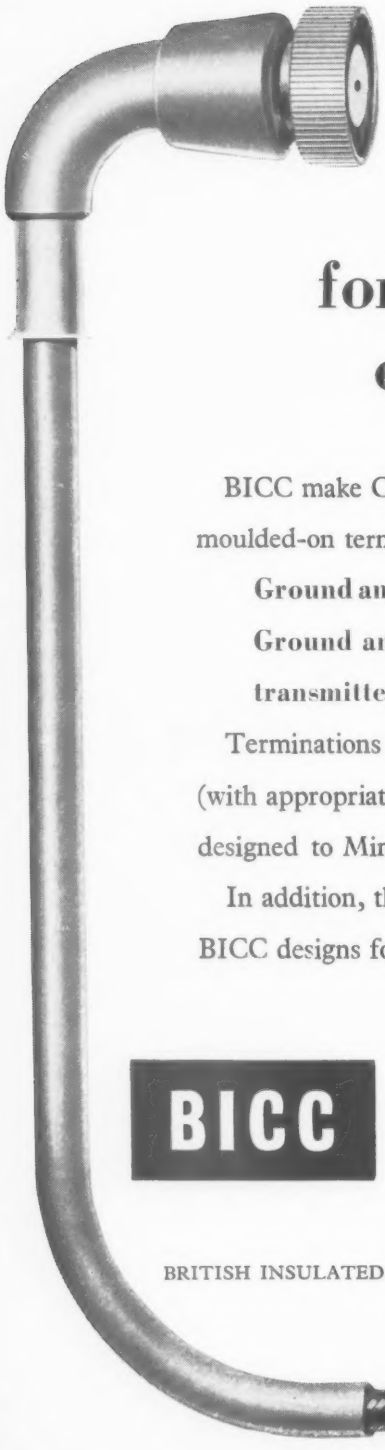

for *interconnecting* electronic equipment

BICC make Coaxial Radio Frequency Connectors with moulded-on terminations for use with—

Ground and airborne radar equipment

Ground and airborne radio transmitters and receivers

Terminations include a standard range (with appropriate panel mounting units) designed to Ministry of Supply requirements.

In addition, there are a number of BICC designs for other applications.

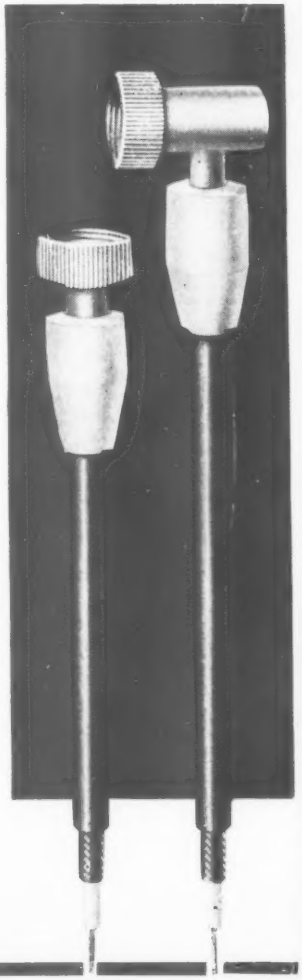

BICC *coaxial* **R. F. CONNECTORS**

BRITISH INSULATED CALLENDER'S CABLES LIMITED,
21 Bloomsbury Street, London, W.C.1

NOW AVAILABLE
10th Edition of
AVO
Valve Data Manual
25/- post free.

An *Entirely* NEW Standard in BRIDGE Presentation

THIS new "Avo" Instrument is a self-contained mains driven model incorporating 24 calibrated ranges.

One sweep of the main calibrated dial covers four decades and assures a very rapid search for balance. This, combined with an automatic scale expansion device, enables the two lower accuracy decades of the main scale to be read at full scale accuracy.

Leakage currents can be measured down to 0.01 μA at 450V, thus representing an ability to read up to 45,000 MΩ. Balance indication is clearly shown by a panel meter operating in conjunction with a valve voltmeter circuit.

For production checking, the Bridge has been fitted with a ± 10% comparison scale for use with external standards.

Resistance measurements employ D.C. When measuring inductance and capacity, the Bridge network is fed from an internal 1,000 c/s oscillator. Internal capacity strays have been eliminated electronically.

The instruction manual provided shows how components can be tested in situ.

Dimensions: 15½ x 10½ x 10 ins. approx. (with lid closed)

Weight: 16 lbs. approx.

Power Supply: 100-110V. and 200-250V. A.C. 40-65 c/s.

The AVO **Universal MEASURING BRIDGE Type 1** *List Price* **£75**

RESISTANCE: 6 calibrated ranges covering 0.1Ω to 1,000 MΩ. (Accuracy ±1% at midscale).

CAPACITY: 6 calibrated ranges covering 1$\mu\mu$F to 1,000μF. (Accuracy ±1% at midscale).

INDUCTANCE: 6 calibrated ranges covering 1 mH to 1,000 H. (Accuracy ±2% at midscale).

Fully descriptive pamphlet available on application.

AVO Ltd.

VICtoria 3404 (9 lines)

AVOCET HOUSE · 92-96 VAUXHALL BRIDGE ROAD · LONDON · S.W.1

M.B.1

A

improved

SOLARTRON

'packaged' power

sub-units

It's so easy to put in a ready-made, self-contained, completely reliable Power Supply sub-unit!

these are design centre performance figures

	SRS 156	AS 516	AS 517	AS 616	AS 619	AS 754	AS 755
VOLTAGE	±150V	±250V or ±300V	±250V or ±300V	±250V or ±300V	±150V to ±180V	±250V or ±300V	±250V or ±300V
CURRENT	0-40mA	0-50mA	10-100mA	0-1A	0-200mA	0-200mA	0-500mA
A.C. OUTPUTS	6.3V 4A C.T 6.3V 1A	6.3V 4A C.T. 6.3V 1A	6.3V 4A C.T. 6.3V 2A C.T. 6.3V 1A	6.3V 10A C.T.	6.3V 4A C.T. 6.3V 4A C.T. 6.3V 1A C.T.	6.3V 6A C.T. 6.3V 6A C.T. 6·3V 2A	6.3V 10A C.T. 6.3V 5A C.T.
D.C SOURCE IMPEDANCE	<2Ω	0·3Ω	0·2Ω	0·4Ω	0·5Ω	0·4Ω	0·05Ω
STABILISATION FACTOR	400:1	1000:1	800:1	500:1	400:1	500:1	500:1
A.C. SOURCE IMPEDANCE 40c/s—100kc/s	<2Ω	0·1Ω	0·15Ω	0·2Ω	0·2Ω	0·4Ω	0·2Ω
RIPPLE AND NOISE CONTENT	<350μV	100μV	150μV	300μV	100μV	150μV	300μV
DIMENSIONS	9¼" × 6⅛" × 6¼" high	9¼" × 6⅛" × 6¼" high	9¼" × 7¼" × 6¼" high	19" × 19" × 10½" high	10" × 10" × 6⅞" high	13" × 6⅛" × 6¼" high	19" × 12" × 8¾" high
WEIGHT	14¼ lbs	14½ lbs	20½ lbs	150 lbs	21¼ lbs	25 lbs	56 lbs

* Better stability factors
* More heater power
* Less ripple and noise
* No increase in cost for this improved performance
* Lower source impedance
* Stability unaffected by capacity loading
* Delivery ex-stock

SOLARTRON **Power Supply Sub-units**

THE SOLARTRON ELECTRONIC GROUP LTD • THAMES DITTON • SURREY • ENGLAND

Telephone: EMBerbrook 5522 • Cables: Solartron, Thames Ditton

TRANSISTOR OC16

Dissipation

14 watts at 45°C*

INDUSTRIAL APPLICATIONS

This high output germanium junction P.N.P. power transistor is being used to great advantage in the following applications:

Class A and B audio Amplification

Aircraft Passenger Address Systems

C.D. Convertors

Power Amplifiers for Servo Motors

Power for Relay Operation.

FEATURES

Peak current 3 amps.

Maximum mean current 1.5 amps with good current linearity.

Maximum continuous junction temperature 75°C. Up to 90°C for intermittent operation (total duration 200 hours max.)

A pair of OC16's operating in Class B push-pull will provide an output in excess of 10 watts into loudspeakers with 12 volts "H.T."

Half actual size

DATA

Characteristics (measured at 25°C ambient)

Collector reverse leakage current, grounded base ..... <100μA

Current amplification

at Ic = 30mA 40

at Ic = 300mA 35

at Ic = 2A.....22

at Ic = 3A.....16

AMBIENT TEMP. (TO GIVE 75°C JUNCTION TEMP.)	DISSIPATION WITH INFINITE HEAT SINK, e.g. WATER COOLED	DISSIPATION WITH LARGE METAL PLATE 1°C PER W THERMAL RESISTANCE	DISSIPATION WITH 1 sq. ft. METAL PLATE 2°C PER W THERMAL RESISTANCE	DISSIPATION WITH SMALL METAL PLATE (4 in. x 7 in.) 5.5°C PER W THERMAL RESISTANCE
25°C	45W†	24W	16W	7.6W
35°C	36W†	19W	13W	6.1W
45°C	27W†	14W	9.7W	4.6W
55°C	18W	9.5W	6.5W	3.0W

† *Continuous dissipation values in excess of 24W are at present prohibited by the voltage and current ratings given in the full data.*

*** POWER DISSIPATION**

14 watts dissipation at an ambient temperature of 45°C can be allowed when the OC16 is bolted to a large but practical heat sink. The accompanying table shows allowable dissipations with different heat sinks. In all cases the transistor is mounted directly on to a plate with a thin tin-plated lead washer.
When electrical insulating mica washers are used, the dissipation is somewhat reduced. Full data is available.

MULLARD LIMITED
MULLARD HOUSE
TORRINGTON PLACE
LONDON W.C.1

Mullard

COMMUNICATIONS AND INDUSTRIAL VALVE DEPARTMENT

MVT 329a

NEW... COMPACT...

series 320 relay

This relay is of compact design and extremely small for the duty it performs, the contact arrangement is three pole double throw and connections to contact and coil are conveniently brought out at one end of the relay. Contacts and terminations are housed in a high grade Bakelite moulding and the design of the moulding gives increased creepage path and excellent insulation. Guards are fitted to avoid flashover between contacts.

Maximum Working Voltage: 440 volts A.C. 50 cycles.
V.A. Rating: 5 V.A.
Contacts rated up to 10 amperes at 250 volts A.C. or 30 volts D.C.

Series 325 Relay. The only difference is that this is a D.C. Relay and the maximum working voltage is 250 volts D.C.
Wattage: 2 watts.
Contacts rated up to 10 amperes at 250 volts A.C. or 30 volts D.C.

MAGNETIC DEVICES LIMITED

Magnetic Devices LTD.
A.I.D. AND A.R.B. APPROVED

MAGNETIC DEVICES LTD., EXNING ROAD, NEWMARKET, SUFFOLK
Telephone: Newmarket 3181/2/3 Grams: Magnetic Newmarket

TRANSMITTING TETRODES

Type C.1112 has a maximum anode dissipation of 250W and is suitable for use as a power amplifier in transmitters up to 400W, as an oscillator, or in R.F. heating equipment (up to 1 kW per valve). *Type C.1108* is a smaller version designed for similar uses at lower power levels (anode dissipation 125W).

E.E.V. type	C.V. number	American equivalent	Max. operating frequency (Mc/s)
C.1108	2130	4-125A	200
C.1112	2131	4-250A	120

Full data relating to these valves will be sent on request

'ENGLISH ELECTRIC'

ENGLISH ELECTRIC VALVE CO. LTD.

Chelmsford, England.
Telephone: Chelmsford 3491

AP300/48

AIRMEC

VALVE VOLTMETERS

Valve Voltmeter Type 217

THE Valve Voltmeter Type 217 is an improved version of the well known Airmec Valve Voltmeter Type 712. The stability has been greatly increased by the substitution of modern valves and by mechanical improvements in the probe design and mounting. The frequency range has been extended down to 20 c/s and all the desirable features of its predecessor have been retained.

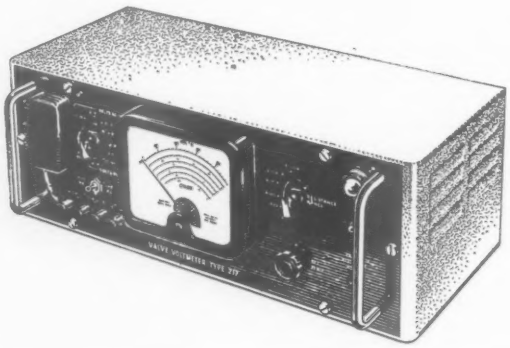

- Frequency range from 20 c/s to 200 Mc/s
- Balanced, unbalanced and differential inputs
- Measures both positive and negative D.C. voltages
- Six resistance ranges reading up to 100 megohms
- Balanced circuitry ensures exceptional stability
- Immediate delivery

Millivoltmeter Type 784

(Wide-band Amplifier and Oscilloscope Pre-Amplifier)

- Frequency range from 30 c/s to 10 Mc/s
- Voltage ranges 0-10, 0-100, 0-1000 millivolts
- Can be used as an amplifier up to 15 Mc/s
- Excellent stability
- Immediate delivery

Full details of these or any other Airmec instruments will gladly be forwarded upon request.

AIRMEC LIMITED HIGH WYCOMBE, BUCKINGHAMSHIRE, ENGLAND

Telephone : High Wycombe 2060 *Cables :* Airmec, High Wycombe

A 130-mile Westinghouse "proving ground" has been set up between Hamilton and Kinmount, Ontario. Here Westinghouse engineers obtain actual operating results to assist you in planning your communication system.

57-B-745R

ANOTHER WESTINGHOUSE FIRST!

SHF "Scatter" Transmission



New Westinghouse 4400-5000 mc. Transmitting and Receiving Equipment is compactly and durably designed for truck mounting or fixed installation for either commercial or military application.

● Now for the first time in the communications field, scatter equipment for super-high frequency transmission for fixed or transportable operation has been introduced by Canadian Westinghouse.

The new Westinghouse "Scatter" communications equipment is designed for high quality, high reliability transmission of voice, teletype, telemetering, facsimile, television and data signals over hops of 100 to 200 miles. Voice capacity for multi-channel operation extends to 120-150 channels.

Contact your local Westinghouse Sales Office for Descriptive Bulletin H83-100 or write Canadian Westinghouse Company Limited, Electronics Division, Hamilton, Canada.

WATCH WESTINGHOUSE ELECTRONICS

...WHERE BIG THINGS HAPPEN FIRST

The latest in the Hi-Fi range

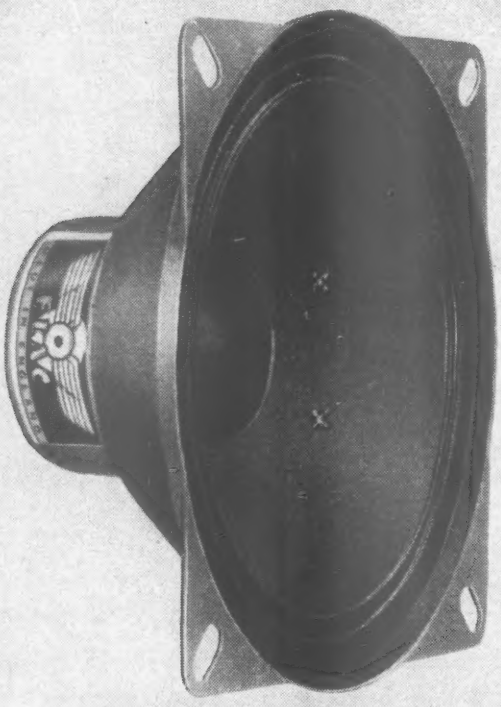

The Elac 4 inch Tweeter

A further addition to the "Elmag" High Fidelity range, this 4in. cone type Tweeter is the finest of its class yet produced. Response to transients is exceptionally good and the absence of undesirable peaks results in clear and smooth reproduction.

For best results it should be used with a suitable cross-over filter in conjunction with 1 or 2 larger units.

Frequency response within 5 dB from 5,000-17,000 cps, only 7½ dB down at 20,000 cps.

OVERALL SIZE: 4in. DIA. x 2⅝in. DEEP.

POWER HANDLING: 2 W. Peak A.D. INPUT.

VOICE-COIL IMPEDANCE: 6 ohms at 5,000 cps.

PRICE: 29/10 inc. P.T.
Trade Terms 33⅓%.

ELAC

ELECTRO ACOUSTIC INDUSTRIES LTD
STAMFORD WORKS BROAD LANE TOTTENHAM LONDON N.15 TEL.: TOTtenham 0505-9

Little fellows making

POWERFUL HISTORY

Top manufacturers and designers have been quick to grasp the advantages offered by the recent introduction of the Ever Ready Power Pack range of batteries for transistor duties and are exploiting the enormous potential they offer in the design of portable *transistor* equipment. **Have you considered how Ever Ready Power Packs might help develop new lines in your business?**

Write or telephone today for comprehensive leaflet which gives full details to: Sales Department (Technical Service) The Ever Ready Company (G.B.) Ltd., London, N.7. Tel: Archway 3030.

EVER READY
REGD TRADE MARK

POWER PACKS *EXTRA* ***for life!***

* **The illustrations show only three of the new range of Ever Ready Power Packs.**

Four stage amplifier weighing under ¾ ounce

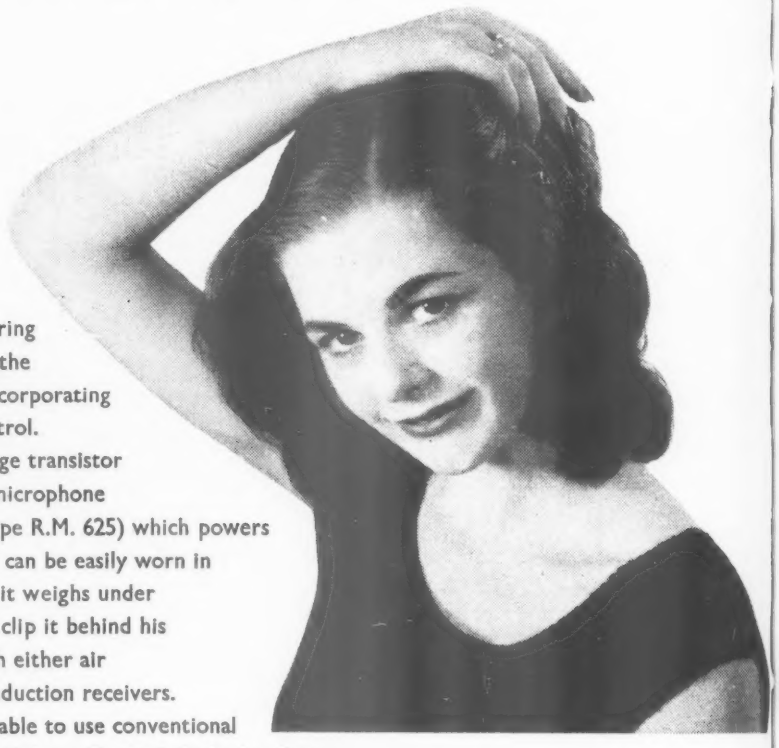

The new Multitone Hearing Aid is considered to be the smallest in the world incorporating Automatic Volume Control.
The Orette is a four stage transistor amplifier with built-in microphone and battery (Mallory Type R.M. 625) which powers it for over 100 hours. It can be easily worn in the hair by a woman as it weighs under ¾ ounce, and a man can clip it behind his ear. It can be fitted with either air conduction or bone conduction receivers.
Very many deaf people able to use conventional aids without Automatic Volume Control, find a headborne instrument with linear amplification totally unacceptable.
The reasons for this are:—

* Aids specifically designed to be headborne have a smaller maximum power output than a substantial body aid. Distortion therefore sets in much earlier.
* Owing to the position of the aid the users' own voice sounds much louder through the aid than through an instrument worn on the person.
* The effect of high pitched background noises, such as clapping in a theatre, is greatly exaggerated when the aid is worn on the head. These noises can easily become intolerable without Automatic Volume Control, as incorporated in the Orette hearing aid.

The ORETTE is the aid which has been designed to be headborne.

multitone ORETTE

Multitone Electric Co. Ltd. 12/20 Underwood Street, N.1. Telephone: CLErkenwell 8022
(Branches: London, Birmingham, Dublin, Edinburgh, Glasgow, Brighton, Cardiff, Torquay and Agents throughout Great Britain and the World.)

The finest seat in the house . . .

From perhaps just one seat in the concert hall will the sound intensity and tonal relationship of the different instruments suit perfectly your own hearing characteristics. With the new Pye Mozart this one seat is reserved for you indefinitely—in the comfort of your own home. There you can create the music of your choice, free from distortion or audience distraction, and exactly adjusted to your own individual needs . . .



The Pye Mozart is available in a metal openwork case or chassis form, illustrated above — weighs 8¼ lbs, measures 3¾″ x 10½″ x 5″ and gives 10 watts output.



Dialomatic Selector
The Mozart has input facilities for records, tape, and radio. New 'dialomatic' pickup compensation unit gives instant matching for most types of pickup.

On/off Push Button
This is completely separate from the volume control and eliminates all mains interference.

Simplified Circuitry
This brilliantly simplified printed circuit uses only 3 valves, a metal rectifier and a minimum of capacitors and resistors, allowing a great saving of space.

PYE

Mozart

Pye Limited, Auckland, C.1., New Zealand.

Pye Pty. Ltd. Melbourne, Australia.

Pye Corporation of America, 1149 Raritan Avenue, Highland Park, New Jersey, U.S.A.

Pye Radio and Television (Pty.) Ltd. Johannesburg, South Africa.

Pye (Ireland) Ltd., Dublin, Eire.

Pye Limited, Tucuman 829, Buenes Aires. Argentine.

Pye Ltd. Mexico City.

Pye (Canada) Ltd. Northline Road, Toronto

Deutsche Pye G.m.b.H. Berlin-Zehlendorf-West, Reonstrasse 2, Germany.

PYE LIMITED · CAMBRIDGE · ENGLAND

Reliability

"Why GARRARD *is best" series No 11*

IN order to maintain the well known Garrard standard for reliability, a daily sampling check is made in our laboratory on production units. The illustration shows a Tropical test cabinet in which Garrard units are tested for reliability under various Tropical conditions. A vibrating machine tests the packing and electrical test equipment subjects the motors to a high voltage test to ensure that they maintain the high electrical safety factor insisted upon. Microscopic examinations are also made of various components. One more reason why Garrard units are the finest in the world.

Garrard AUDIO PERFECTION

THE GARRARD ENGINEERING AND MANUFACTURING CO. LTD SWINDON · WILTS

QUALITY *backed by experience*

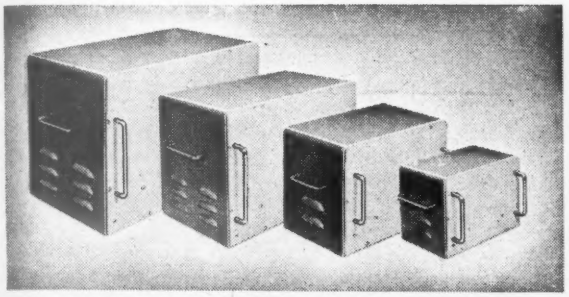

INSTRUMENT CASES

Attractively constructed of seam welded steel, these strong instrument cases are well ventilated and stove enamel finished in various colours. Available in four standard sizes or to your own specification.

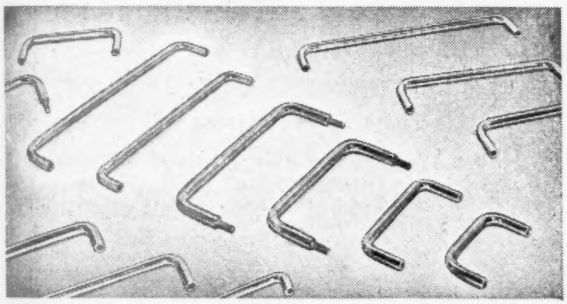

HANDLES

Made in standard range (4in., 6in., 8in. and 10in. centres). A wide variety of other sizes can be made to special order.

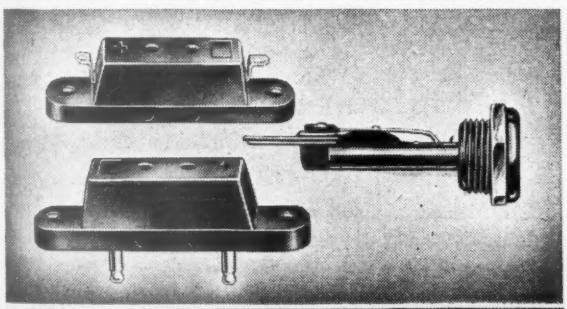

AMP-CHECKS

Invaluable device designed to facilitate current measurements. Installed in series with an electrical (or electronic) circuit to all points where measurements or checks are required without open circuiting.

Other products include
PULSE GENERATORS
CAPACITY COMPARATORS
TAPE RECORDERS
STABILISED POWER SUPPLIES
PHOTOCELL AMPLIFIERS

Metal components available to customer's specification and small or batch quantities undertaken.

Experienced in research projects and prototype construction. SUB-CONTRACTORS for sheet metal or assembly and wiring. AID and ARB approved.

PHILLIPS & BONSON LTD

Reg. Offices: IMPERIAL HOUSE DOMINION ST. MOORGATE LONDON EC2 *Telephone:* MONARCH 5481-5
Works: POND WORKS 8 MILLFIELDS ROAD HACKNEY LONDON E5 *Telephone:* AMHERST 4331





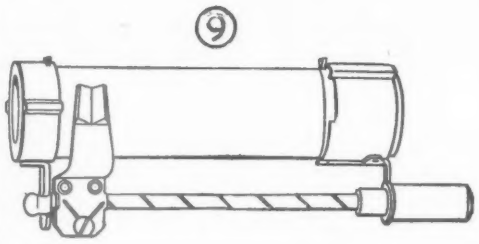

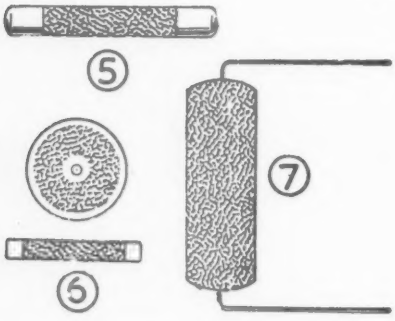



A SERVICE FOR DESIGNERS

The possibility of a component change — due to shortage of supplies, increased costs or failure to meet specific conditions — is a problem facing every designer of electronic equipment. However, one basic component can be 'tailor-made' from the start, for LAB will supply the precise type of Resistor required, ex stock *and* at the right price. Write for full technical data, prototype samples and price schedules to:—

THE RADIO RESISTOR CO. LTD.,
50 ABBEY GARDENS, LONDON, N.W.8.
Telephone: Maida Vale 0888

CARBON	WATTS	OHMIC RANGE	TOLERANCES ±
1. Solid	¼ 1 & 2	10—10M	5% & 10%
2. Cracked	1/30—20	1—500M	5% & 10%
3. * High Stability	1/10—3	1—50M	0.5% 1% 2% 5%
4. Variable	¼	5K—2M	—
5. V. High Resistance	¼—3	50M—10^{13}	5% & 10%
6. V.H.F. (Rods & Discs)	1/10—1	10—1K	1% & 2%
WIREWOUND			
4. Rheostats	4—500	10—80K	—
9. Sliders	3—15	10—16K	—
8. Vitreous	3—500	1—150K	1% 2% 5%
7. Cemented	1—15	1—25K	5% & 10%

* The ubiquitous blue (1%) grey (2%) "HISTABS"



Do you KNOW

THAT the whole of the vast range shown under (3) can be delivered ex-stock in all Preferred values.

THAT Cracked Carbon Resistors (2) are more ecomonical in the ± 5% range than Solid Carbon.

25 YEARS LAB RESISTOR
JUBILEE YEAR OF RESISTOR SPECIALISATION

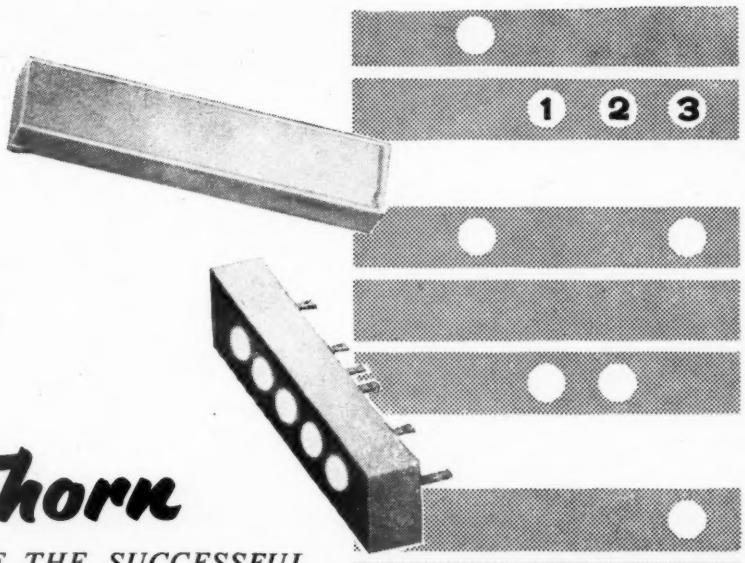

Thorn

ANNOUNCE THE SUCCESSFUL PRODUCTION OF THE

ELECTROLUMINESCENT INDICATOR BLOCK with power pack *(if required)*

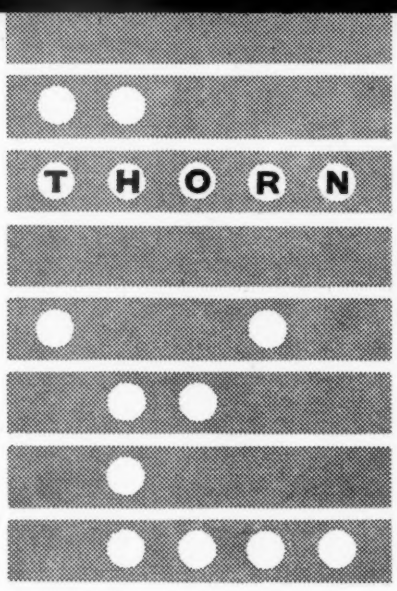

New • Space-saving • Economical

The essential component for MULTI-INDICATOR panels and banks of indicators

For those planning assemblies requiring banks or panels of illuminated indicators, here is the ultimate in simplification, space-saving and economy. The newly developed Thorn Electroluminescent block which has overall dimensions of only $2\frac{3}{16}" \times \frac{1}{2}" \times \frac{5}{16}"$ contains five electroluminescent areas each with its separate contacts. These blocks can be assembled in great numbers and only occupy a fraction of the present space utilised by lamp indicators.

POWER PACK Transistor power packs can be supplied as a complete installation if required.

Full information available now from:
AIRCRAFT COMPONENTS DIVISION · THORN ELECTRICAL INDUSTRIES LIMITED
GREAT CAMBRIDGE ROAD · ENFIELD · MIDDLESEX · TEL: ENFIELD 5340

X-BAND NOISE TUBE

Noise Power excluding image frequency contribution ..... 15·25db

Operating Current..... 35 mA

Overall Length..... 6 21/32"

Base Diameter ..... 0·64"

Discharge Tube Diameter ..... 0·185"

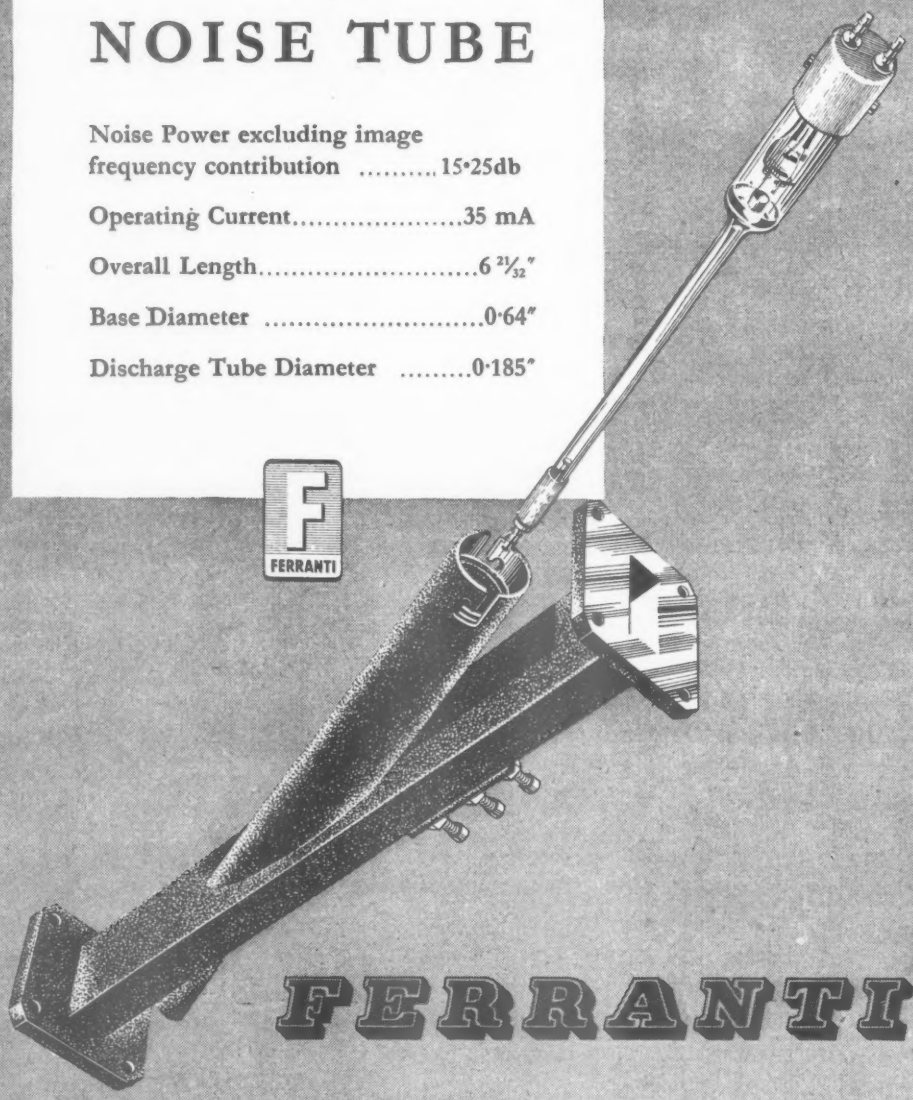

FERRANTI

FERRANTI LTD. · FERRY ROAD · EDINBURGH 5 Tel. Granton 89181

ES/T38

"Is that the best loudspeaker you can make?"

No, of course it isn't. We can go on making bigger and better loudspeakers till the cows come home, the only limit being set by the price you are prepared to pay.

The DU120 Duplex Coaxial is, however, a very good loudspeaker at a reasonable price and we think it meets the requirements of a lot of people who want to enjoy to the full the much improved quality now available from discs, tapes and F.M. broadcasts without bankrupting themselves in the process. You won't do better for your money.



VITAVOX ***DU120 DUPLEX COAXIAL***

Full Range Loudspeaker

£19·10s.

VITAVOX LIMITED • WESTMORELAND ROAD, LONDON, N.W.9, ENGLAND • Telephone: COLindale 8671

New value in valveholders

A *ceramic* valveholder with its many inherent advantages, costing no more than the ordinary moulded varieties—this is the latest news from Plessey at Towcester. This superior product employs high-grade, low-loss ceramic body material and has a pin-to-pin capacity of *less than 0.5 pf.*
Design Engineers, manufacturers and others interested in this cost-cutting, performance-improving development, should request a copy of Plessey Data Sheet No. 6062 which contains comprehensive data.

Parameters

Equivalent Resistance at 20 Mc. between 2 adjacent contacts:
Not less than 3 megohms
Insulation resistance:
Greater than 20 x 10^{12} ohms
Voltage Breakdown:
Greater than 3.5 kV pin-to-pin and pin-to-earth
Contact Resistance:
Less than 4 milliohms
Contact Material:
Spring quality Brass—Silver Plated

Plessey

CHEMICAL & METALLURGICAL DIVISION · COMPONENTS GROUP
THE PLESSEY COMPANY LIMITED · WOOD BURCOTE WAY · TOWCESTER · NORTHANTS · TEL: TOWCESTER 312
Overseas Sales Organisation: PLESSEY INTERNATIONAL LIMITED · ILFORD · ESSEX · ENGLAND · TELEPHONE ILFORD 3040
TCS

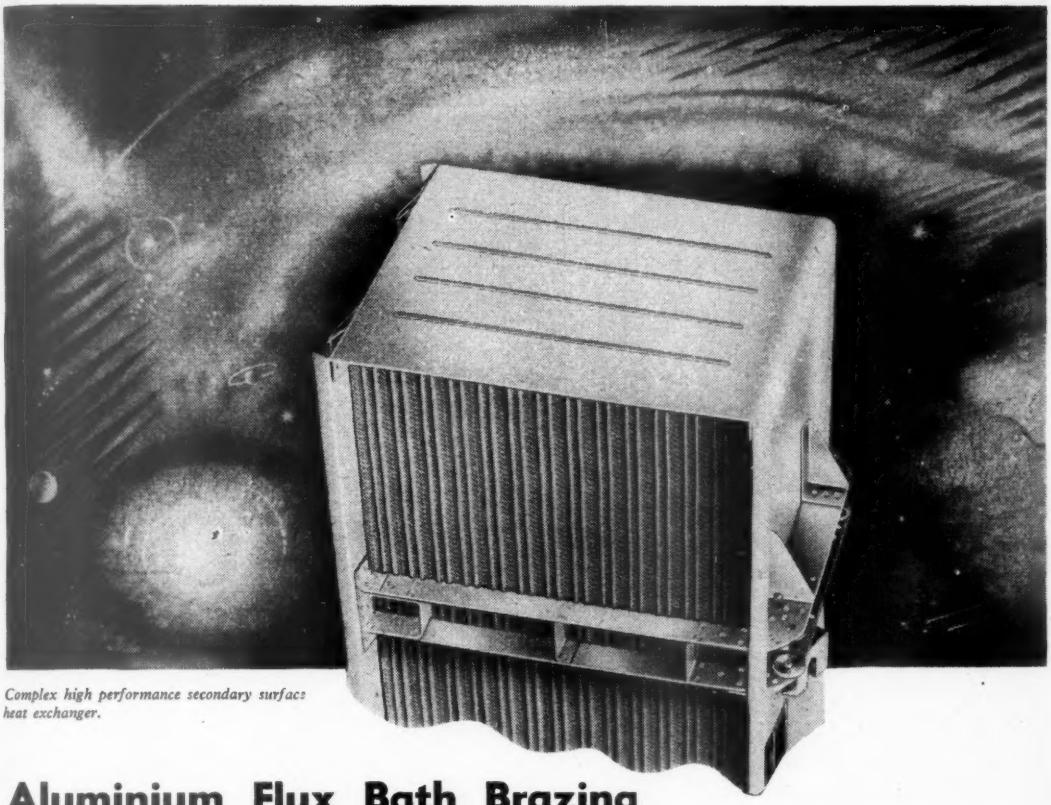

Complex high performance secondary surface heat exchanger.

Aluminium Flux Bath Brazing Makes the Impossible Possible

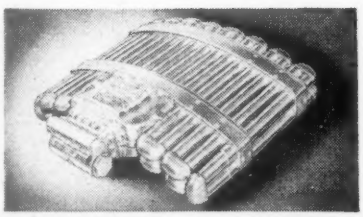



The tremendous advantages of aluminium dip brazing are at last readily available. The finest plant in the country is at your service.

Dip brazing makes the impossible possible. Design inaccessible joints—as many as you wish. Use aluminium as thin as foil. Think in terms of very close tolerances. All these things you can do. And you can combine them in units so small, so light and so efficient that it would be *impossible* to make them by any other method.

Designing for dip brazing need present no problems. We shall be happy to design for you, or if you prefer it, to discuss possibilities with you and then work to your design.

If you would like to know more about what can be done by this process please contact us. We are specialists in all types of brazing and welding.

Above: Fuel cooled oil cooler for high performance gas turbine engines.

Below: Typical example of industrial heat exchanger.



Delaney Gallay LTD

Specialists in heat exchange and heat application for the aircraft, automobile and marine industries.

Vulcan Works, Edgware Road, London, N.W.2. Telephone: GLAdstone 2201.

WESTINGHOUSE

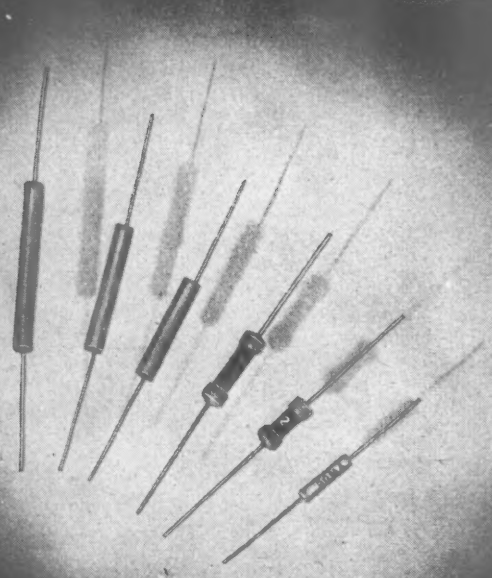

MINIATURE
RECTIFIERS
for
Electronic Circuitry

Write for full details to Dept. W.W.2,
WESTINGHOUSE BRAKE & SIGNAL CO. LTD.
82, York Way King's Cross, London, N.1. *TERminus* 6432

CINCH

BARRIER TERMINAL, FANNING AND MARKER STRIPS

(a) Conductor hooked under cleat and soldered

(c) Cable secured by crimping

(d) Upturned ends hold terminal under screws before tightening

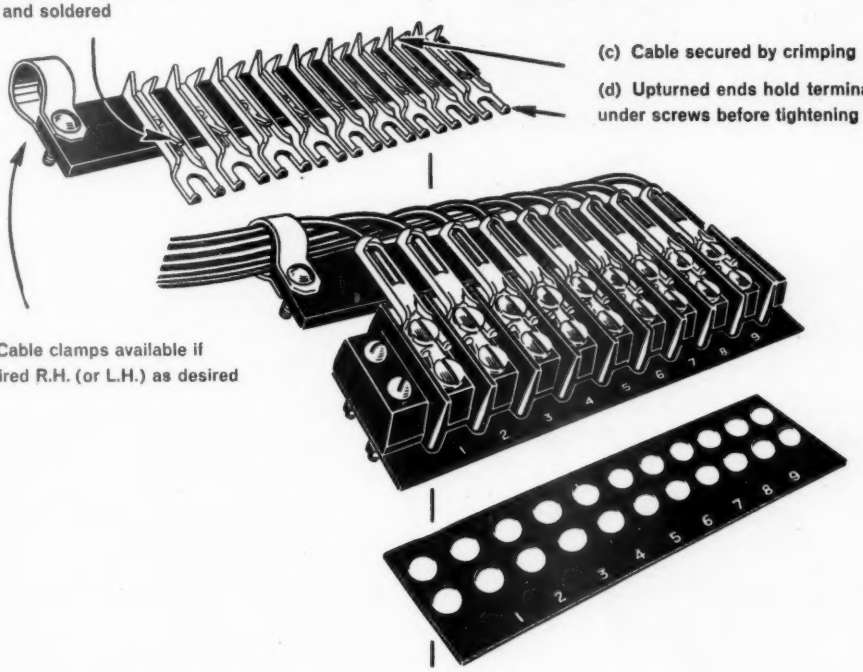

(b) Cable clamps available if required R.H. (or L.H.) as desired

'Standard' series are available with various types of terminals, up to 21 way– 'Miniature' series up to 12 way. Insulating materials phenolic or 'Mikacin' as specified.

CARR FASTENER COMPANY LTD
STAPLEFORD · NOTTINGHAM

REPRESENTATIVE:
THE BENJAMIN ELECTRIC LTD
TOTTENHAM · LONDON N.17

Smee's 115

MARKINGS IN WHITE TO CUSTOMERS' REQUIREMENTS

McMURDO
Multi-Way Voltage Selectors

14 WAY
Type B279001
NYLON LOADED P.F. MOULDING

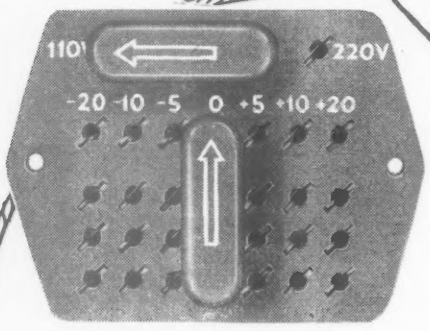

3 Pin Shorting Plugs

6 WAY
Type XVS/6
NYLON LOADED P.F. MOULDING

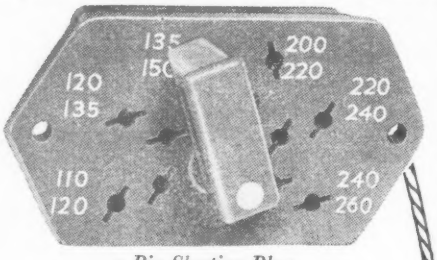

3 Pin Shorting Plug

4 WAY
Type BVS/4
BLACK P.F. MOULDING



3 Pin Shorting Plug

6 WAY MINIATURE
Type BMVS/6
BLACK P.F. MOULDING



Standard B9A (Noval) Valveholder with 2 Pin Captive Shorting Plug

Send for full details to :—

THE McMURDO INSTRUMENT CO. LTD., ASHTEAD, SURREY. Tel: ASHTEAD 3401

MVS15

The fruits of TRUVOX Development.

TRUVOX R2 Recorder



Tape Recording Amplifier



Tape Deck Mark IV.

Stereophonic Head



Telephone Attachment

Senior Radio Jack

Standard Radio Jack

Lightweight Headphones

Foot Control

No other manufacturer can boast of so wide a range of components and accessories devoted to the perfect reproduction of taped speech and music. Designed and developed in our own laboratories by a team of highly skilled acoustical engineers, the Truvox range of equipment represents years of patient research which has now reached full fruition by the introduction of the Truvox R2 Recorder. The available accessories provide almost limitless applications for this truly high-fidelity equipment.

Detailed literature available on request from

TRUVOX LIMITED

Sales Office: 15, Lyon Road, Harrow, Middlesex. Tel: Harrow 9282

Service & Technical Dept: 328 Station Rd., Harrow.

TRUVOX

to you who are concerned with electronic education:

Visit our exhibit in London next April 16 - 25 at the Olympia. We will be at the Instruments, Electronics and Automation Fair.

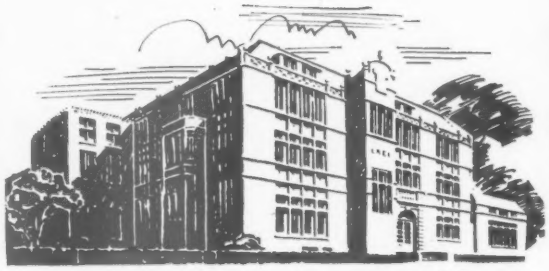

CREI Residence School Building, Washington, D.C.

Capitol Radio Engineering Institute, one of America's leading Technical Institutes, offers *advanced* courses in Electronic Engineering Technology and associated specialties both in residence and by correspondence. CREI is in its 31st year, and its many thousands of students and graduates are to be found throughout the world.

The CREI residence school offers an intensive three-year college-level course, accredited by the Engineers' Council for Professional Development, the nationally recognized accrediting agency for the accreditation of the curricula of engineering colleges and technical institutes in the United States.

FOR THE UPGRADING OF MEN ALREADY EMPLOYED IN SOME PHASE OF ELECTRONICS, the Correspondence Division offers the same programme, at the same level and with the same accreditation and recognition. Practical day-to-day work in the field takes the place of residence laboratory work.

This programme of study is used on an individual basis by thousands of students in all parts of the free world. In the United States and Canada dozens of leading electronic and aeronautical firms and Governmental Agencies utilize this programme on a group plan basis, for the Professional upgrading of their electronic personnel. Among these outstanding organizations are Canadian Broadcasting Corporation, Radio Corporation of America and United Air Lines, which have been clients for more than 10 years, Glenn L. Martin Co., Canadair, Trans-Canada Airlines, United States Information Agency (Voice of America) and many others.

It is planned to make this advanced electronics correspondence programme available very shortly through a British affiliate. You are cordially invited to visit our Exhibit at the Olympia in April. We shall be glad to send in advance our catalogue and complete information on our curricula.

MR. E. H. RIETZKE

Please write to:

E. H. Rietzke, *President*

CAPITOL RADIO ENGINEERING INSTITUTE

3224 Sixteenth Street, N.W.

Washington 10., D.C., U.S.A.

Introducing the A2521...

The NEW G.E.C. low noise grounded grid Triode

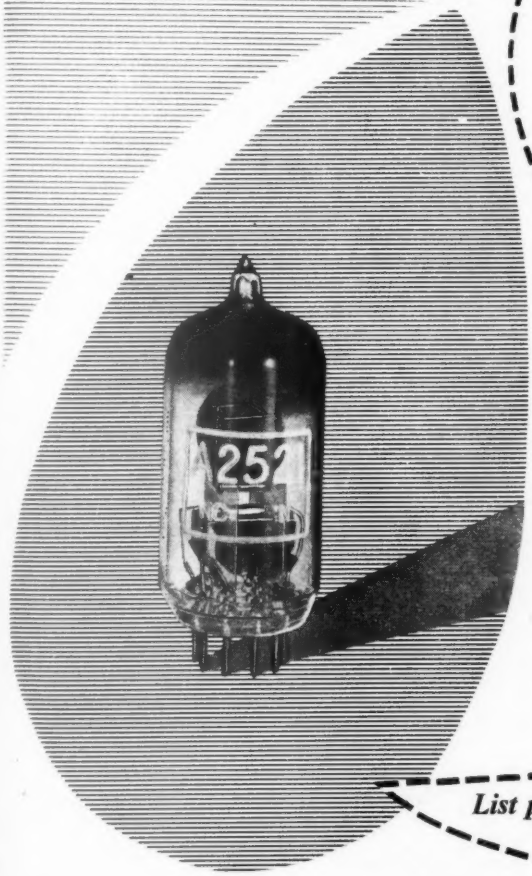

An indirectly heated high slope low noise triode, the A2521 is especially suitable for use as an RF amplifier at frequencies of up to 1,000 Mc/s. It is mounted on a B9A base.

FREQUENCY	NOISE FACTOR
900 Mc/s	12.0 dB
500 Mc/s	9.0 dB
300 Mc/s	6.0 dB

List price £3.10.0

A Product of the M-O Valve Co. Ltd., Brook Green, Hammersmith, London, W.6.
A subsidiary of:-
THE GENERAL ELECTRIC CO. LTD., MAGNET HOUSE, KINGSWAY, LONDON, W.C.2

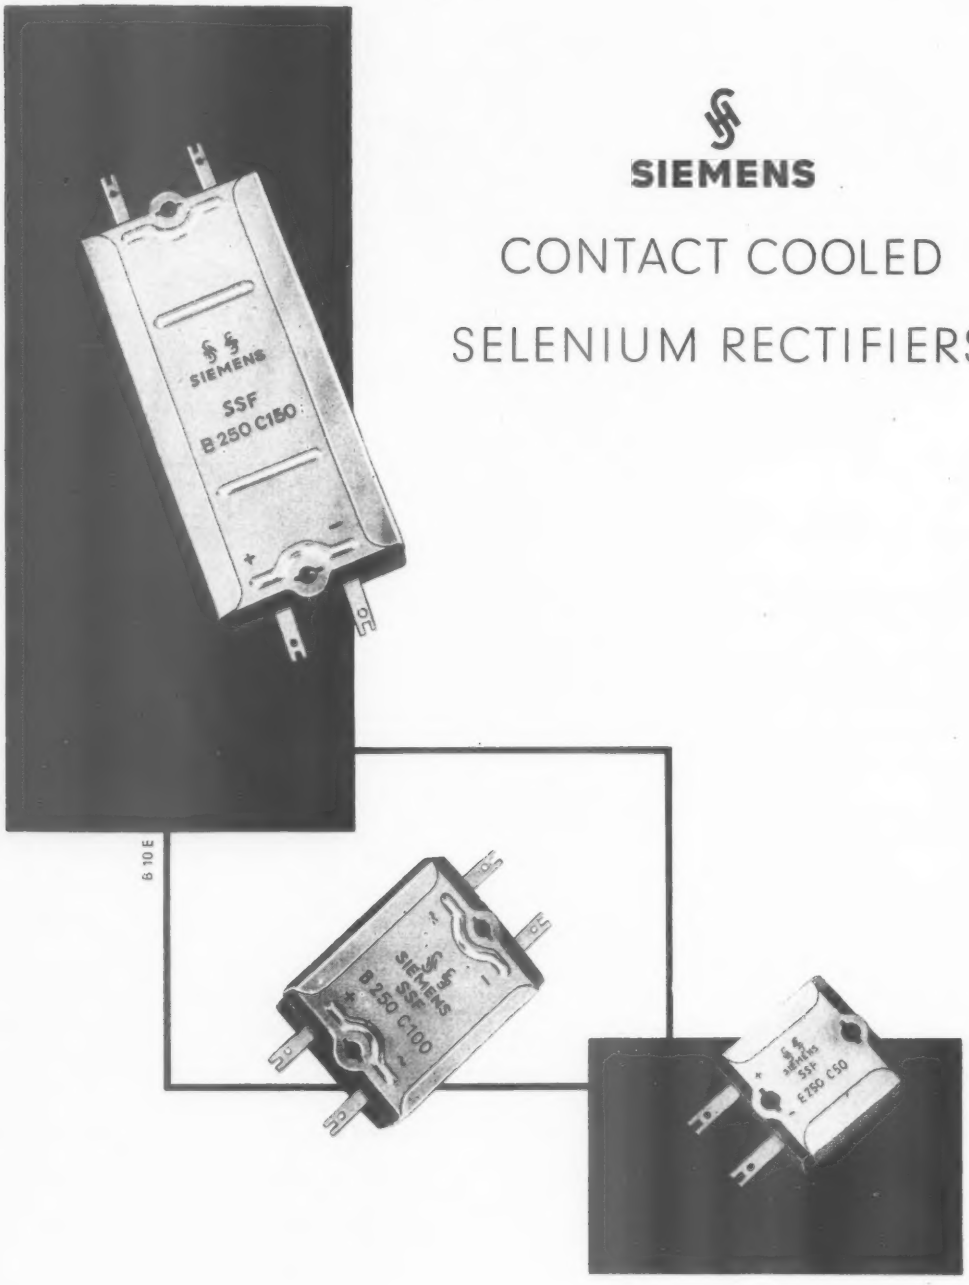

SIEMENS

CONTACT COOLED SELENIUM RECTIFIERS

SIEMENS & HALSKE AKTIENGESELLSCHAFT

BERLIN · MÜNCHEN

FULL PARTICULARS FROM

R. H. COLE (OVERSEAS) LTD.

2, Caxton Street · Westminster · London S.W.1

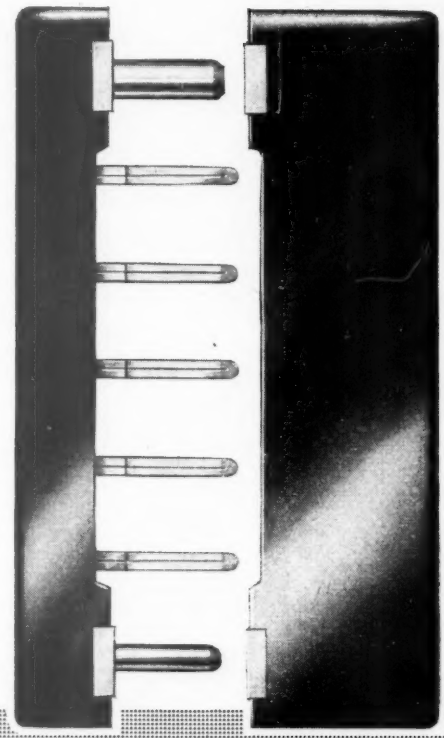

Putting 5 and 5 together

These In-Line Connectors are specially suitable for plug-in unit construction or small rack mounting equipment.

Well proven plug and socket contacts are used and exceptional freedom in dimensional tolerances of fixings etc. has been provided for.

5 and 7-Way versions are available and the Connectors can either be mounted direct to the panel where clearance is provided for contacts or mounted on stand-off pillars.

Location is provided by guide pins which are polarised to prevent incorrect insertion.

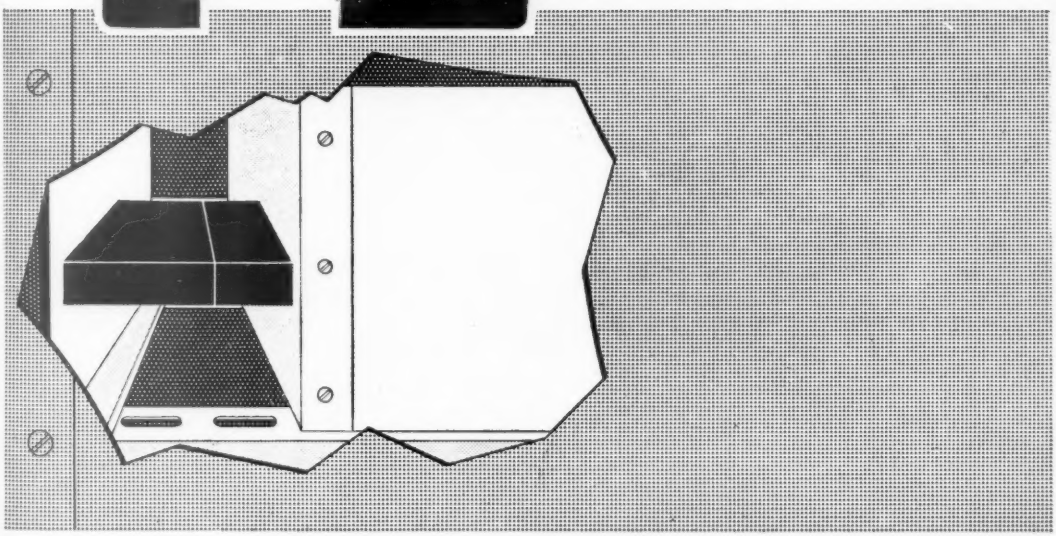

A.I.D & A.R.B — APPROVED

POWER CONTROLS
LIMITED

EXNING ROAD, NEWMARKET, SUFFOLK

Telephone: Newmarket 3181/2/3. Telegrams: Powercon Newmarket.

NOW
New Orthophonic High Fidelity
FROM VHF/FM

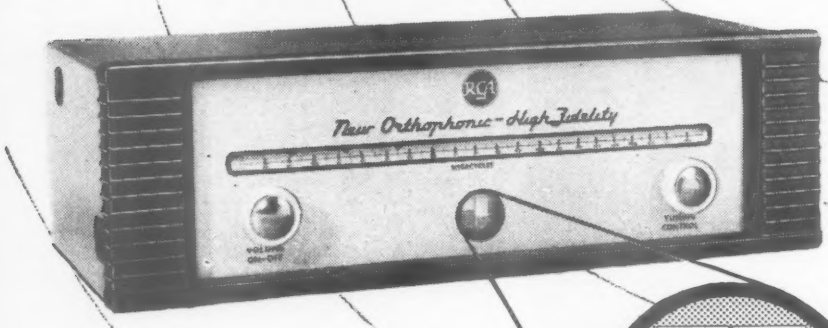



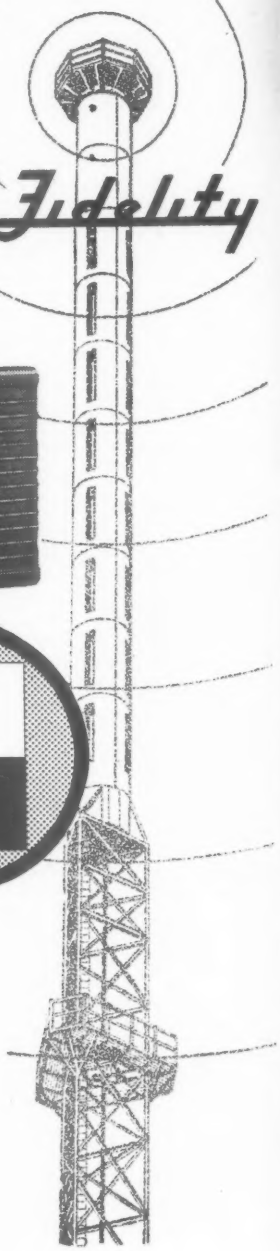

The RCA FM Tuner incorporates many new refinements, enables you to realise the great advances made in broadcasting bringing into your home a thrilling, living realism.

★ **Precision Tuning**
The new RCA Electron Ray Tuning Indicator makes exact tuning simplicity itself.

★ **No interference**
The FM system coupled with RCA circuitry results in exceptional signal-to-noise ratio.

★ **Extended Tuning Range**
87.5-108 *Mc/s covers the entire international F.M. broadcasting band.*

★ **Great Sensitivity**
2 *microvolts for 20 db quietening—extends the 'fringe' 7 valves plus 2 crystal diodes and Electron Ray tuning indicator.*

★ **High Fidelity**
Wide range response within 1 db from 20-15,000 *c/s for true High Fidelity reproduction.*

★ **No Matching Problems**
Adjustable output levels.

★ **Automatic Frequency Control**
Ensures complete freedom from drift.

★ **Power Requirements**
230-390 *volts D.C. at* 40 *milliamps H.T. supply.* 6.3 *volts,* 2.25 *amps heater supply (available from RCA New Orthophonic High Fidelity power amplifier).*

£24.3.0 plus £9.8.4 P.T.

RCA

RCA GREAT BRITAIN LTD.
(An associate Company of Radio-Corporation of America)
Lincoln Way, Sunbury-on-Thames, Middx.
Tel.: Sunbury-on-Thames 3101

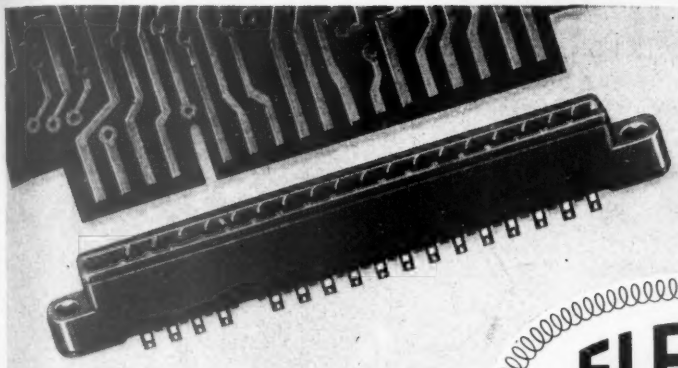

This K-18 connector is ACTUAL SIZE
—made under U.S. licence from Winchester Electronics Inc.

ELECTRO METHODS LTD
OF STEVENAGE

—the foremost manufacturers of

printed circuit connectors

NOW AVAILABLE FOR PROMPT DELIVERY

SERIES 'K'
with 6, 12, 18 & 22 contacts
CONTACT CENTRES .156"
END FIXING
Solder-cups or rivet ends

*

SERIES 'KKM'
with 6, 10, 12, 15, 18 & 22 contacts
CONTACT CENTRES .156"
END FIXING
Solder-eyelets

*

SERIES 'KM'
with 14, 21, 31 & 37 contacts
CONTACT CENTRES .078"
END FIXING
Solder-eyelets

*

Polarising-pins can be fitted in any position (This applies to each series)

GOLD-PLATED CONTACTS
made from spring-tempered phosphor-bronze
provide low contact-resistance, prevent corrosion and facilitate soldering.

MELAMINE MOULDINGS
conforming to B.S.S. 1322
provide high arc-resistance, high dielectric and mechanical strength.

Full technical data and illustrated leaflets forwarded on request:
ELECTRO METHODS LTD.
12-36 Caxton Way, Stevenage, Herts.
Telephone: Stevenage 780

PAINTON

By Appointment to the Professional Engineer

HIGH STABILITY CARBON RESISTORS



ELECTRICAL CHARACTERISTICS

The electrical characteristic of a High Stability Carbon Resistor depends upon the physical size of the units and upon the ohmic value. All the data given below relates to the Type 73 Resistor. To obtain the equivalent ohmic values to which the information is applicable in the other four sizes of Resistor the following factors should be applied :

Type 72 x ½ Type 74 x 2 Type 75 x 4 Type 76 x 8

FULL LOAD STABILITY

Up to 100 K.ohms the resistance change at full load with an ambient temperature of 70°C. is less than 0·75% (average 0·25%) after 1,000 hours operation. At 1 Megohm the change is less than 1% (average 0·75%).

N.B. On D.C. loading the maximum voltages stated in RCL 112 should be observed.

AGEING AND SHELF DRIFT.

Up to 100 K.ohms the average change is 0·25% in 12 months (never greater than 0·75%). For 1 Megohm resistors the average change is 0·6% in 12 months (never greater than 1·25%).

CLIMATIC

Exposure to the two cycles of H.I. humidity as laid down in RCS 112 shows a change of less than 0·7% (average 0·4%) up to 100 K.ohms. At 1 Megohm the change is less than 1% (average 0·7%).

TROPICAL EXPOSURE

Eighty-four days exposure to the standard 25°C./35°C. 100% humidity cycling shows a change of less than 1% (average 0·5%) up to 100 K.ohms. At 1 Megohm the change is less than 2% (average 1·6%).

TEMPERATURE COEFFICIENT

The temperature coefficient is less than 0·04%/°C. up to 100 K.ohms. At 1 Megohm the coefficient is approximately 0·055%/°C.

NOISE

Noise which is generated in a resistor, as the result of a direct voltage applied across it, varies according to the ohmic value of the resistor, the noise decreasing as the ohmic value increases. The noise is also influenced by factors such as the size of the resistor.

For noise which falls within frequency range of 0 to 10 Kc./sec., the Painton high stability resistors have noise levels which are between 0·05 and 0·4 microvolts of noise per applied direct volt, when the resistor is dissipating power at its maximum wattage rating.

VOLTAGE COEFFICIENT

Not exceeding 0·002% per volt D.C

DERATING FOR AMBIENT TEMPERATURES EXCEEDING 70° C.

WATTAGE RATING/AMBIENT TEMPERATURE GRAPH (FROM RCL 112, ISSUE 2)



COMMERCIAL DERATING CURVE



TYPE	RESISTANCE RANGE (ohms)	VALUES OUTSIDE THIS RANGE MAY BE QUOTED FOR SEPARATELY.		
72	±1% 4 — 700K	±2% 4 — 1·0M		±5% 4 — 2·5M
73	±1% 4 — 1·0M	±2% 4 — 2·0M		±5% 4 — 5·0M
74	±1% 20 — 2·0M	±2% 20 — 4·0M		±5% 20 — 10·0M
75	±1% 20 — 3·0M	±2% 20 — 5·0M		±5% 20 — 10·0M
76	±1% 20 — 5·5M	±2% 20 — 9·0M		±5% 20 — 50·0M

TYPE		72	73	74	75	76
Normal Commercial Rating 70°C—watts		¼	½	¾	1	2
R.C.S.C. style		RC2-E	RC2-D	RC2-C	RC2-B	RC2-A
R.C.S.C. Rating at 70°C—watts		¼	½	¾	1	1½
R.C.S.C. Rating at 100°C—watts		⅛	¼	½	¾	1
DIMENSIONS IN INCHES	A	⅜	11/16	1 1/16	1⅜	2 1/16
	B	1/16	1/16	1/16	1/16	1/16
	C	1⅛	1⅛	1⅛	1⅛	1⅛

PAINTON
Northampton England

BCC

H. F. PACKSET

TWO CHANNELS FOR DAY & NIGHT OPERATION

SIMPLE TO OPERATE — NO SPECIAL SKILL REQUIRED

PACKSET H.F. 15B TECHNICAL SPECIFICATION

Channel 1: 2.5—4.5 Mc/s.
Channel 2: 4.5—7.5 Mc/s.
Transmitter: C.W. or R.T. Power output 1.5 watts.
Receiver: 3.6 μV for 12 dB signal/noise ratio R.T.:
20 dB ratio C.W.
Power Supply: Vibratory. Two 2-volt accumulators.

BRITISH COMMUNICATIONS CORPORATION LIMITED

Wembley
Telephone: Wembley 1212

England
Cables: BeeCeeCee

TRANSISTORIZED PLUG-IN STAGES FOR HIGH-SPEED COUNTING



TS. 8

TS. 5

TS. 2A. 2B



TS. 20

TS. 10. 11

TS. 1. 4. 7. 14. 16. 18. 19

TS. 3. 6. 17



TS. 12



TS. 9. 13

Illustrated above is the Venner range of transistorized plug-in stages shown approximately ½ of their actual size. For details see table.

TABLE OF VENNER TRANSISTORIZED STAGES

Ref.	Name of Stage	Function of Stage	To Drive
TS1	1000 c/s Oscillator	Stable frequency source of ±1% tolerance. Sine wave and squarewave output.	TS3, 4, 6, 7, 14, 16, 17.
TS2A TS2B	Binary Unit	Provides one output pulse for two input pulses at PRF's up to 30 K.p.p.s.	TS2, 7 to 11, 13, 14, 16, 17, 18.
TS3	Wide Band Amplifier	Amplifies input voltage by a factor of approx. 1000 over a frequency range of 15 c/s to 125 kc/s.	TS2, 3, 4, 7, 8, 10, 11, 13, 14, 16, 17.
TS4	2-Stage Amplifier	Amplifies input voltage by a factor of 1000 over a frequency range of 120 c/s to 10 kc/s.	TS2, 4, 7, 8, 10, 11, 13, 14, 16, 17.
TS5	10 k/cs Crystal Osc.	Ultra-stable frequency source with an accuracy of 3 parts/million. Sine and squarewave outputs.	TS2, 3, 6, 7, 10, 11, 13, 14, 15, 16, 17.
TS6	Selector Gate	Schmitt trigger circuit. Basically intended for use with TS11.	TS2, 6, 8, 9, 10, 11, 13, 16, 17, 18.
TS7	Shaping Amplifier	Converts input waveforms into pulses suitable for triggering the Binary and Decade stages.	TS2, 8, 10, 11, 13, 16, 18.
TS8	Cycle Counter	Transistorized Electro-mechanical Counter which ensures correct operation irrespective of duration of input pulse.	May be used to reset TS2, 10, 11.
TS9	D.C. Relay Stage	Permits 5A, 250V changeover contacts to be operated from a 100 μA source.	May be used to reset TS2, 10, 11.
TS10/5	Decade Counter	Divide-by-ten or Divide-by-five stage, divides and counts inputs up to 30 K.p.p.s.	TS2, 8 to 11, 13, 16 to 18.
TS11	Decade Selector	Used in conjunction with 10 position switch and TS6 unit permits selection of any pulse 0-9.	TS2, 6, 8, 9, 10, 11, 13, 16, 17, 18.
TS12	Photohead	Sensitive photo-transistorized head for universal use. Direct coupled, anti-phase outputs.	TS3, 4, 6, 7, 8, 9, 13, 14, 16, 17, 18.
TS13	Triggered Relay Stage	Ensures 0.05 second operation of 5A 250V changeover contacts when pulsed.	May be used to reset TS2, 10, 11.
TS14	Pulse Shaper	Provides constant amplitude antiphase pulses for all inputs. Ideal for triggering binary and decade stages.	TS2 8, 10, 11, 13, 16, 18.
TS16	Universal Gate	Unity gain stage which can be switched ON and OFF by D.C. level change as provided, for example, by TS2B.	TS2, 3, 4, 8, 10, 11, 13, 15, 17, 18.
TS17	Twin Emitter Follower	Two separate high input impedance stages with low output impedances. Equivalent to cathode follower.	TS2, 3, 4, 6, 7 to 11, 13 to 18.
TS18	Period Timer	Provides D.C. voltage change for externally adjustable period. (Fixed internal period is 10 secs.).	TS2, 6, 8 to 11, 13, 16, 18.
TS20	Stabilized Power Supply	Provides 8-12V D.C. (adjustable) at 300mA when fed from 200/250V 50 c/s mains.	All stages.

The Venner range of transistorized plug-in stages has a potential life far greater than any valve operated stage. Components are subjected to little stress due to the low potentials associated with the transistor, and the correspondingly low power consumption. One nominal 10V supply is common to the range, as are the input and output connexions. Input leads have isolating condensers in series, output connexions are direct.

VENNER ELECTRONICS LTD.

Kingston By-Pass, New Malden, Surrey. **Telephone: MAL 2442 (9 lines)**

A member of the Venner Group of Companies

THESE HIGH Q COILS

are now even easier to install

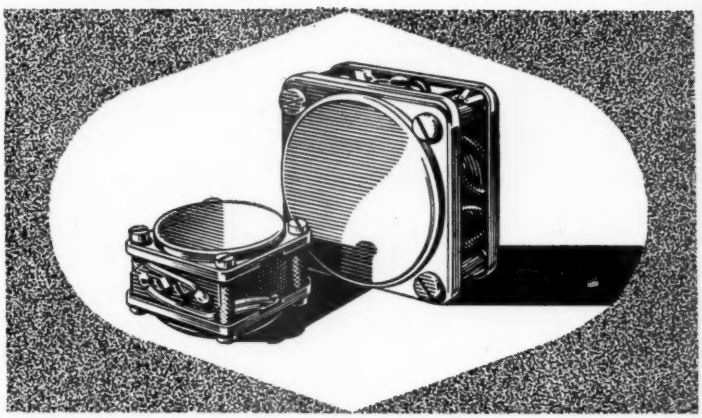

Designers of communications equipment, will welcome the new mounting and terminating arrangements of the Mullard 25mm and 36mm pot cores.

Unique design features that make installation easier than ever, include positions for tag boards on three sides and a new system of fixing, which eliminates the need for additional mounting plates.

Combining constructional advantages with sound technical performance, these 25mm and 36mm pot cores take full advantage of the low loss of Ferroxcube to produce inductances of up to 30 henries, together with high Q values over a wide frequency range. As an additional service these pot cores can be supplied wound to individual specifications, if required.

Write now for full details of the comprehensive range of Mullard pot cores currently available.

Outstanding features

* Controllable air gap, facilitating inductance adjustment
* Self screening
* Controllable temperature coefficient
* Operation over a wide frequency range
* Ease of winding, and assembly

Mullard

'Ticonal' permanent magnets
Magnadur ceramic magnets
Ferroxcube magnetic cores

Mullard Ltd., Component Division, Mullard House, Torrington Place, W.C.1

MC 257
C

WORLD

FAME

ASSURED

When we introduced the Goldring "500" Variable Reluctance Cartridge our claim for it was a modest one—simply that it was a very good high fidelity cartridge at a very reasonable price. Amateurs and experts throughout the world have described the "500" in rather more glowing terms, and we have been happy to accept their judgment. But we have not been content to leave matters there. Development work has proceeded on a new cartridge—*the first in Great Britain to be designed specifically around a diamond stylus*. Full advantage has been taken of the technical superiority of the diamond and, in addition, its long playing life obviates the need for compromise between optimum mounting arrangements and extreme simplicity of stylus replacement. This new cartridge—the "600"—will delight both the musically meticulous and the hi-fi "fanatic". Our claims for it are not this time so modest. The reception of the "500" points clearly to the "600" being destined for world fame.

The "600" is similar in shape and size to the latest version of the "500". Replaceable styli —diamond for L.P. and sapphire for 78 r.p.m. Mu-metal shield. Specifications for both cartridges are broadly the same but the "600" has a much-extended frequency response, the effective mass at stylus tip is halved and compliance is substantially increased. Improved transient response and "presence" are not easily defined mathematically but are very evident aurally.

***Price 8 gns** plus P.T. £3.5.6*

GOLDRING '600'

GOLDRING
MANUFACTURING COMPANY
(GREAT BRITAIN) LIMITED
486-488 High Rd, Leytonstone, London E11
Leytonstone 8343



BREAKDOWN TESTER MODEL RM 215E

Output Voltage: 0 to 10,000 V D.C. 5 mA. Max.
and 0 to 5,000 V A.C. 10 mA. Max.

Accurate —reliable!

MEGOHMMETER

MODEL RM 175 — LZ MK II

Resistance Range: 0.9 Megohm to 10,000,000 Megohms.

Test Pressure: Continuously variable from 10 to 1,000 V D.C.

BPL

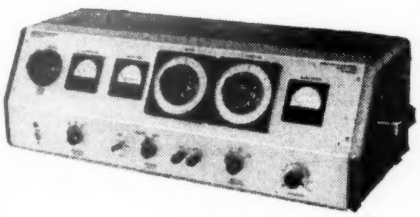

ELECTROLYTIC & TANTALUM

CONDENSER BRIDGE MODEL CB 154C

Capacity Range: 0.1 mFd to 11,000 mF ds
Power Factor Range: 0.4% to 30%
Polarising Voltage: 0 to 600 Volts in 5 ranges.
Leakage Current: 0/500 uA, 0/5 mA, 0/50mA.

MODEL CB 154D

Polarising Voltage: 0 to 800 Volts in 5 ranges.
Leakage Current: 0/50 uA, 0/500 uA, 0/5 mA.
Other details as CB 154C.

Ask for demonstration

BRITISH PHYSICAL LABORATORIES

RADLETT · HERTS
ENGLAND

TELEPHONE · RADLETT 5674

A Switch Idea —that's near perfection

Introduced to Britain by Plessey, the unique principle of 'Wedgelock' fixed contacts in switch construction has gained nation-wide acceptance, and an ever-increasing number of manufacturers are now specifying Plessey 'Wedgelock' Switches for many applications. Contacts are '*Wedgelocked*' into the stators which are securely held to guarantee positive location in all switching positions. Continuous contact efficiency is assured because even excessive tangential pressure will not distort the contact clips.

Design Engineers who have not yet received a copy of the new, comprehensive Plessey Switches Catalogue are invited to send for Publication No. 922.

PLUS POINTS of G.A.1. Switches are:

- ✳ **Double-wiping, self-cleaning contacts**
- ✳ **Accommodation for up to 22 insulated contacts per wafer**
- ✳ **Up to 12 positive positions can be utilised —30° indexing (a special 60° index plate can be supplied if required)**
- ✳ **Provision for unusual circuit arrangements**
- ✳ **Single- or multi-wafer construction**
- ✳ **Variable overall dimensions**
- ✳ **Provision for electrostatic screening by metal shields between adjacent banks**

Plessey

COMPONENTS GROUP • SWITCH UNIT
THE PLESSEY COMPANY LIMITED • NEW LANE • HAVANT • HANTS • Tel: HAVANT 1311
Overseas Sales Organisation: PLESSEY INTERNATIONAL LIMITED • ILFORD • ESSEX • Telephone: ILFORD 3040

CO1

G.E.C. CATHODE RAY TUBES

for Oscillography

Photograph reproduced by courtesy of British Communications and Electronics

The recently advertised 4GP., 5BHP and 6EP cathode ray tubes are only three of a wide range of instrument tubes marketed by the G.E.C.

The range includes both electromagnetic and electrostatic deflection tubes and all are generally available with any one of six standard screen phosphors. Other screen phosphors can be supplied to special order.

Should you have any cathode ray tube problems—consult the M-O Valve Company. You will most probably find a tube in the range which is ideally suited to your particular application. If not, the Company with its wealth of experience and technical facilities may be able to make a special tube for you.

Some of the many products of the M-O Valve Co. Ltd.

Transmitting Valves
Industrial Heating Valves
Pulse Valves
Audio Frequency Valves
Instrument Valves
High Figure of Merit Valves
Low Noise Valves
Series Stabiliser Valves
Rugged Valves
Vacuum Rectifiers
Mercury Rectifiers
Xenon Rectifiers
Magnetrons
Klystrons
T. R. Cells
Corona Stabilisers
Geiger-Müller Tubes
Special Purpose Cathode Ray Tubes
Radar Cathode Ray Tubes

Products of the M-O Valve Company Limited, Brook Green, Hammersmith, W.6 a subsidiary of
THE GENERAL ELECTRIC COMPANY LIMITED, MAGNET HOUSE, KINGSWAY, LONDON, W.C.2



0-5 amp. D.C. Meter. M.I. 2½in. F/M, as illustrated above. Ideal for Battery Chargers. New. **11/6.** P. & P. 1/-.

0-300 v. A.C. Meter, M.I. 2½in. F/M. New. **£1/5/-** each. P. & P. 1/-.

Dual range pocket volt meter 0-25 and 0-250 v. in wallet. New **12/6** each. P. & P. 1/-.

0-500 Microammeter, 2in. m/c., calibrated 0-15 and 0-600 v., as used on No. 19 sets. Ex equipment, but individ. tested. **14/6** each. P. & P. 1/-.

Oil filled Capacitors. U.S.A.
2 mfd. 1,000 v. **4/6** each. P. & P. 2/-.
4 mfd. 600 v. **5/6** each. P. & P. 2/-.
7 mfd. 600 v. **8/6** each. P. & P. 2/-.
.2 mfd. 5 kV. **3/6** each. P. & P. 2/-.

ARMOUR Recording Wire. U.S.A. Top Quality on original reels, length 3,700 yds. **17/6.** P. & P. 1/6. New.

Rheostat, 12 ohm 4 amp. Ideal for Battery chargers, etc. New. **7/6.** each. P. & P. 1/6.

Lightweight **Headphones** (imported). 4,000 ohms., res., as illus. above. New. **15/-** each. P. & P. 1/6.

IVALEK lightweight British **Headphones,** 2,000 ohms. New. **12/6** each. P. & P. 1/6.

M/C Headphones by S. G. Brown, fitted with ear pads. L.R. Good condition. **12/6** each. P. & P. 1/9.

H.S.38. U.S.A. miniature ear pieces fitting inside the ear. Magnetic type, L.R. New. **15/-** each. P. & P. 1/6.

Low impedance Ear Pieces, as used in flying helmets. Type 13466. New. **3/6** each. P. & P. 1/-.

Throat Microphone, magnetic, British. New. **4/6** each. P. & P. 1/-.

Throat Microphone, carbon, U.S.A. New. **3/6** each. P. & P. 1/-.

No. 8 Microphone, carbon insert, with switch. New. **7/6** each. P. & P. 1/6.

Microphone, type 48, 10A/14381 as fitted in oxygen mask. R.A.F. patt. New. **3/6** each. P. & P. 1/-.

Telephone handsets, sound power, pair will work by simple connection without batteries. Good condition. **22/6** each. P. & P. 1/9.

Telephone Handsets, U.S.A. Similar to G.P.O., with switch, carbon insert. New. **12/6** each. P. & P. 1/6.

Morse Keys, 8 ampere. Service Patt. New. **2/6** each. P. & P. 1/-.

PHOTO MULTIPLIER, Type 931A, for alfa counting, film scanning, spectography, etc. New. **£2/5/-** each. P. & P. 1/-.



MINIATURE LEAD ACID ACCUMULATORS, made by famous British Manufacturer to most stringent service requirements. Brand new, uncharged, without acid, in original sealed cartons. Capable of being constantly charged. Conservatively rated.
12 volt 0.75 amp., size 4in. x 3in. x 1⅞in. plus ⅝in. protrusion of terminals. Weight with acid 2lbs. 4oz. **22/6** each plus 2/3 P. & P. C.W.O.
2 volt 1.5 amp. size 4in. x 1½in. x 1⅝in. plus ⅝in. protrusion of terminals. Weight with acid 11 oz. **7/6** each plus 1/6 P. & P. C.W.O. Special offer the two **28/-** plus 2/9 P. & P.



AIRCRAFT CAMERA G45B. Mk. III, fitted with f/3.5 triple anastigmatic lens. Takes 25ft. of 16 mm. film. Fitted with 24 volt motor. Mint condition, new in maker's original packing. **£6/15/-** each. P. & P. 3/6.



WHEATSTONE BRIDGE, four stud switches, galvonometer centre zero F.S.D. 2.5 mA, in solid wooden carrying case Excellent condition. **40/-** each. P. & P. 3/6.



Evershed "MEGGER" Circuit testing ohms Meter. Pattern "S" complete with testing prods, inst. book etc., 2 ranges 0-3 ohms and 0-30 ohms. Brand new, guaranteed perfect, as illus. Offered at fraction of makers' price. **£4/17/6** each. P. & P. 2/6.

Evershed "WEE MEGGER" Insulation Testers.

Guaranteed to specification.

100 V. / 250 V. / 500 V. — Wee Megger with leather case. New.	£6 0 0 / £10 10 0 / £12 10 0
500 V. Series 2. Metal case. Good cond. ...	£20 0 0
500 V. Series 2 with Bridge, Varley loop test. As new	£60 0 0

Add carriage.

U.S.A. NAVY MODEL "MAN" Crystal Controlled Radio Transmitter and Receiver, for voice, by frequency modulated signals in the 30-40 megacycle band. Choice of eleven frequencies, powered by 6 v. battery. Complete with valves, crystals etc., and spares. Unused, **£25.** Carr. Eng. £1.

15in. RCA U.S.A. **P.M. Speaker,** 15 ohms. Ideal for P.A. Will handle 30 watts. New, in maker's carton and case. **£9/17/6** each. Carr. in England 15/-.

High Speed Relay, Siemens, two bobbins 1,000 ohms, each. New. **10/6** each. P. & P. 1/-

Londex Relay, 24 v. heavy silver contacts, two breaks. Fair condition. **4/6** ea. P. & P. 1/-.

Fishing Rod Aerials, 12ft. (3 x 4ft. sections). Steel, copper plated, tapered top. Ideal aerial or fishing rod. Fair cond. **8/6** each. P. & P. 2/6.

Muirhead Vernier Drive. Scaled 0-180° ratio 31/1, dia. 3in., as fitted to RF.26 Units. Complete with lampholder. In manufacturers' original packing. New. **8/6** each. P. & P. 1/6.

Neon Light, 230 v. A.C. M.B.C. Clear. **1/9** each. P. & P. 6d.
Neon panel mounting indicator lights, with flying leads, chrome bezel. 200/250 v. Red, clear and green. New. **3/9** each. P. & P. 6d.
Ultra Violet Bulb, AC/DC, 12 v. 36 watt. New. **5/6** each. P. & P. 6d.

Radial Stud Switch, 20 segs. 5in. sq. Complete with handle and housing. New. **5/-** each. P. & P. 2/-.

Contactor Time Switch, two impulses per second. In sound-proof box. New. **11/6** each. P. & P. 3/-.



L.T. Transformer, input 230 v. Output 50 v., 50 ampere, but adjustable by voltage regulator switch on primary. In steel case fitted with mains switch, will take 100% overload. Grs. Wt. 150 lbs. Wound at 800 amps. per sq. in. As illus. above. New in manufacturer's cases. **£15** each. Carriage in England £1.

Auto Transformer, step up, step down, 110 v.-200-220-240 v. Fully shrouded. New, not ex W.D.
300 watt type **£2/2/-** each. P. & P. 4/6.
500 watt type **£3/3/-** each. P. & P. 4/6.
1,000 watt type **£4/4/-** each. P. & P. 4/6.

Eddystone Mains Transformer, tapped primary, secondary HT 180-0-180 v. at 80 mA. L.T. 12.6 v. at 2 amp., 5 v. at 2 amp. In maker's cartons. **8/6** each. P. & P. 3/6.

Potted L.T. Transformer. Oil filled. Input 230 v. Output 2-4-14-22-30-38 v. at 7 amp. Conservatively rated. New **£2/15/-** each. Carr. in England 6/6.

10 way cable 14/36 P.V.C. screened and P.V.C. overall six colours. **2/6** per yard, add post.

24 V. Blower Motor. AC/DC, will run on 12 v. Operational condition. **12/6** each. P. & P. 3/-.

U.S.A. Geared Motors, 27 v. D.C. giving twin outputs of 20 r.p.m. and 6 r.p.m. Size 7in. x 1⅞in., ¼in. shaft. Will operate on 12 volts. Operational cond. **19/6** each. P. & P. 3/-.

Miniature 24 v. D.C. Reversible Recorder Motors, fitted governor and right angle gear drive. 3in. x 1in. x 1¼in. New **12/6** each. P. & P. 2/-.

Dynamotor. Input 12 v. D.C., output 300 v. D.C. at 215 mA. Supplied tested. **£1/10/-** each. P. & P. 3/6.

SERVICE TRADING Co.

PERSONAL CALLERS ONLY : **9 Little Newport Street, London W.C.2.** *Tel : GER 0576.*
ALL MAIL ORDERS : *Early Closing Thursday* **47-49 High Street, Kingston-on-Thames.**

ACOUSTICAL

For the closest approach to the Original Sound— that your enjoyment and appreciation of music may be unimpeded





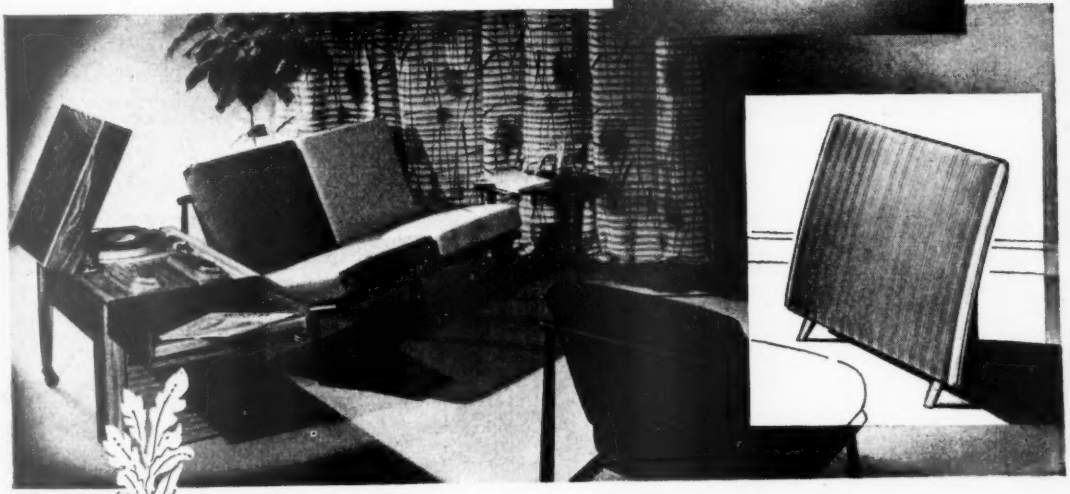

Please ask for illustrated literature describing the QUAD II Amplifier, FM Tuner and Electrostatic Loudspeaker.

ACOUSTICAL MANUFACTURING CO. LTD.
HUNTINGDON, HUNTS.
HUNTINGDON 361.

THE SERVISCOPE

REGD TRADE MARK

DC TO 6 Mc/s

TIME AND VOLTAGE CALIBRATION

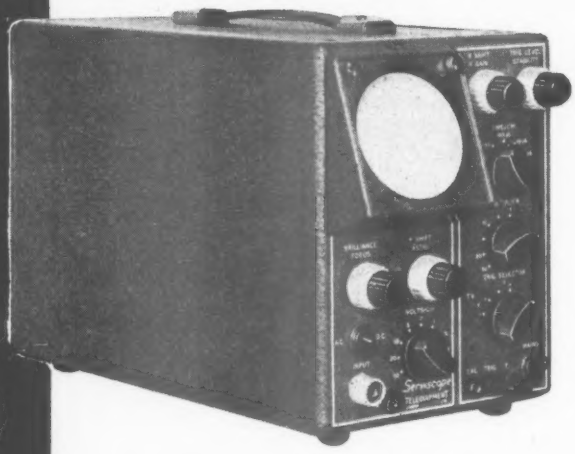

A PORTABLE HIGH PERFORMANCE MEASURING OSCILLOSCOPE

★ INCORPORATES AN ENTIRELY NEW TYPE OF TIME BASE
formerly only available on the most expensive American oscilloscopes.

★ 18 PRE-SET CALIBRATED SWEEP SPEEDS FROM
.5 sec/cm to 1 μ sec/cm

★ AUTOMATIC TRIGGERING OR TRIGGER LEVEL SELECTION

★ DC COUPLED UNBLANKING

★ 9 CALIBRATED Y SENSITIVITIES
FROM 100 mV/cm to 50V/cm ALL DC TO 6 Mc/s

★ SWEEP EXPANSION TO OVER 10 SCREEN DIAMETERS

★ BUILT-IN TV SYNC SEPARATOR

★ ULTRA BRIGHT 3″ FLAT FACE CRT

★ COMPLETELY PORTABLE 8″ x 6″ x 12″

THE FINEST, MOST VERSATILE

portable oscilloscope ever offered to the electronics industry.

Write for fully illustrated leaflet.

TELEQUIPMENT LTD

313 Chase Road, Southgate, London N.14. PALmers Green 7111

no rungs missing in the ladder of our range

of **QUARTZ CRYSTALS**

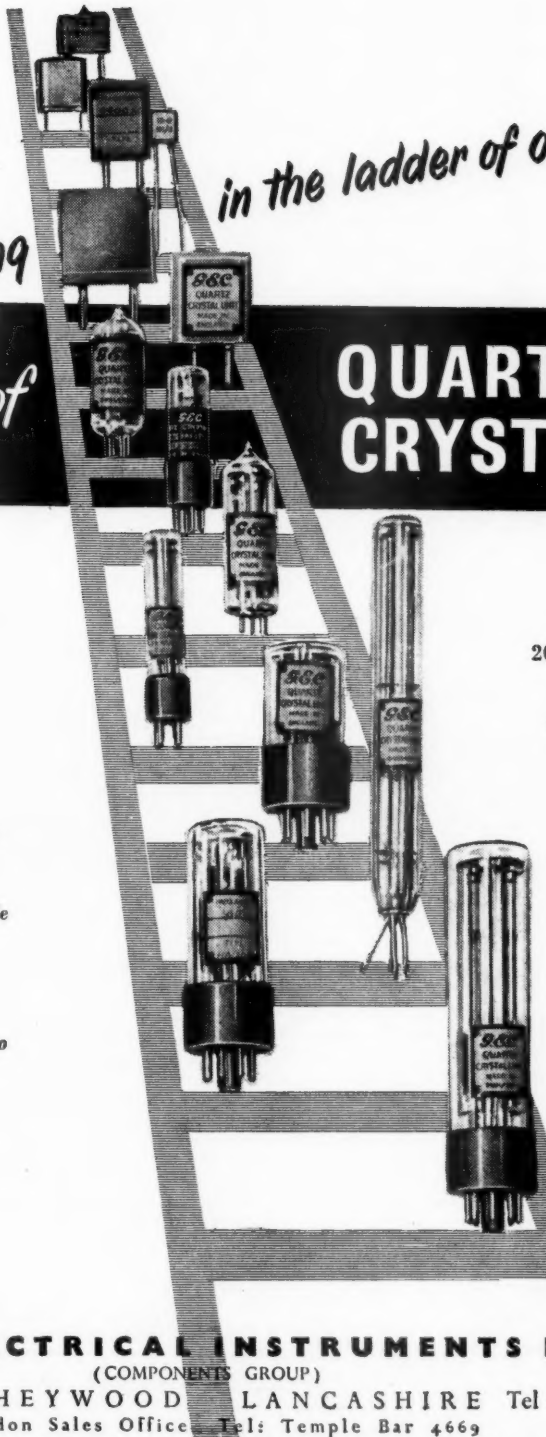

G.E.C.

From
200 cycles/sec.
to
90 Mc/sec.

For long term stability and unfailing activity, G.E.C. Quartz Crystal Units provide the basis for reliable communications systems.

A complete range of units to meet D.E.F. 5271 and R.C.L. 271 Inter Services styles can be supplied.

SALFORD ELECTRICAL INSTRUMENTS LIMITED
(COMPONENTS GROUP)
TIMES MILL · HEYWOOD · LANCASHIRE Tel: Heywood 6868
London Sales Office Tel: Temple Bar 4669
A SUBSIDIARY OF THE GENERAL ELECTRIC CO. LTD. OF ENGLAND

FLEXIBLE REMOTE CONTROL OUTFITS

Our experience in the industrial field has indicated that there is a definite need for this type of outfit offering facilities for making prototype flexible remote controls as required.

The two gauges of Remote Control flexible shafts in these outfits cover the range of torque loadings required for • volume controls • all types of wave change switches • condensers • all controls likely to be met in electronic, radio and television equipment.

The outfits are reasonably priced and comprise:

No. 130 (.130 in. dia.) for remote controls up to 4 inches long
No. 150 (.150 in. dia.) for remote controls up to 6 inches long

(For use without flexible casing. Longer controls with flexible casing made to order)

THE S·S·White CO. OF GREAT BRITAIN LTD. INDUSTRIAL DIVISION

BRITANNIA WORKS, 25-31 ST. PANCRAS WAY, LONDON, N.W.1. *Telephone: EUSton 5393*

The S. S. White Company will be pleased to advise which Outfit is most suitable for specific applications.

A detailed Parts and Price List is available upon request to Dept. W.

R.C2



NOW available from stock!



Anyone can use them!



GOLTOP POWER TRANSISTORS

Type V 15/10P **20/-** **each retail.**

TYPE V 15/10P, one of the regular range of Goltop germanium-alloyed p-n-p junction transistors, is suitable for a number of power applications of which the following is typical.

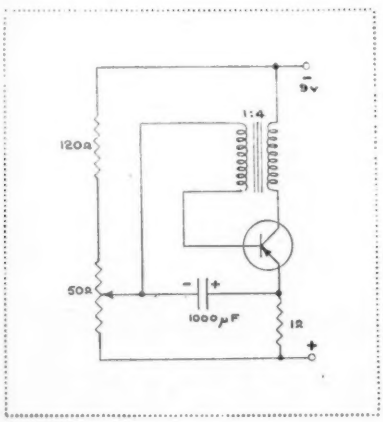

LOW FREQUENCY OSCILLATOR

This oscillator, employing a V 15/10P transistor, is suitable for the generation of power in the sonic or ultrasonic range. The output is about 1 watt, the output impedance being 30 ohms. (With adjustment of load and the provision of suitable cooling arrangements, the output may be up to 6 watts.) The waveform is dependent on the DC conditions, which may be adjusted by means of the 50-ohm potentiometer. The collector winding resistance should be less than 0.25 ohm. Power output may be increased by adjusting the amount of feedback to the base. At large power outputs the transistor may be driven from the bottomed to the cut-off condition, which reduces the power dissipation in the transistor: this condition is useful where distortion is unimportant.

Obtainable direct from the manufacturer. Trade enquiries invited. Full technical data on application.

British Design, Materials and Craftsmanship

Newmarket Transistor Co. Ltd.

Exning Road, Newmarket. *Telephone: Newmarket* 3381.

Thyratrons

for...

Relay operation

Electronic switching

Servo systems

Regulated A.C. or D.C. power supplies

Computers

Motor Control

These thyratrons are designed for the continuous control of currents up to 1.6 amperes.

They are being used to actuate solenoids and electromechanical devices of all kinds as well as for direct electronic switching.

Characteristic advantages of thyratron control are smooth and continuous control of current, negligible control power and high power efficiency.

The four valves listed have a rare gas filling which makes for operation over a wide temperature range, a quick heating-up time and a free mounting position.

Many tens of thousands of small thyratrons are made every year by Mullard and there is a fund of experience available for your assistance in selecting and operating individual types.

Write for free leaflet "Thyratrons for the control of small currents".

PREFERRED RANGE OF SMALL THYRATRONS

Mullard Type No.	American Type No.	Services Type No.	Max. Av. Cathode Current (Amps)	P.I.V. Max. (Volts)
EN92	5696	CV3512	0.025	500
*EN91	2D21	CV797	0.1	1300
EN32	6574	CV2253	0.3	1300
XR1-1600	5796	CV3706	1.6	1500

Special quality version available.

Mullard

COMMUNICATIONS AND INDUSTRIAL VALVE DEPARTMENT

MULLARD LTD · Mullard House · Torrington Place · London WC1 · LANgham 6633

MVT 340



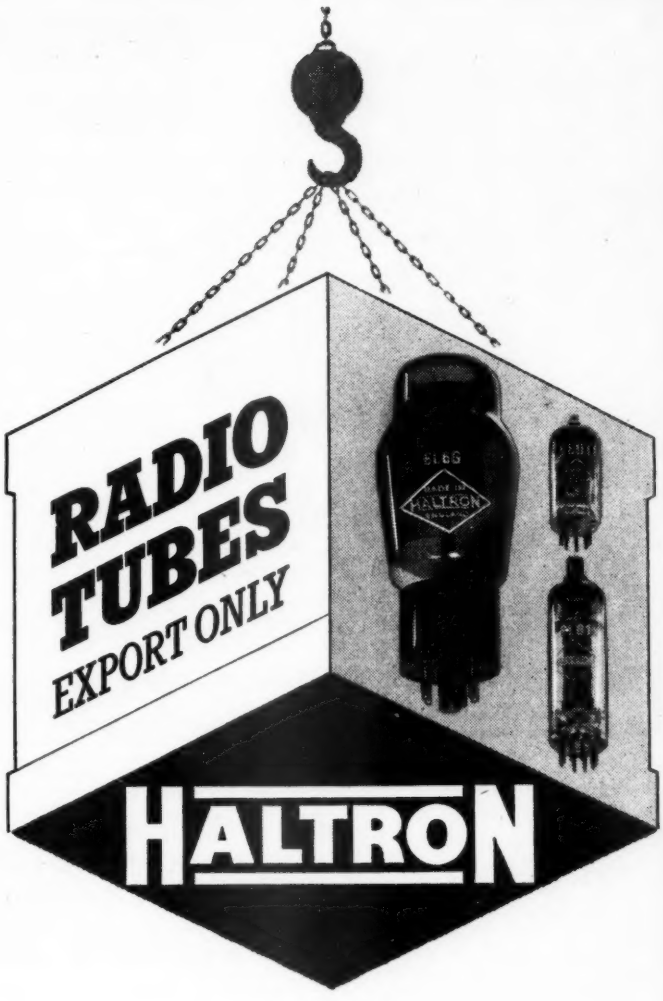

It is gratifying to know that in a world of rising prices our policy of maintaining and, in many instances, reducing prices has resulted over the years, and especially at this period, in ever increasing sales.

We carry a stock of 2,000 types of receiving, transmitting and special purpose tubes, and invite your enquiries not only for commercial grade tubes but also for those tested to C.V., JAN and MIL specifications.

Our Organisation is A.R.B. Approved.

If you are not already on our Mailing List, please send for latest Price and Stock Lists.

HALL ELECTRIC LTD

Haltron House, 49/55 Lisson Grove, London, N.W.1

Telephone:
AMBassador 1041 (5 lines)
Cables:
Hallectric, London
TELEX 2-2573

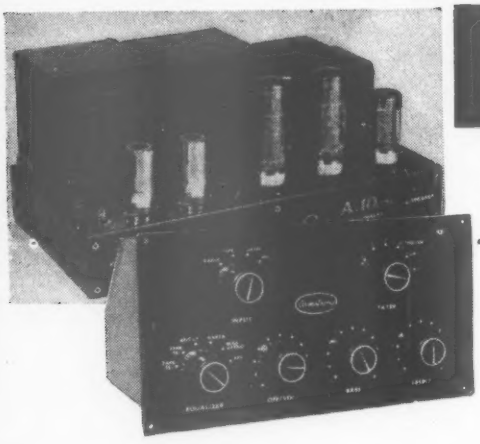

Armstrong **A10** MARK II

HIGH FIDELITY AMPLIFIER & PRE-AMPLIFIER CONTROL UNIT

BRIEF SPECIFICATION. *Output:* 10 watts rated; 20 watts peak. *Frequency Response:* 10-100,000 c.p.s., within 1dB 15-30,000 c.p.s. *Distortion:* less than 0.1%. *Damping Factor:* 40. *Hum Level:* Better than 80dB down. *NFB:* 3 loop, main overall loop 28dB. *Sensitivity:* 8mV (Gram input A) for 10 watts. *Spare Power Supplies:* 320v, 45mA and 6.3v, 2A. *Valves:* Pre-amp ECC83, EF86. Amplifier GZ34, ECC85, EF86, 2 x EL34's. *Controls:* 1. INPUT—Mic, Radio, Tape, Gram (in conjunction with 4 position pick-up matching selector). 2. EQUALISER—6 position. 3 FILTER—6 position. 4 & 5. BASS & TREBLE (both lift & cut 15dB). 6. VOLUME. *Tape Output Socket* on rear of Control Unit.

Matching VHF Tuner—FM61—£22/1/0. *(See also page 173)*

PRICE **£32** COMPLETE

AVAILABLE FROM LEADING HIGH FIDELITY DEALERS THROUGHOUT THE COUNTRY

Write for free descriptive literature to Dept WWF. ***Armstrong Amplifiers Ltd.*** WARLTERS RD. HOLLOWAY LONDON N7

an ARMSTRONG is a sound investment!

MAXI-Q REGD

WE PROUDLY PRESENT OUR LATEST HIGH STANDARD LOW PRICED INSTRUMENT WHICH WE KNOW WILL BECOME A PRIZED AND INDISPENSABLE POSSESSION IN EVERY CONSTRUCTOR'S SHACK

MODULATED TEST OSCILLATOR MTO.1

- ★ Provides a modulated signal suitable for I.F. alignment also trimming and tracking R.F. circuits.
- ★ Frequency is continuously variable from 170-475 kc/s and 550-1,600 kc/s.
- ★ Operates from a single 9 volt grid bias battery (not supplied) which is housed within the unit.
- ★ The case is manufactured from steel and is finished in matt black cellulose. The front panel is gloss black bearing white lettering. Dimensions are $5\frac{1}{16}$in. x $4\frac{1}{16}$in. x 3in.
- ★ Supplied with full operating instructions.

PRICE £3/15/-.

Obtainable from all reputable stockists or from works. General Catalogue covering technical information on full range of components, 1/- post paid.

DENCO (CLACTON) LTD
(DEPT. W.W.)
357/9 Old Road · Clacton-on-Sea · Essex

STOP PRESS MAXI-Q PRE-SET F.M. TUNER, completely assembled at £12. VARIABLE VERSION, £11. COMBINED POWER PACK and AMPLIFIER, £5/10/-, or in comprehensive kit form at £5. Trading Terms for direct postal orders, C.W.O. plus appropriate postal charges. Please send S.A.E. with all enquiries.

FORMICA* *decorative laminates . . .*

FORMICA *extrusions . . .*

and

FORMICA*

industrial laminates

The various plastics enterprises of Thomas De La Rue & Co. Ltd. have become so important that a separate Company has now been formed to direct them. And that Company is called FORMICA LIMITED.

As a result the electrical and industrial laminates hitherto sold as 'DELARON' and the engraving material 'Traffolyte', will be known collectively as FORMICA industrial laminates. The name is an honourable one, and easy to remember. The products will go on from strength to strength.

Indeed, when a plastics product is branded 'FORMICA', be it flat or tubular, rigid or pliable, you'll know it's the best of its kind in the world.

FORMICA* *industrial laminates*

paper-based, fabric-based, glass-based (and copper-clad)

* FORMICA *is a registered trademark*

FORMICA LTD, DEPT D 120, DE LA RUE HOUSE, REGENT ST, LONDON W.1

ADCOLA

(Regd. Trade Mark)

SOLDERING INSTRUMENTS
& ALLIED EQIPMENT

ILLUSTRATED
DETACHABLE
⅛" BIT MODEL
LIST NO. 64

Protective
Shield
List No. 68

ADCOLA
LONG LIFE BITS
AVAILABLE
FROM STOCK

CATALOGUES HEAD OFFICE SALES & SERVICE

ADCOLA PRODUCTS LTD.,
GAUDEN ROAD,
CLAPHAM HIGH ST.,
LONDON, S.W.4.

TELEPHONES:
MACaulay 3101
& 4272

ARCOLECTRIC SWITCHES

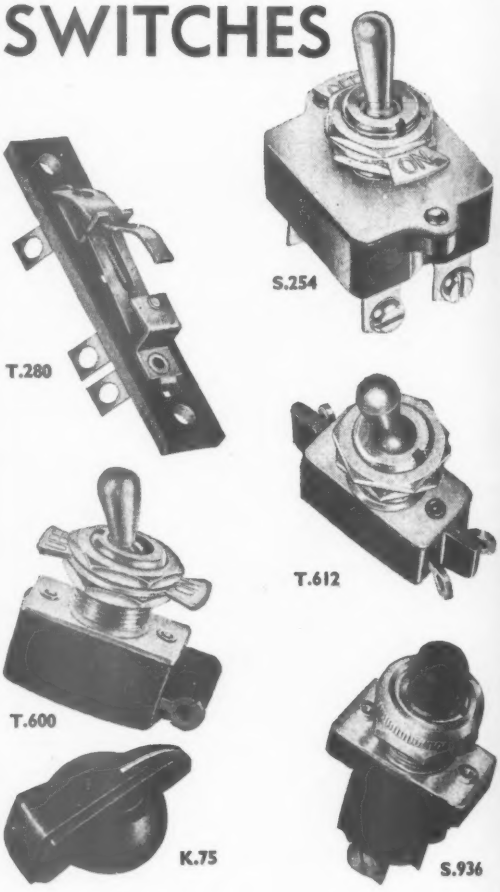

S.254: 10-amp. Double Pole Toggle Switch.
T.280: Sensitive Snap Action Switch.
T.612: 3-Terminal Single Pole Change-over.
T.600: 3-amp. Toggle Switch.
S.936: Push Switch, available normally On or Off.
K.75: Small Pointer Knob for ¼in. spindles.

Write for Catalogue No. 131

ARCOLECTRIC
SWITCHES · LTD

CENTRAL AVENUE, WEST MOLESEY, SURREY

CATHODEON

Prompt delivery and competitive prices of all crystal types in the frequency range 1,000 Kc/s to 75,000 Kc/s.

CATHODEON CRYSTALS LIMITED
LINTON · CAMBRIDGESHIRE
Telephone: LINTON 501 (3 lines)



TAKE YOUR PICK

Our wide range of capacitors, incorporating all the latest developments, are described fully in these new leaflets...

SEND NOW for COPIES

DALY has succeeded in maintaining full capacity values and working voltages in more compact designs, specially suited to ultra modern equipment :—

PHOTO-FLASH EQUIPMENT • DEAF AIDS
PRIVATE TELEPHONE INSTALLATIONS
AMPLIFIERS • D.C. POWER UNITS
TRANSISTOR EQUIPMENT
MAGNETISATION EQUIPMENT
TEST GEAR

DALY
ELECTROLYTIC CAPACITORS

Condenser Specialists for over 20 years.

DALY (*Condensers*) **LTD.,** WEST LODGE WORKS,
THE GREEN, EALING, LONDON, W.5. Phone: Ealing 3127-8-9. Cables: Dalcyon, London

PIRTOID

SYNTHETIC RESIN BONDED LAMINATE

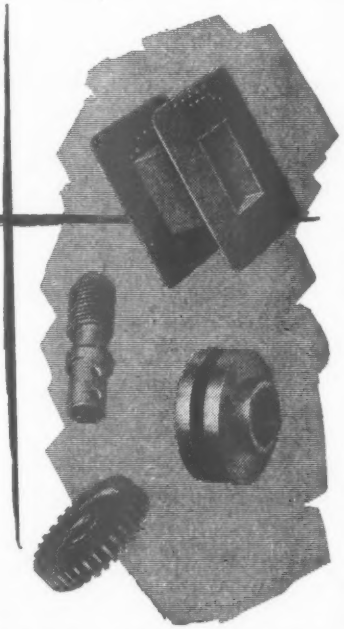

brings you
MATERIAL SOLUTIONS
to your
CURRENT PROBLEMS

... because the range of PIRTOID Paper and Fabric base laminates affords all the machining qualities needed with consistent uniform dielectric and mechanised strength. Read this booklet, sent gladly on request.

H. CLARKE & CO. (MANCHESTER) LTD
ATLAS WORKS, PATRICROFT, MANCHESTER
Tel. No. ECCLES 5301-2-3-4-5

dmCk4

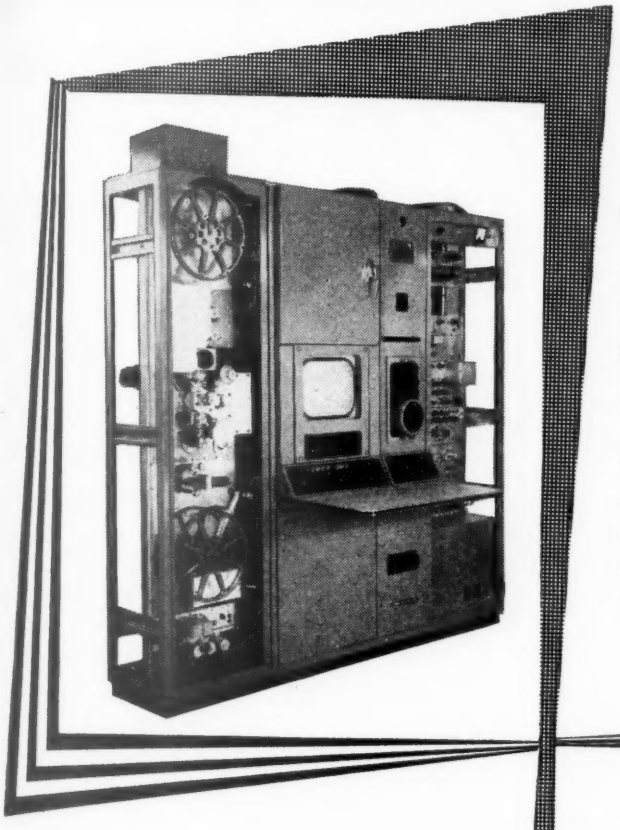

C.200 SERIES

The new 'Cintel' 16 mm Flying-spot Film Scanner now in production for leading television authorities throughout the world, employs a 'Cintel' high quality scanning tube.

This is just one from a wide range of tubes manufactured specifically for television applications and television is only one of the many fields catered for by 'Cintel' Tubes.

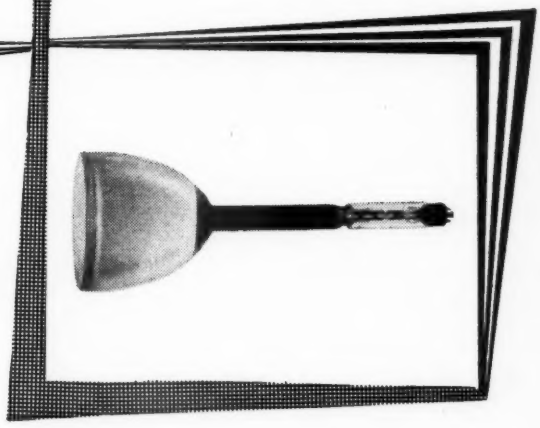

TELEVISION TUBES

✻ **over 200 tube types in the current catalogue. Full data on request.**

WORSLEY BRIDGE ROAD
LOWER SYDENHAM - LONDON SE26
A Company within the Rank Organisation Ltd. **HITHER GREEN 4600**

CINTEL

NEW

HIGH STABILITY CARBON AND WIRE WOUND RESISTORS

G. A. Stanley Palmer, Ltd., announce a completely new and comprehensive range of wire wound and high stability carbon resistors. These will prove invaluable to the manufacturer of high quality equipment and assist substantially in relieving his overall production costs.

HIGH STAB TO ±0.5% STABILITY AND TOLERANCE

WIRE WOUND TO ±0.02% TOLERANCE

Catalogue available on request.

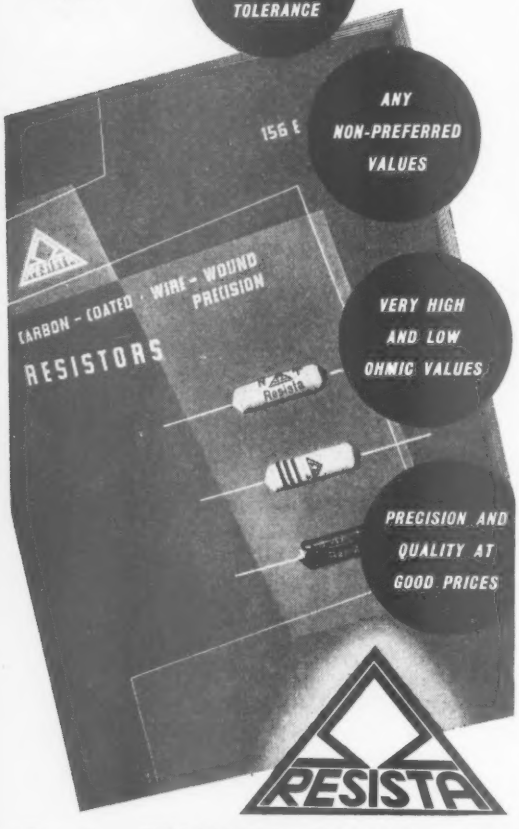
ANY NON-PREFERRED VALUES
CARBON - COATED · WIRE - WOUND PRECISION
RESISTORS
VERY HIGH AND LOW OHMIC VALUES
PRECISION AND QUALITY AT GOOD PRICES
RESISTA

G. A. STANLEY PALMER LTD

Maxwell House, Arundel Street, Strand, W.C.2. Phone Temple Bar 3721

DaG

LIVE WIRES AT WORK!

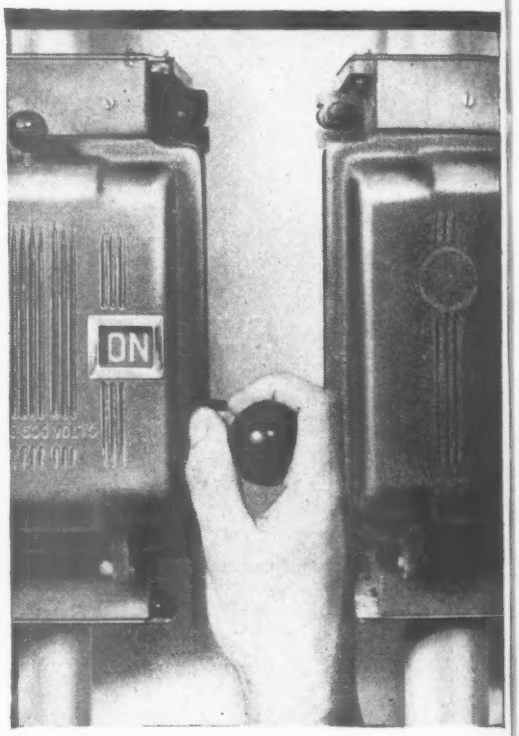

Found everywhere, performing essential tasks efficiently, Mersey Wiring Cables are always at home, whether in domestic or industrial service, exposed to harsh conditions or deep-embedded out of sight and sunlight.

A wide range of standard Wires, Cords and Flexibles is readily available.

Insulating and sheathing materials are Vulcanised Rubber, Polythene, and PVC. For really tough assignments Mervin (PVC) and 'Merthene' (Polythene and PVC) cables particularly resist acids, oils, alkalis and solvents, oxidising agents and direct sunlight.

Mersey practice is making first class cables. Try them and specify them.

Enquiries to your local Mersey Cable Depot will receive immediate attention. The address is in your Telephone Directory.

MERSEY CABLE WORKS LTD.

A TI COMPANY **LIVERPOOL 20**

MCW. 4

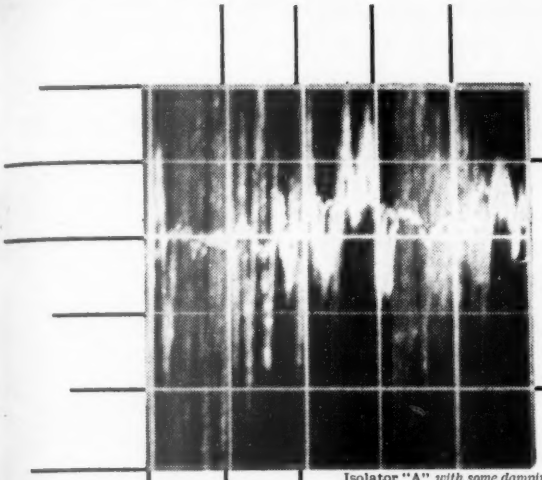

Isolator "A" *with some damping, but snubbing at resonance (15 c.p.s.). Metal to metal impact. Transmitted acceleration approx. 12 g. for sinusoidal input of ±0.026". Envelope contains transients as high as 10,000 c.p.s.*

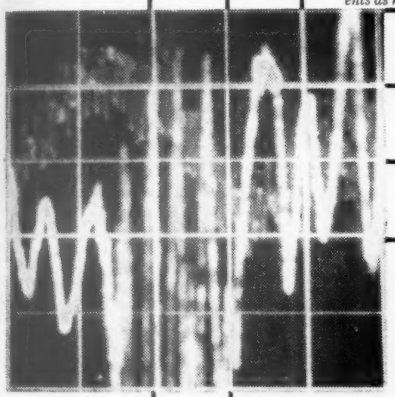

Isolator "B" *with little damping, but with rubber buffers to reduce shock at resonance (15 c.p.s.). High frequency transients reduced but transmitted acceleration still approx. 12 g. for same input.*

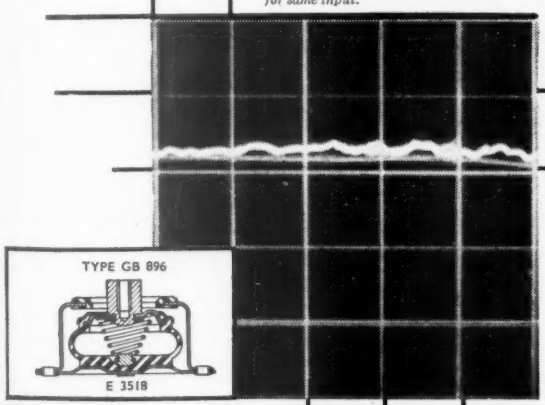

"BARRYMOUNT" Isolator. *Non-linear, air-damped. No snubbing at resonance (8 c.p.s.). Transmitted acceleration for slightly increased input (±0.030") is 0.62 g.*

Nett Gain <1?

Where airborne application of instrumentation is concerned, it is all too easy to find "progress" has resulted in the substitution of one element of chance, not necessarily human, for another and the nett gain can actually be well below unity.

The new enemy is vibration. The more complex and sensitive the equipment, the more potent is the enemy, and protection against vibration becomes part of the design problem. Attempts to achieve isolation have often magnified the problem, for it is obvious that if a major component of the offending vibration happens to be at the resonant frequency of the isolator employed, danger is increased by the isolator itself.

To keep the resonant frequency of the isolator low is not a complete answer. In fact there is, as yet, *no* complete answer. But by far the nearest approach is today provided by "BARRYMOUNT" Isolators, the principle of which is the complementary performance of non-linear springing *and air-damping*. Even at resonance "BARRYMOUNT" Isolators offer quite spectacular freedom from vibration, as the accompanying un-retouched oscillographs of transmitted acceleration show.

We shall be happy to tell you all you want to know about "BARRYMOUNT" Isolators. We shall be even happier to mount your "problem unit", in your presence, and give it "the works".

Your equipment rides safely on the

MADE IN ENGLAND UNDER LICENCE
BARRY B MOUNT
FROM BARRY CONTROLS INC. OF U.S.A.

"BARRYMOUNT" and "BARRY B MOUNT" are Registered Trade Marks
CEMENTATION (MUFFELITE) LTD. 20 ALBERT EMBANKMENT, LONDON, S.E. 11 TELEPHONE RELIANCE 6556

CITY SALE & EXCHANGE LTD

The High Fidelity Specialists

WHARFEDALE SFB/3 Speaker System

A wide range high quality speaker which can easily be accommodated in the average room. Size 34"x31"x12".

PRICED AT **£39-10-0** COMPLETE

We offer the following:—

Ferrograph 3/AN/H tape recorder for the highest possible quality of recordings at 7½ and 15in. per second. **86 gns.**

The famous Quad II amplifier and contro unit for the closest approach to the original sound priced at **£42** complete.

For a medium outlay we strongly recommend the R.D. Junior amplifier priced at **£17** which now has a 14 watts peak output. The associated control unit is the new Mark II with sufficiently high sensitivity to work with any pick-up including the variable reluctance type, price **£11.**

For your records we suggest a Garrard 301 transcription motor priced at **£26/8/3** in combination with either the Ortofon Type C pickup and transformer priced at **£27/10/6** or the Leak moving coil with diamond L.P. head and transformer priced at: **£13/16/5.**

Reports from customers on the fringe area of F.M. reception, have left no doubt that a Leak Troughline tuner has a really amazing performance. In spots where other tuners have only just been able to get a signal, the Leak has pulled in the station and held it without any difficulty. It is priced at **£35/10/-** and is self powered.

Part Exchange is our speciality. Easy Payments arranged. Free Delivery by our own van within a 20 mile radius. You can deal with us in confidence because we are HI/FI SPECIALISTS of long standing.

93-94 FLEET STREET, LONDON, E.C.4 *Phone: FLEet St. 9391/2*

HIVAC THE SCIENTIFIC VALVE

Perfection in *miniature*

DIRECTLY HEATED SUBMINIATURE VALVES

include the following types having exact American or British Services equivalents. They meet all the requirements of efficient portable A.F. or R.F. equipment.

Type	Description	Filament V	Filament mA	Anode Volts	Screen Volts	Grid Volts	Anode Curr. mA	Screen Curr. mA	Slope mA/V	Anode Imped.	Output mW	U.S.A. Equiv.	CV Equiv.
XFW40	A.F. Amp. Tetrode ...	0.625	10	22.5	22.5	0				1-2	35†		2260
XFY14	A.F O/P. Pentode ...	1.25	50	67.5	67.5	−6.5	3.1	0.95	0.65	0.02	65	5672	2238
XFY15	A.F. O/P Pentode ...	1.25	20	67.5	67.5	−6.5	3.1	0.95	0.65	0.02	65	5672	2238
XFY54	A.F. O/P. Tetrode ...	1.25	10	22.5	22.5	−2.0	0.34	0.08	0.28	0.03	2.75		
XFR1*	R.F. Amp. Pentode ...	1.25	100	45	45	0	3.0	0.9	2.0			1AD4	2237
XFR2*	R.F. Amp. Pentode ...	1.25	50	67.5	67.5	0	1.8	0.5	1.1			5678	2254
XFR3	R.F. Osc. Triode ...	1.25	120	135		−5.0	4.0		1.65			5676	2239
XR4	R.F. Power Amp. ...	1.25 2.5	125 62.5	125	125	−7.5	7.0	1.1	1.95			6397	
XFR5	R.F. Amp. Pentode ...	1.25	20	67.5	67.5	0	1.8	0.5	1.1			5678	2254

**Fully screened with metallised coating.* *†Voltage gain.*

Please write for further details.

Hivac Limited STONEFIELD WAY - SOUTH RUISLIP - MIDDLESEX
A member of the Automatic Telephone & Electric Group *Ruislip 3366*

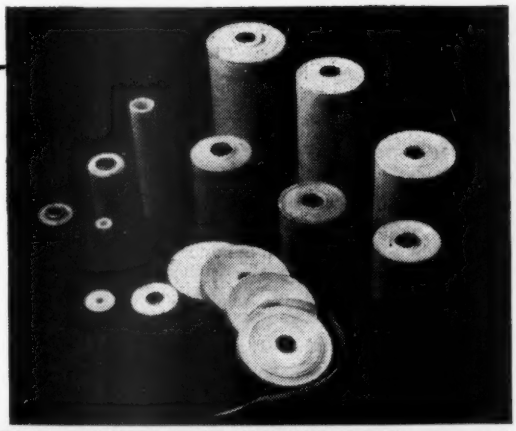

Radio
Radar
Television
Electronics
and

Polytetrafluoroethylene (PTFE)

THIS COMPANY began experimenting with PTFE when it was first introduced into this country. Shortly afterwards we started processing and fabricating the material in a special division of our own factory, giving our own designation of CF2 (derived from the formula) to the range of products ultimately produced.

Since that time, our experience, both of the behaviour of the material itself, during processing, and the application of its remarkable properties has been accumulating.

We have developed techniques, and we have designed special equipment with which to apply them, so that we now mould, fabricate, and otherwise fashion PTFE from its basic forms, i.e. rounds, discs, flat mouldings, rings, cylinders, rods, tubes, tape and cord, as illustrated, into innumerable components which are already widely used by the electrical and electronics industries. We also have considerable experience in the application of PTFE dispersion coatings to a wide variety of materials and surfaces.

It is obviously impossible for a material of this kind to attain its full usefulness to any industry without research and experimental work. We have set aside a substantial part of our resources for this purpose, and will willingly co-operate with any Company desiring to make use of the material, to the fullest extent of these resources. By arrangement we will make available facilities for practical development work to be carried on.

The following Information Bulletins are now available: No. 4, BASIC PROCESSING AND PROPERTIES, and No. 5, APPLICATIONS. *Both of these publications will be sent on request to interested engineers.*

Crane Packing LTD OF SLOUGH ENGLAND
A COMPANY

THE RD JUNIOR FM UNIT

Review Extracts . . .

". . . the construction and workmanship of this Rogers FM tuner is a delight to behold. The chassis is rigid and the wiring neat."

". . . the signal is held like a limpet over a few degrees of the dial then disappears and the inter-station noise increases until the next signal drops in and is held firmly, with no 'off-tune' positions of distortion."

"The discriminator is of the Foster-Seeley type and provides first-class audio quality."

". . . on switching on cold no drift is apparent, as the AFC takes over within plus or minus 500 kc/s of correct tuning point." (GRR Home Test No. 37 by Donald W. Aldous, M.Inst.E., M.B.K.S., G.R.R., March 1957.)

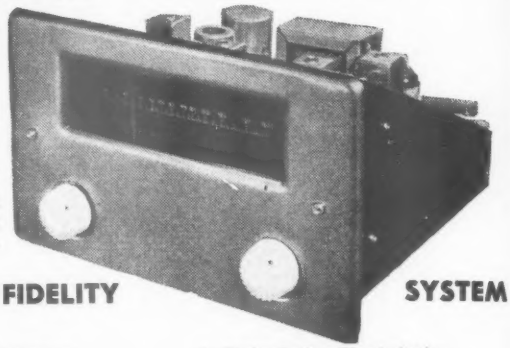

PART OF A COMPLETE HOME HIGH FIDELITY SYSTEM



★ Automatic Frequency Control
★ Variable Inductance Tuning
★ Built-in Filament Supply
★ Foster-Seeley Discriminator
★ Low Impedance Output
★ Grounded-grid RF Range

PRICE £24 . 17 . 0 INCLUSIVE

Available from leading High Fidelity dealers throughout the country. Immediate delivery.

A new Illustrated Leaflet giving concise details of the complete range of matched units forming the **RD JUNIOR Home High Fidelity System** may be had on request.

ROGERS DEVELOPMENTS (ELECTRONICS) LTD
"RODEVCO WORKS" 4-14, BARMESTON ROAD CATFORD LONDON, S.E.6
Telegrams: RODEVCO LONDON SE6 Telephone: HITher Green 7424

A new wide range DELAYED SQUARE PULSE GENERATOR

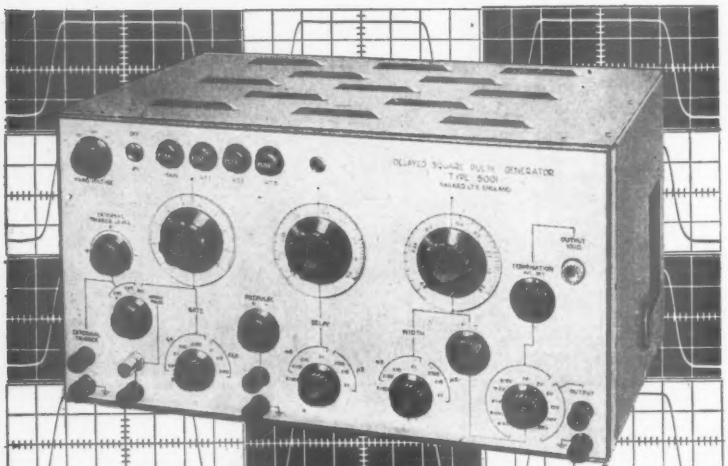

Model 5001 with accurate Time & Voltage Calibrations.

Rise time 10 mμsec independent of pulse width.

Square Wave Output 0·25 c/s to 2·5 Mc/s Waveforms show 0·2 μsec. pulse on 25 cm/μsec. sweep, 10 million to 1 range of pulse rate, width and delay calibrated by direct reading dials within 5%.

Internal Multivibrator of new type gives highly stable frequencies continuously variable from 0·1 c/s. to 1 Mc/s.

External Trigger from signals of any waveform and polarity at amplitudes down to 0·2 V and frequencies up to 2·5 M/cs.

Single Pulses at any range setting by push button.

Delay of Pre-Pulse to main pulse—jitter free and continuously variable from 0·2 μsec. to 2 secs; Pre-pulse output 20 volts positive or negative—0·2 μsec wide.

Main Pulse amplitude—20 mV to 50 V positive or negative.

★ **OUTPUT VOLTAGE CALIBRATED TO WITHIN ±2%**
Negligible overshoot on any range—no sag on long pulses. Width continuously variable from 0·2 μsec to 2 secs. ± 5%. The most accurate and versatile box of pulses yet made available to electronic engineers.

NAGARD LTD
OSCILLOSCOPES

NAGARD LIMITED
18 Avenue Road, Belmont, Surrey
Telephone VIGilant 9162/2

A low cost F.S.K. link

Plessey

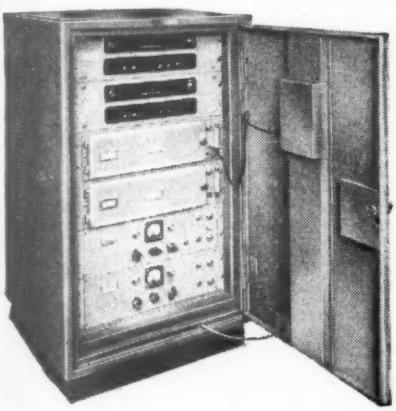

Type PVR. 120 Fixed Station Diversity Radio Teleprinter Receiving Terminal for H.F.

Designed in collaboration with International Aeradio Limited, the type PVR 102 Series Terminal has been introduced to provide an inexpensive radio teleprinter receiving equipment wherever some degree of manual control is acceptable. It is particularly suitable for regional point-to-point communications and meteorological broadcasts at Airports and for Press Agency and similar work.

Due to its low initial cost and its relatively simple installation, the terminal now offers radio teleprinter communications for use in circumstances where financial considerations have previously made them difficult to justify.

FEATURES

Built-in metering arrangements provide for checking, setting-up and monitoring of all important circuit functions.

Direct operation of up to three teleprinters; no keying relays are used, thus ensuring maximum reliability and freedom from radio interference. Five separate channels are pre-set and crystal controlled. Provision of crystal trimmers ensures that frequency is exact. Change of channel is effected by the operation of one knob.

Channel selector switch can be motor-driven from the rear, thus permitting remote control. A remote channel selection unit is available.

F.S.K. transmissions of differing shifts are catered for by the use of linear discriminator covering 200–850 CPS.

Rapid diversity switch action on small signal differential over wide range of inputs. Complete supression of weaker diversity signal.

A brochure setting out extensive technical data concerning the PVR 102 Series Terminal is available on request. Please ask for Plessey Publication No. 789/1.

ELECTRONIC AND EQUIPMENT GROUP

THE PLESSEY COMPANY LIMITED · ILFORD · ESSEX

Overseas Sales Organization: Plessey International Limited · Ilford · Essex · England · Tel: Ilford 3040

SI/a

THE WEYRAD AM/FM RECEIVER

THIS RECEIVER WHICH HAS BEEN SPECIALLY DEVELOPED FOR THE AMATEUR CONSTRUCTOR PROVIDES COMPLETE COVERAGE OF THE SOUND BROADCAST BANDS—LONG, MEDIUM AND SHORT WAVE AM. WITH 87.5-100 Mc/s. V.H.F. FOR FM. WE HAVE PRODUCED A FULLY ILLUSTRATED BOOKLET WHICH GIVES INFORMATION ON THE ASSEMBLY AND ALIGNMENT OF THE 4-BAND SEVEN-VALVE RECEIVER, INCLUDING CHASSIS LAYOUT, CIRCUITS AND POINT-TO-POINT WIRING DIAGRAM.

★ " WEYRAD " B.61 COIL PACK, P.23 I.F. TRANSFORMERS, T.S.61 TUNING SCALE, Q2 I.F. FILTER, E.822 MAINS TRANSFORMER AND E.823 OUTPUT TRANSFORMER.

★ ALUMINIUM CHASSIS WITH ALL PUNCHING AND BENDING COMPLETE.

★ DESIGNED FOR LATEST TYPE MULLARD VALVES.

★ RECEIVER OUTPUT CAN BE MODIFIED FOR USE AS A RADIO FEEDER FOR QUALITY AMPLIFIERS.

THE BOOKLET & PRICE LIST .....2/6d.

ILLUSTRATED FOLDER OF A.M. COMPONENTS..... 3d.

WEYMOUTH RADIO MANUFACTURING CO., LTD.

CRESCENT STREET, WEYMOUTH, DORSET.

Overcome by 'transport troubles'? Here's the answer..!

SORRY, TOMMY, I'M MUCH TOO TIRED..!
...ALWAYS SEEM TO HAVE A LOAD ON MY MIND...
SEND FOR A COPY OF THE ABC GOODS TRANSPORT GUIDE OLD MAN!
THINKS: THANK GOODNESS I TOOK OLD TED'S ADVICE...!
THAT EVENING

THE ABC GOODS TRANSPORT GUIDE

will tell you how to send ANYTHING—ANYWHERE!

The ABC GOODS GUIDE is an essential reference source for consignors in all industries. This new issue provides page after page of found-in-a-flash information about the nearest and quickest means of despatching *any* kind of goods.

ALL long distance road transport operators (independent and British Road Services) are listed in town alphabetical order in the Transport Services ABC Section, plus up-to-date details of warehousing, wharfingers, goods-by-air, ferry services, coastwise shipping and other specialized services.

★ **JAN.-JUNE issue ready NOW**

Half-yearly issues : Jan.—June, July—Dec., 1958 **5s each** POST FREE

ORDER FORM

Iliffe & Sons Ltd., Dorset House, Stamford St., S.E.1.

Please enter my order for..... copies of the Jan.—June 1958 and the July—Dec. 1958 issues of the ABC GOODS TRANSPORT GUIDE (at 10s. per set) for which I enclose remittance of .....

NAME .....

ADDRESS .....

.....

.....

W.W.

more and more users

are specifying WODEN TRANSFORMER CO. LTD

TRANSFORMERS



Left: Potted Compound Filled Transformers. A wide range of capacities for transformers and chokes. Complete reliability. Suitable for exacting industrial and climatic conditions.





Above: Cast Resin Transformers. Give complete mechanical and climatic protection for core and windings. Good heat dissipation.

Bottom Left: Shrouded and Open-Type Transformers. Combine first-class engineering with a popular highly competitive product. Vacuum impregnated and rigidly tested.

WODEN TRANSFORMER CO. LTD

Catalogues available on request.

WODEN TRANSFORMER CO. LTD

MOXLEY ROAD
BILSTON · STAFFS
Phone: BILSTON 41959

MW 2913

MUREX SINTERED PERMANENT MAGNETS are used in this new FATIGUE METER made by Mechanism Ltd.

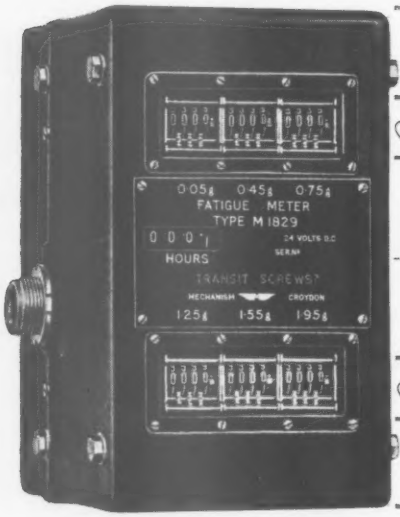

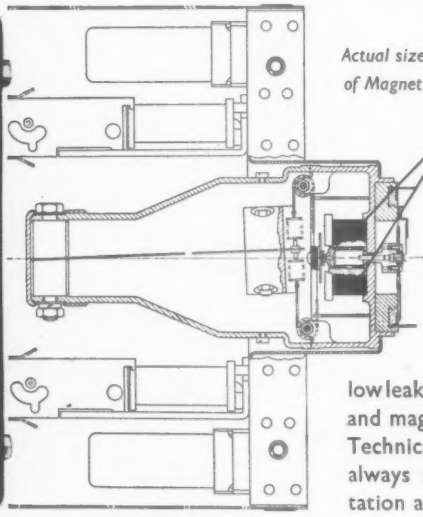

Actual size of Magnet



Murex 'Sincomax' magnets are used to meet the need for low leakage, high flux density, and magnetic stability. Technical representatives are always available for consultation and advice.

MUREX LIMITED *(Powder Metallurgy Division)* RAINHAM · ESSEX

Telephone : Rainham, Essex 3322. Telex 28632. Telegrams : Murex, Rainham-Dagenham Telex

LONDON SALES OFFICE: CENTRAL HOUSE, UPPER WOBURN PLACE, W.C.1. *Telephone: EUSton 8265*

AEC *for* MEASURING INSTRUMENTS

MOVING COIL • MOVING IRON • THERMO COUPLE • ELECTROSTATIC

IMMEDIATE DELIVERY

Most Basic Ranges available **ex-stock** for immediate despatch. Special ranges—delivery 7/14 days.

Round, Square or Rectangular patterns available, also full range of Industrial Switchboard Instruments. Portable and Laboratory Instruments.

We can supply Meters with Non-Standard Ranges in Current, Volts or Ohms. To B.S. 89. Industrial or Precision Grade accuracy.

We are now able to accept customers' own Meters for Scale Drawing and Lettering.

Clients are invited to inspect the display of instruments at our New Offices and Showrooms.

May we quote for your requirements ?

Baldwin 3½in. Round Flush Pattern (Common dimension by most manufacturers to K.113. Spec.)

Stockists of Meters by Baldwin, Weston, Turner, E.A.C., Weir and other leading manufacturers.

Manufacturers of Electronic Equipment to A.I.D. Standards

Contractors to G.P.O. and other Govt. Depts.

Anders Electronics LTD.

103, HAMPSTEAD RD., EUSTON, N.W.1. Tel. EUSton 1639

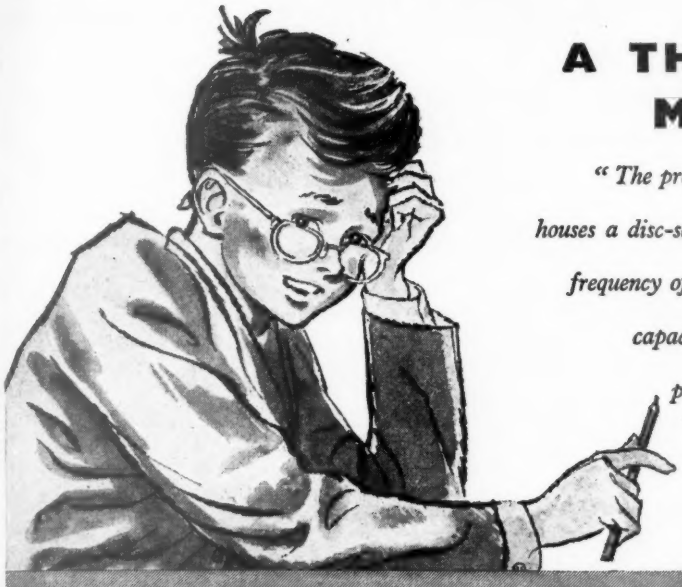

A THOUSAND MEGACYCLES!

"The probe unit used for a.c. measurements houses a disc-seal diode rectifier whose resonant frequency of 3,000 Mc/s, low inter-electrode capacitance and short transit time make possible a frequency range extending to no less than 1,000 Mc/s."

WHERE *does* our young friend get all his information about Marconi instruments? He certainly knows all about our new TF 1041A. He knows that, in addition to its unequalled performance in a.c. measurements, it measures balanced or unbalanced d.c. voltages and a wide range of resistance values. He knows that it has a large mirror-scale meter for fast, precise reading. He knows that there are three optional accessories for extending the a.c. and d.c. ranges and for making measurements on coaxial lines. In short, there's nothing about the TF 1041A that he *doesn't* know.

Infuriating, isn't he? Still, there's no reason why you shouldn't be just as well-informed. All the facts about this Marconi instrument are given in our leaflet G113. If you'd like a copy, you have only to ask. That's the way to get information about *any* Marconi instrument. Just ask.

THE *NEW* MARCONI VACUUM TUBE VOLTMETER Type TF 1041A

A.C. Measurement: Range: 0·05 to 300 volts, or to 2 kV using multiplier. Frequency Response: ±0·2 dB from 50 c/s to 450 Mc/s, —1 dB at 20 c/s, +2 dB at 1000 Mc/s. Input Impedance: 5 MΩ at 1 kc/s with 1·5 μμF in shunt.

D.C. Measurement: Range: 0·02 to 1000 volts, or to 30 kV using multiplier. Input Resistance: 40 MΩ balanced.

Resistance Measurement: Range: 0·2 ohm to 500 MΩ.

MARCONI INSTRUMENTS

AM & FM SIGNAL GENERATORS · AUDIO & VIDEO OSCILLATORS · FREQUENCY METERS · VOLTMETERS POWER METERS · DISTORTION METERS · FIELD STRENGTH METERS · TRANSMISSION MONITORS DEVIATION METERS · OSCILLOSCOPES, SPECTRUM & RESPONSE ANALYSERS · Q METERS & BRIDGES

MARCONI INSTRUMENTS LTD · ST. ALBANS · HERTFORDSHIRE · TELEPHONE: ST. ALBANS 56161

London and the South: Marconi House, Strand, London, W.C.2. Tel: COVent Garden 1234

Midlands: Marconi House, 24 The Parade, Leamington Spa. Tel: 1408 *North:* 30 Albion Street, Kingston-upon-Hull. Tel: Hull Central 16347

WORLD-WIDE REPRESENTATION

TC 113

"YOU CAN RELY ON US"

Stockists of all Radio and Electronic components for manufacturers, laboratories, Educational authorities, and the amateur.

THE NEW AVO MULTIMINOR

This first-quality pocket instrument available from stock.

DC. 2μA to 1 A in 5 ranges, 0-1,000v in 7 ranges.
AC. 0-1,000v in 5 ranges. Resis. 0-2meg in 2 ranges.
10,000 Ohms per volt.

Price **£9.10.0** Leather Case **32/6**
or 9 payments of **23/3**
or Deposit **63/4** and 6 payments of **22/2**

ALL OTHER AVO INSTRUMENTS IN STOCK

RADIO SERVICING COMPANY

82, SOUTH EALING ROAD, LONDON, W.5 *Telephone : EAL. 5737*

Next to South Ealing Tube (TURN LEFT) 9 to 6 p.m., Wednesday 1 o'clock.

AWA Teleradio* 5A

SIMPLE EFFICIENT

Made by AWA, Australia's largest manufacturer of telecommunications equipment of all types. AWA are approved contractors to the Crown Agents.
The 5A is in use by Governments and private networks in many places. Please write for details.

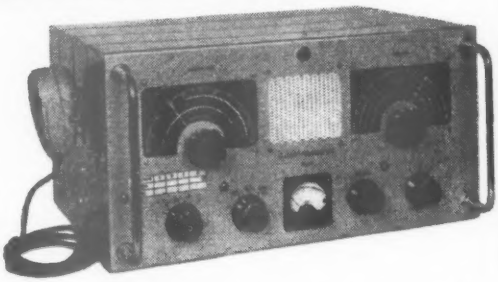



SPEECH COMMUNICATION

The AWA Teleradio 5A is a low-power H.F. transmitter-receiver for distances up to several hundred miles over land or sea.
One to four channels between 2 and 9 mc/s may be pre-tuned in the crystal-controlled transmitter. The receiver also tunes from 550 to 1540 kc/s.
The standard model operates from 12-volt battery.

* *Regd. Trade Mark 34699 (Aust.)*

AMALGAMATED WIRELESS (AUSTRALASIA) LIMITED

47 YORK STREET, SYDNEY, N.S.W. **99 ALDWYCH, LONDON**

ES11-56

A-MP* Taper Technique

TRADE MARK



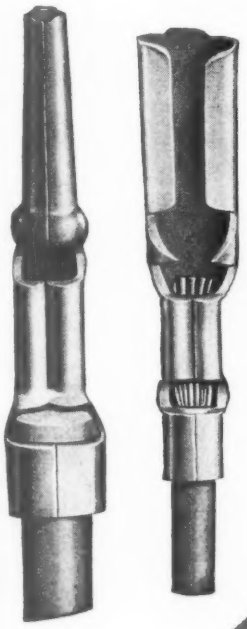

improves the product

cuts the cost

A-MP Taper Pins, Taper Bloks, Taper Tips, Taper Tabs, and Taper Tab Receptacles offer great flexibility in circuit design and ensure maximum electrical stability. They cut material cost, labour cost and assembly time. Taper Technique benefits manufacturers of business machines, aircraft, guided missiles and electronic equipment. Write or 'phone us for further information

IMPORTANT FEATURES

1. Taper pin diameter standard over a wide range of wire sizes.
2. Self-locking. Resists stress and vibration.
3. High contact pressure giving high conductivity and electrical stability.
4. Automatically crimped connections ensure uniformity.
5. Cuts assembly time. Cuts labour and material costs.

A-MP AIDS EXPORTS

The **A-MP** solderless method meets wire termination specifications in foreign countries. Use of the **A-MP** method will enable you to compete in world markets. It is particularly significant that **A-MP** systems are standard practice in the U.S.A.

A-MP SOLDERLESS TERMINATIONS—

THE CREATIVE APPROACH TO BETTER WIRING

A-MP* TRADE MARK

AIRCRAFT-MARINE PRODUCTS (GT. BRITAIN) LTD.

London Office: DEPT. 15, 60 KINGLY STREET, LONDON, W.1. Telephone REGENT 2517-8 and 3691-2-3

Works: SCOTTISH INDUSTRIAL ESTATES, PORT GLASGOW, SCOTLAND

* TRADE MARK OF AMP INCORPORATED U.S.A.

AP 323-47

We offer a complete Tape Recorder Service

Our comprehensive range of models include

Vortexion 2A	88 gns.
Vortexion 2B	£108.18.0
Brenell Mk. 4	53 gns.
Elon	62 gns.
Grundig TK5	53 gns. inc. mic.
Grundig TK8	72 gns. ex. mic.
Grundig TK830	100 gns. ex. mic.
Elizabethan Essex	65 gns.
Magnafon FR5	55 gns.
Magnafon 58	62 gns.
Philips AG 8109	39 gns.
Philips AG 8108	62 gns.

THE NEW GRUNDIG
TK 830/3D

Three-directional reproduction, full frequency range fidelity, microphone storage facilities, and the finest styling ever. Twin track with automatic switching and push button operation. Magic Eye recording level indicator.

Price 100 gns. (ex. microphone)

We are approved Grundig distributors and service agents.

Tapes
LP and Standard
E.M.I.
Scotch Boy
Ferrograph
Mastertape
Philips
B.A.S.F.

E.M.I. and BIB splicers
Jointing fluid and leader tape for editing in all colours
Wearite Defluxers

Send stamped, addressed envelope for our complete list of Tapes, Accessories and prices.

HI-FI EQUIPMENT

We stock all the leading makes of amplifiers, control units, transcription units, pickups, loudspeakers and FM Tuner units.

CONTINUOUS DEMONSTRATIONS

Modern Electrics Ltd

Telephones: Temple Bar 7587, Covent Garden 1703
Cables: Modcharex, London

164 CHARING CROSS ROAD, LONDON, W.C.2

PROMPT ATTENTION GIVEN TO POST ORDERS
EXPORT INQUIRIES INVITED AND WELCOMED

Connoisseur 3 SPEED MOTOR

The turntable with a 4% variation on all three speeds.

The Connoisseur motor is made for the perfectionist. It is one of the finest turntables in the world.

The speed change is arranged mechanically and gives a 4 per cent variation on all speeds. A synchronous motor, which is virtually vibrationless with low noise level and hum indication, maintains a constant speed at all settings. There is no braking action to obtain speed change.

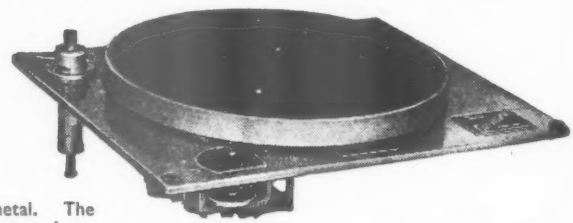

The 12in. turntable is lathe turned in non-ferrous metal. The main spindle, which is precision ground and lapped to mirror finish, runs in phosphor bronze bearings.

A sound, precision engineering job, the Connoisseur motor provides the foundation for perfect reproduction.

Price £20, plus P. Tax £8/11/-.

Matching Connoisseur Pick-up Mark II with a frequency range from 20-20,000 cycles:

Pick-up complete with 1 head fitted with Diamond armature £8/19/- plus P. Tax £3/16/6.

A. R. SUGDEN & CO. (ENGINEERS) LTD.

WELL GREEN LANE, BRIGHOUSE, YORKSHIRE. Phone: Brighouse 2397. Grams: Connoiseur, Brighouse.

OVERSEAS AGENTS:
SOUTH AFRICA: W. L. Proctor (Pty.) Ltd., 63, Strand Street, Cape Town. U.S.A.: Ercona Corporation, 551 Fifth Street, New York 17 N.Y. CANADA: The Astral Electric Co. Ltd., 44, Danforth Road Toronto 13, Ontario. NEW ZEALAND: Turnbull & Jones Ltd. Head Office: 12/14, Courtenay Place Wellington. HONG KONG: The Radio People Ltd., 31, Nathan Road Hong Kong.

MAIN DISTRIBUTORS:
AUSTRALIA: British Merchandising Pty. Ltd., 183, Pitt Street, Sydney and J. H. Magrath (Pty.) Ltd., 208, Little Lonsdale Street, Melbourne. EAST AFRICA: International Aeradio (East Africa) Ltd. P.O. Box 3133, Nairobi. MALAYA: Eastland Trading Co. 1, Prince Street, Singapore.

Long persistence for slow processes

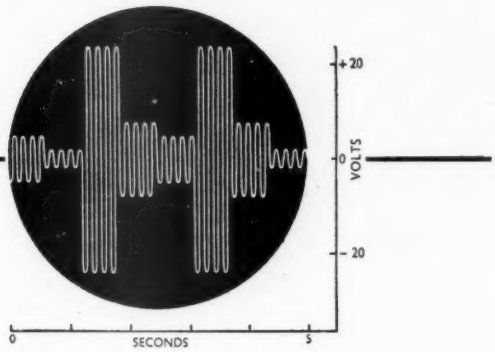

New industrial tube 3AFP7

Here is a new and inexpensive cathode ray tube produced specifically for industrial applications where a long persistence screen is required for observing slow or non-recurrent processes. This readily available 2¾-inch tube is invaluable for use with servo mechanisms and a wide variety of control apparatus.

It has a high sensitivity which simplifies deflection amplifier design and the circuitry associated with the tube itself is comparatively simple. Write for full details of the 3AFP7 to the address below.

ABRIDGED DATA

The 3AFP7 is suitable for symmetrical or asymmetrical operation.

Screen
Type P7—Blue flash, yellow afterglow.

Heater
Vh = 6.3V
Ih = 0.55A

Typical Operation

Va1 + a3	1000V
Va2 (for focus)	210 to 320V
Vg (for cut-off)	-28 to -65V
Sx	20V/cm.
Sy	11.5V/cm.

ETEL Cathode Ray Tubes

ELECTRONIC TUBES LIMITED · Kingsmead Works · High Wycombe · Bucks · Telephone: High Wycombe 2020

ETL5a

D

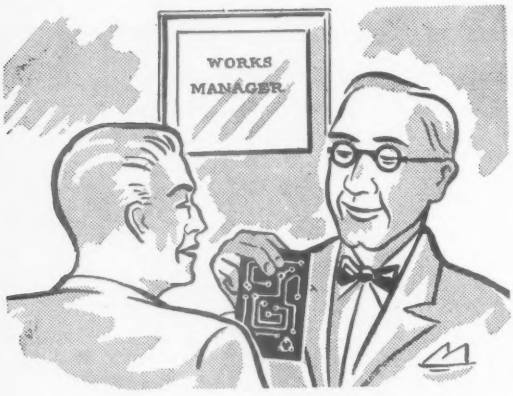

"So you think our equipment would be better if we used printed circuits?"

"Most definitely. For one thing, if we use them, no interference is possible with the layout of critical parts of the circuit and there are no wiring mistakes."

"That's fine—so a performance specification can be maintained without setting up test equipment, right?"

"Right. You'll find that we can build in a maximum stability, consistency and reliability over a length of time."

"But surely, a lot depends on the quality of the circuit—I mean the accuracy of the print?"

"Of course—that's why I've gone to P.C.D. They've been a great help, sent the prototypes in 48 hours. Their production follow up was pretty smart, too."

"H'm—P.C.D. I suppose that's their mark I can see on the circuit? Well, go ahead. Let's have P.C.D. in all our sets."

P C D

THIS MARK IS YOUR GUARANTEE OF QUALITY AND SERVICE

PCD LTD

(PRINTED CIRCUIT DEVELOPMENTS)

Incorporating Photo Printed Circuits Ltd.

MEMBER OF THE CAMP BIRD INDUSTRIES GROUP

GUILDFORD ROAD, BISLEY SURREY · TEL: BROOKWOOD 2203

Proof of a Tradition of Excellence...

FOR MANY PROSPECTIVE PURCHASERS of High Fidelity Loudspeakers the published specifications and measured performance data may have to suffice, since they are unlikely to have prior opportunity of hearing instruments coupled to their domestic equipment. Thus, the choice is reduced to a study of catalogues and consultations with other High Fidelity enthusiasts. A most telling factor in influencing the ultimate choice could be consideration of the reputation and the degree of success or otherwise attained by the manufacturer in the present extremely competitive High Fidelity Market.

Take the Home Market, where **GOODMANS High Fidelity Loudspeakers** are chosen more frequently than any others.

Next, consider the European Market for which **GOODMANS INDUSTRIES, LIMITED** are the leading and, by far, the largest manufacturers of High Fidelity Loudspeakers.

Finally, even in the entire world Markets a study of the published list of principal States and Territories to which **GOODMANS** export their High Fidelity Loudspeakers carries with it a conviction of their excellence. This world-wide reputation has been gained by **GOODMANS** in thirty-two years of constant research and development, with such careful attention to detail in all phases of design and production that *they lead the field, upholding a Tradition of Excellence, both acoustical and mechanical.*

Principal States & Territories to which GOODMANS Loudspeakers are exported:

Afghanistan
Algeria
Angola
Argentina
Australia
Austria
Belgium
Belgian Congo
Brazil
British Central Africa
Burma
Canada
Ceylon
Chile
Colombia
Cuba
Canary Islands
Cape Verde Isles
Denmark
Dominican Republic
Ecuador
Egypt
Ethiopia
Falkland Islands
Fiji
Finland
Formosa
France
French Equatorial Africa
Germany
Ghana
Guiana
Goa
Greece
Hong Kong
Hungary
Iceland
India
Indo-China
Indonesia
Iran
Iraq
Ireland
Israel
Italy
Jamaica
Japan
Kenya
Korea
Kuwait
Lebanon
Libya
Malaya & Singapore
Mexico
Morocco
Mozambique
Mauritius
Madagascar
Brit. Med. Islands
Netherlands
New Zealand
Nigeria
Norway
Pakistan
Panama
Paraguay
Persia
Persian Gulf
Peru
Philippines
Portugal
Sarawak
Saudi Arabia
Sierra Leone
Samoa
Union of South Africa
Spain
Sudan
Sweden
Switzerland
Syria
Thailand
Tunisia
Turkey
U.S.A.
Uruguay
Venezuela
Vietnam
West Indies
Yugoslavia

GOODMANS

GOODMANS INDUSTRIES, LIMITED,
AXIOM WORKS, WEMBLEY, MIDDX.
Telephone: WEM 1200. Cables: Goodaxiom, Wembley, Middx.
U.S. Agents:
Rockbar Corpn. Inc., 650 Halstead Avenue, Mamaroneck, N.Y.

MICROSECOND CHRONOMETER

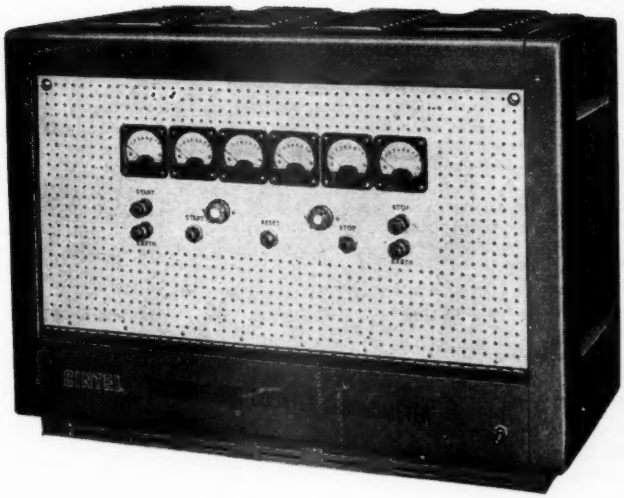

This equipment is designed to measure small intervals of time to a high order of accuracy and two ranges are provided:

(1) 1 μsec. to 1 sec. in steps of 1 μsec.

(2) 10 μsec. to 10 sec. in steps of 10 μsec.

Accuracy of each range is better than ± 0.005% ± the step interval.

Full details on this and other 'Cintel' Chronometers are available on request.

CINEMA TELEVISION LTD

A COMPANY WITHIN THE RANK ORGANISATION LIMITED

WORSLEY BRIDGE ROAD • LONDON • S.E.26
HITHER GREEN 4600

SALES AND SERVICING AGENTS:
Hawnt & Co Ltd., 59 Moor Street, Birmingham, 4
Atkins, Robertson & Whiteford Ltd., Industrial Estate, Thornliebank, Glasgow
McKellen Automation Ltd, 122 Seymour Grove, Old Trafford, Manchester, 16

A NEW CATALOGUE OF HIGH FIDELITY EQUIPMENT

has just been published by

NORTHERN RADIO SERVICES

11 Kings College Road, London, N.W.3. Phone: PRImrose 3314

Send two 3d. stamps for your copy now—it may well save you pounds.

- *Amplifiers, Tuners, Cabinets, etc., at Manufacturers' prices.*
- *Demonstrations: Monday-Saturday inclusive, 10 a.m.-6 p.m. without appointment. Technical Guidance Service by our Chief Engineer personally or by return post free. Let us have your enquiry now.*
- *Single items or complete installations from stock. We can supply any regular item advertised in this journal.*
- *Complete satisfaction or goods exchanged. Deferred terms available. Below we list just a few of our 1,001 lines.*

THE N.R.S. CONCERT GRAND REPRODUCER KIT comprising

No. 2 Symphony Amplifier *with Remote Control*	£19 19 0
Lenco GL50 Transcription Unit *with transcription quality pickup cartridge*	£21 17 6
F.M. Tuner	£15 15 0
Truvox Mark IV Tape Deck *with revolution counter*	£30 9 0
Truvox Tape Amplifier	£17 17 0
Concert Grand Cabinet *with pneumatic lid-stay*	£19 0 0
Lorenz Triple Cone Loudspeaker *with condenser*	£15 4 6
Symphony 12" Bass Reflex Cabinet *in matching veneer and contemporary style*	£11 10 0

All items available separately. Combination can be varied to suit individual requirements. Cabinet available in sapele mahogany, walnut or oak.

SYMPHONY 'CONTEMPORARY' REPRODUCER KIT comprising

No. 1 Symphony Amplifier *with Remote Control*	£14 14 0
Symphony F.M. Tuner and Power Pack	£18 15 6
Lenco GL50 gramophone unit *with transcription cartridge*	£21 17 6
Nordyk Tygram Cabinet *with legs*	£9 9 0

Switched F.M. Tuner can be substituted if preferred.

SYMPHONY DE LUXE TAPE RECORDER

Type A with built-in revolution counter in handsome figured walnut table cabinet.	25 gns
Type B as above but in Rexine covered Portable case	52 gns.
Recommended Microphone—Ronette	£3
No. 2 SYMPHONY AM/FM TUNER	26 gns.
SYMPHONY AM/FM RADIOGRAM CHASSIS	26 gns.

SPEAKERS *by Wharfedale, Goodmans, Whiteley (WB), Grampian, etc.*

TAPE EQUIPMENT *by Truvox, Collaro, Grundig, Wearite, Ferrograph, Brenell, TAPE—all makes stocked.*

STEREOPHONIC TAPE EQUIPMENT by **SPECTO** Stocked. Demonstration of stereo by appointment only. Everything else without appointment.

Concert Grand Cabinet showing layout of deck

CABINETS by **W. B. & Record Housing** (Nordyk) — full range stocked.

F.M. and **AM/FM TUNERS** and **TUNER KITS** by **Jason**—all models stocked.

GRUNDIG TAPE RECORDERS—all models available on interest-free Credit Sale Terms.

H.P. TERMS AVAILABLE

This Month's Special Bargains

CONSOLE EQUIPMENT CABINETS in figured walnut 33in. high x 18in. wide x 16in. deep, hinged lid, uncut motor board 16½in. x 14½in. Price **10 gns.**

BASS REFLEX CABINETS for 10in. speakers in figured walnut to match. Price **10 gns.**

GOODMANS MIDAX UNITS. Full length model. Price £8/10/- each.

GOODMANS 10in. SPEAKERS. Price 30/- each.

A great little condenser!

THE JACKSON "00" TWIN CONDENSER



Designed for use in miniature transistor receivers. The front (aerial) section is 208pf. to provide coverage for medium waves, and the rear section is 176pf. which may be padded to match the oscillator, very robust yet light weight. Front area 1⅛in. x 1$\frac{13}{32}$in. x 1$\frac{13}{32}$in. deep, price 9/6d.

It's reliable if it's made by Jackson's

JACKSON BROS. (London) LTD.

KINGSWAY · WADDON · SURREY Telephone **CROYDON 2754-5**

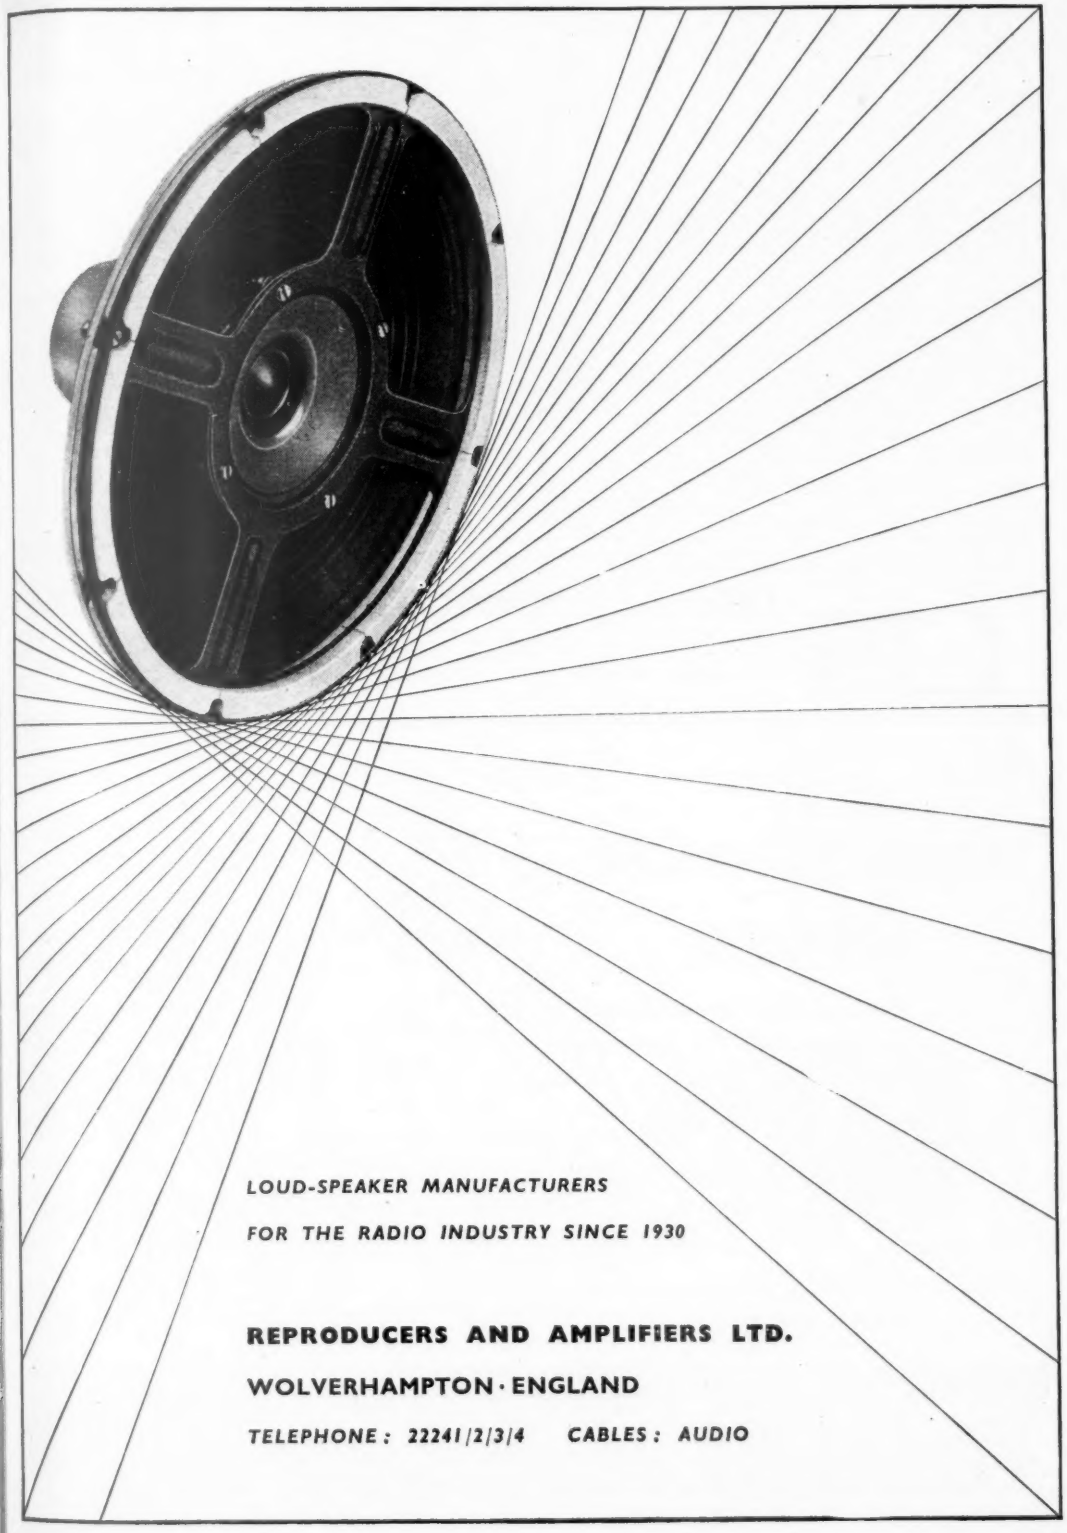
LOUD-SPEAKER MANUFACTURERS
FOR THE RADIO INDUSTRY SINCE 1930
REPRODUCERS AND AMPLIFIERS LTD.
WOLVERHAMPTON · ENGLAND
TELEPHONE: 22241/2/3/4 CABLES: AUDIO

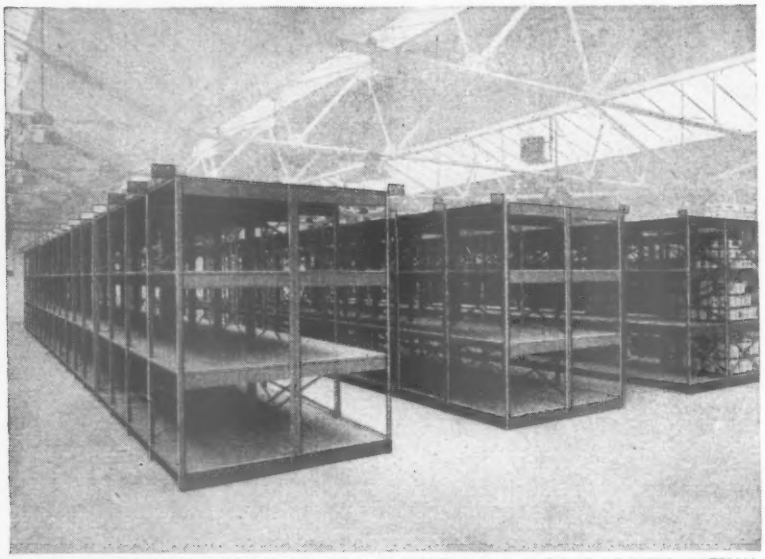

OTHER ABIX PRODUCTS: SINGLE & DOUBLE SKIN PARTITIONING, CLOTHES LOCKERS, MATERIAL RACKS, SLOTTED ANGLES (JUNIOR, UNIVERSAL, SENIOR) CAR & MOTOR CYCLE SHELTERS, TOOL LOCKERS & STEEL CYCLE STANDS.

ABIX

ADJUSTABLE STEEL SHELVING

The illustration shows a typical installation of ABIX Steel Shelving, supplied to a well-known Paint Manufacturer. Note the easy access to the Shelving and the orderly appearance.

ABIX Steel Storage Equipment is supplied in a number of Standard components which can be used to make up an infinite variety of assemblies to suit your particular need. These components can be erected and dismantled by unskilled labour in a minimum of time.

They are Steel throughout, Stove Enamelled Olive Green. All fixing bolts are sherardised.

Our Representative will be pleased to call and submit schemes and prices if required.

ABIX **(METAL INDUSTRIES) LIMITED**

Write for illustrated catalogue W/W.4

FACTORY EQUIPMENT SPECIALISTS

TAYBRIDGE HOUSE, TAYBRIDGE ROAD, BATTERSEA, LONDON, S.W.11

Phone BATtersea 8666/7 Grams: Abix, Batt, London.

ELECTRONIC MIXER

Spectone

The Living Truth in Sound



The Spectone Electronic Mixer enables several sources of sound to be recorded simultaneously with any tape recorder. Voice and musical effects may be combined, as well as other sources to make unique recordings. Two inputs; one for radio tuner or microphone and the second for a pick-up. The three gain controls are entirely independent of each other. The selector switch, which provides equalisation for L.P. and 78 records, also permits the use of two microphones, each separately controlled.

Two models are available :

MODEL 142 For use with HT & LT Current available. **17 Gns.**

MODEL 142A For use with AC Supply. **21 Gns.**

Write for descriptive Leaflet with full technical specifications

SPECTO LTD. Vale Rd Windsor

Standard Valves

FOR Communication AND Industry

the finest insurance against valve replacement costs

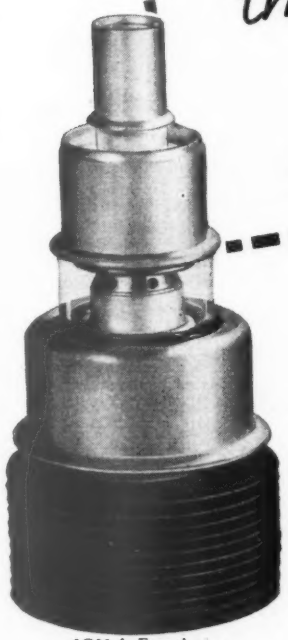

2C39A Forced air-cooled UHF Triode

RECTIFIERS & THYRATRONS

TRIODES, TETRODES & PENTODES
from 15mW to 150 kW anode dissipation for all frequencies from AF to SHF

GAS-FILLED STABILISERS AND TRIGGER TUBES

TRAVELLING WAVE TUBES

PULSE MODULATORS

VELOCITY MODULATED OSCILLATORS

VACUUM CAPACITORS

TRANSISTORS

Brochure and Technical Data available from:

Standard Telephones and Cables Limited

CONNAUGHT HOUSE · 63 ALDWYCH · LONDON W.C.2.

For proved performance

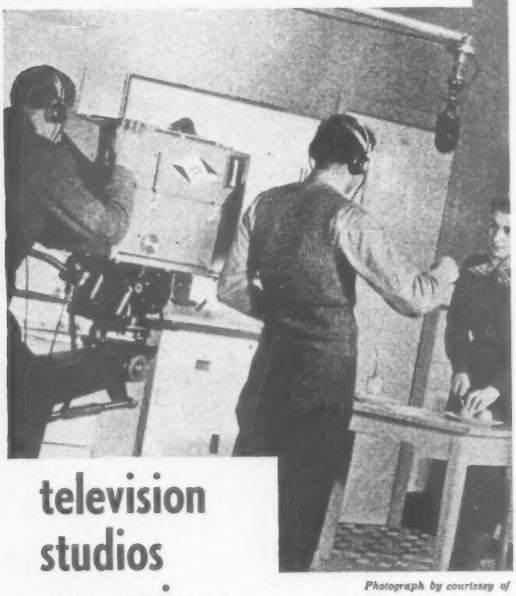

Photograph by courtesy of High Definition Films Ltd.

television studios are using*

S. G. BROWN Headphones

For essential studio control, television and broadcasting companies the world over choose reliable BROWN Headphones, famous for their quality of reception. ALL BROWN instruments are of tried and proved performance, capable of the maximum sensitivity and purity of tone.

*** Type F**

Particularly suited to the rigours of every day use—light yet strongly made. Shockproof and highly sensitive, this general purpose instrument will give lengthy and trouble free service.

Brown

Headphones of all types, 'Automatic Helmsman' Marine Compasses. Echo Sounders. 'Navigational Equipment.'

For full details of BROWN Headphones and other equipment, write to Telephone Dept.

S. G. BROWN LTD.

SHAKESPEARE STREET · WATFORD · HERTS

Telephone : Watford 7241

HI FIDELITY FM RECEPTION..

FM/Y4U
Head only - **£3.7.6d.**

FM/Y4L
4' 6" mast & lashings - **£4.17.6d.**

FM/Y4M
9' mast & lashings - **£7.2.6d.**

FM/Y4 LOFT
£2.17.6d.

demands a fine aerial

Audio engineers and other critical users will find their best answer is a Wolsey FM 4 Element Yagi. These are available in two types and have been carefully engineered to provide optimum signal/noise ratio, whilst maintaining the necessary bandwidth. The folded dipole and reflectors offer a unidirectional directivity pattern, providing high gain combined with mechanical rigidity that have made Wolsey Aerials famous.

PERFORMANCE FIGURES

Forward Gain 8 dBs - - - - Impedance 70 ohms
Bandwidth - - - - - - 10 mc/s at 3 dB points
Front to Back Ratio - - - - - - - - - 25 dBs
Acceptance Angle - - - - - - 90° at 3 dB points

WOLSEY ELECTRONICS LIMITED

CRAY AVENUE · ST. MARY CRAY
ORPINGTON · KENT
TELEPHONE: ORPINGTON 26661-6

(Electronics Division, Gas Purification & Chemical Co. Ltd.)

Industrial
Cathode ray tubes

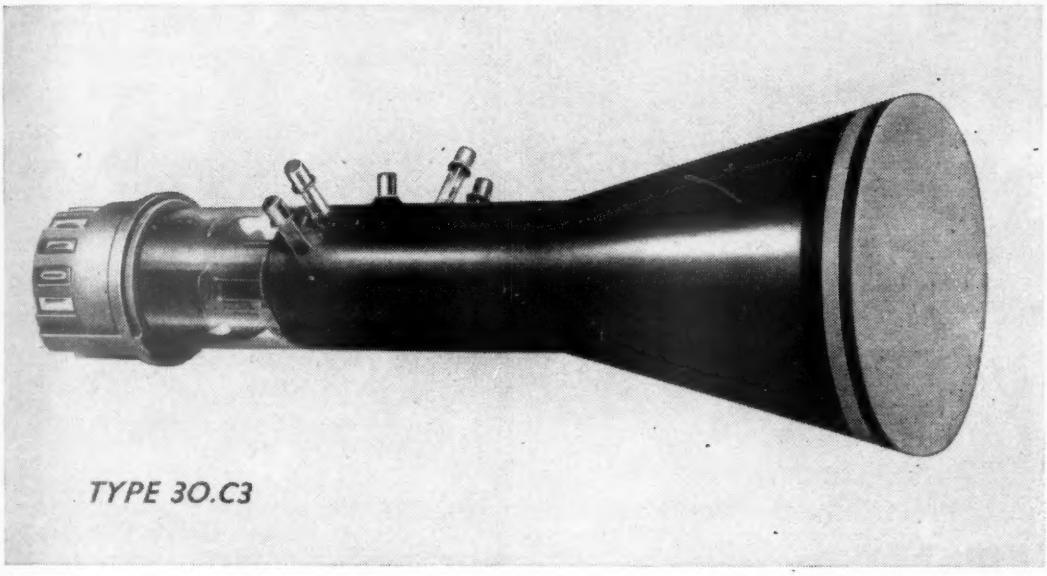

TYPE 30.C3

SIEMENS EDISON SWAN make a range of high grade electrostatic cathode ray tubes for use in instrumentation. Three sizes are available, each with a choice of screen phosphors to suit varying requirements.

30.B1 3½" diameter polished flat screen.
30.C2 5½" diameter polished flat screen.
30.C3 As 30.C2 but with all plates brought out at the side.
30.E6 12" diameter curved screen.

Each of the tubes listed can be supplied with the following screen phosphors.

T.1 Green. Medium persistence.
T.2 Blue-green. Medium-long persistence.
T.3 Blue actinic. Short persistence.
T.4 White 'television' type.
T.5 Blue. Very short persistence.

EDISWAN also have available 9" and 12" dia. Radar P.P.I. Tubes as well as a range of calibrated Compass Tubes.

EDISWAN

Send for further details to:
SIEMENS EDISON SWAN LIMITED (An A.E.I. Company) Industrial Valve Division

155 CHARING CROSS ROAD, LONDON W.C.2 · TELEPHONE: GERRARD 8660 · TELEGRAMS: SIESWAN WESTCENT LONDON

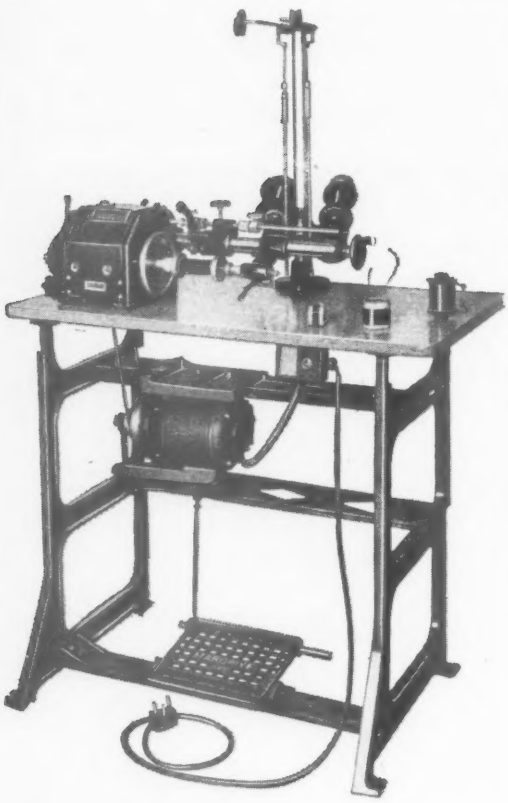

AUTOMATIC COIL WINDING MACHINE

Type A/1. (25-50 S.W.G.) *Type A/X (19-46 S.W.G.)*

COMPLETE WITH

★ Cast-iron stand and polished wood table top.

★ Dual reel carrier and tensioner.

★ ¼ h.p. integral clutch motor with foot control.

THE MOST OUTSTANDING MACHINE ON THE MARKET!

Dustproof construction—up to four coils can be would simultaneously—micrometer traverse setting—easily adjusted wire gauge setting—cadmium and chromium-plated steel parts—instantaneous re-set counter reads up to 100,000 turns—Wire Tensioning Stand holds two reels.

We will be pleased to send you an illustrated leaflet giving a full technical specification on request.

KOLECTRIC LTD
73 UXBRIDGE ROAD
EALING, LONDON, W.5
EALing 8322

M. R. SUPPLIES Ltd.

(Established 1935)

Among the many facets of this unique business we are famed for rapid delivery of SMALL GEARED MOTORS of the highest grade, with a remarkable selection from stock. Variable speed series wound and capacitor/induction constant speed models. Final speeds from 640 r.p.m. down to 1 r.p.m. and final torques up to 75 lb./in. Full details are given in our List GM/357—copy sent on request.

The Industrial world knows it is:

M. R. SUPPLIES, Ltd., for F. H. P. GEARED MOTORS.

HIGH SPEED MOTORS with blower impeller, 220/250 v. A.C./D.C. 10,000 r.p.m. Length 6in., dia. of flange mount 6¼in. These motors are also suitable for sanders, hedge trimmers, and other applications calling for high speed. Brand new, only **47/6** each (des. 3/6).

SHADED POLE INDUCTION MOTORS, 200/250 v. A.C. Very silent running and ideal for many lab. and domestic applications, stirrers, cooling fans, extractors, etc. No interference with radio/T.V. Deico super model, fan cooled, body 4½ by 3¼in., shaft proj. 1¼in. 1,425 r.p.m., torque 600 grm/cms., and the perfect unit for tape recorders in addition to above duties, **42/6** (des. 2/6). Also open type, small model, body 3 by 2½in., shaft proj. approx. ¼in. 2,700 r.p.m., torque 150 grm/cms. Also suitable for rim-drive gramo-motor, **18/6** (des. 2/-).

SYNCHRONOUS TIMER MOTORS. 200/250v. 40c. compact units 2½ × 1⅞ × 1¾in. with 1in. shaft proj. Self-starting, high torque, 6 r.p.m. Suitable also fo display turntables. **57/6** (des. 1/6).

EXTRACTOR FANS. Very well-made units much below normal price, 200/250v. A.C. induction motor, silent running, no interference. With mounting frame and back grille, ready for easy installation. With 8in. impeller, 12,000 c.ft./hr. **£5/5/-**. With 10in. impeller, 15,000 c.ft./hr. **£5/12/6** (des. either 3/6).

WIRE-WOUND POTENTIOMETERS (Colvern). Brand new dual, 5,000/5,000 ohms, 10-watts, 360 deg. rotation, ball-bearing, 3½in. dia. by 3in. deep. Remarkable bargain, **7/6** (des. 2/-).

SENSITIVE METERS (B.P.L.). At the moment we have a very useful range of Microammeters available for delivery from stock, 0/100, 0/500, 50-0-50 microamps, various sizes and others. Details on request.

OPERATION COUNTERS (mechanical—rotary motion) counting up to 999 forwards and backwards with re-set and flex. drive. One digit per rev. and can be used for testing motor speeds, **15/6** (des. 1/-)

COMPLETE SEWING MACHINE MOTOR OUTFITS. Definitely no better job at any price. We have large sales from recommendations. 220/250 v. A.C./D.C., fitted with latest radio/T.V. suppressors including motor with fixing bracket, foot control, needle light with switch, belt, etc. and instructions for fixing to ANY machine. And we still offer the complete outfit for **£8/15/-** (des. 2/9).

SELENIUM RECTIFIERS. Large range now available, including a bank of four for D.C. delivery up to 30 volts 36 amps. The bank **£7/17/6**. Let us have your rectifier enquiries.

AIR THERMOSTATS (Kieft). Adjustable range 30/90 deg. F. Differential only 2 deg. F. Capacity 15 amps. A.C. in smart ivorine housing 4½ × 2 × 2in. Easily installed—instructions with each. Ideal for greenhouse, rooms, labs., etc. **45/6** (des. 2/-).

SYNCHRONOUS TIME SWITCHES (Sangamo). 200/250 v. 50 c. In compact black plastic housing 4in. dia., by 3½in. deep, providing up to 3 on-off operations per 24 hours, with day-omitting device (use optional). Capacity 20 amps. A.C. **£5/8/6** (des. 2/-).

M. R. SUPPLIES, Ltd., 68, New Oxford Street, London, W.C.1
(Telephone MUSeum 2958)

MAGNETIC RELAYS

Built to your Specification

TYPES 3000 and 600
HIGH SPEED POLARISED and A.C.
to 400 VOLTS TROPICALISING—
IMPREGNATING

UNISELECTOR

SWITCHES

From 3 to 8 Bank—To Specification

KEY SWITCHES

Several types
in stock

GOVERNMENT CONTRACTORS
A.I.D. RELEASE

SPEEDY DELIVERIES

JACK DAVIS (RELAYS) LTD.
(Dept. "W") TUDOR PLACE, LONDON, W.1
MUSEUM 7960 LANGHAM 4821

a new valve for 470 Mc/s equipment

QQVO2-6

– unique double tetrode range extended

Here is a new six watt double tetrode for low cost 470Mc/s mobile equipment. This compact valve features a frame grid and the same unique twin construction as other Mullard double tetrodes—a construction which provides high efficiencies, high power gain and heater economy.

Other features of the QQVO2-6 include built-in neutralising capacitors which enable circuitry to be simplified, and low inter-electrode capacitances which allow wide tuning ranges to be achieved and which contribute to high efficiency.

Write to the address below for full details of the QQVO2-6 and other Mullard double tetrodes.

BASE B9A
CATHODE ... ... Indirectly heated
HEATER (Centre tapped)
Series 12.6V, 0.3A
Parallel 6.3V, 0.6A

CAPACITANCES

*ca–g′ (each section)	less than 0.16pF
cg′–all (each section)	6.4 pF
ca–all (each section)	1.6 pF
cout (two sections in push-pull)	0.95 pF
cin (two sections in push-pull)	3.8 pF

* Internally neutralised for push-pull operation.

CHARACTERISTICS
(each section) measured at Ia = 25mA, Va = Vg″ = 150V.

gm	10.5mA/V
μg′–g″	31

TYPICAL OPERATING CONDITIONS

	Telegraphy or F.M.	Telephony—A.M.	
f	470	470	Mc/s
Va	180	180	V
Vg2	180	180	V
Ia	2 x 27.5	2 x 20	mA
pa	2 x 2.1	2 x 1.5	W
Pout	5.8	4.2	W
Pload	4.5	3.4	W

THE MULLARD DOUBLE TETRODE RANGE
. . . . the most comprehensive and efficient in the world

	Typical F.M., Power Output
QQVO2–6	5.8 watts
QQVO3–10/6360 (CV2798)	11 watts
QQVO3–20A/6252 (CV2799)	25 watts
QQVO6–40A/5894 (CV2797)	56 watts

Mullard

Mullard
COMMUNICATIONS AND INDUSTRIAL VALVE DEPARTMENT

MULLARD LIMITED · MULLARD HOUSE
TORRINGTON PLACE · W.C.1 · Tel: LANgham 6633
MVT. 343a

...and now for mains voltages

The unique construction of the 'Precision' soldering iron enables A.N.T.E.X. to offer a really small well-balanced instrument for direct operation on mains supplies, in addition to the low voltage range of 6, 12, 24 and 28V. Models are available having a consumption of 8, 12 or 15 watts, and 5 bit sizes are produced, covering from $\frac{3}{32}$" to $\frac{3}{16}$" (heavy duty).

Mains transformers are available to suit the lower voltage irons.

Precision
SOLDERING IRON



- Complete weight less than one ounce.
- Fully insulated elements ensure complete protection.
- Non-slip handle with thermal airgap.
- Replaceable bits are heavily nickel-plated.
- Short shaft and correct balance give precise control.
- Highly flexible light-weight lead, easily replaceable.
- Complete safety provided by earth connection with rigorous testing.
- Replaceable elements sealed in shock absorber mounting for reliability.
- Clamp on lead removes all strain from connections.

A.N.T.E.X. LTD., 3 TOWER HILL, LONDON, E.C.3
Telephone ROYAL 4439. Cables ANTEXLIM, LONDON



The Reliance standard range of Potentiometers includes linear, log, semi-log, and non-inductive types, and depending upon characteristics, ratings up to 20 watts.

from the famous range of **RELIANCE**
POTENTIOMETERS

The Type MW miniature is a worthy addition to the world-famous Reliance range. It is essentially a "quality" unit for use in all electronic equipment where space considerations are vital—the illustration is actual size.

LINEAR LAW—5-50,000 ohms : 1 watt.
MAX. WORKING VOLTS—500 d.c.

Full technical details in Data Sheet No. 1.

RELIANCE MANUFACTURING CO. (Southwark) LTD.
Sutherland Road, Higham Hill, Walthamstow, E.17.
Phone : LARkswood 3245

TRANSFORMERS
for every requirement

Electronics
Transmitters
Radar
Test equipment
M.V. discharge tubes
R.F. heating
L.V. heating

Range 1 volt—35 K.V. *1 M/A—1,000 amps*
STANDARD OR TROPICAL FINISH

We are on Admiralty and Ministry of Supply lists and A.I.D. approved

Enquiries to :

STEWART TRANSFORMERS Ltd.
75 KILBURN LANE, LONDON, W.10 · LADbroke 2296/7



Preset Mk. 2 G type



Type E four gang variation

Preset Mk. 5 G type



MH2 Miniature panel and Spindle Sealed

Type E gang with Switch

Type EN to RCS 1000

Plessey

potentiometers

for special applications

Moulded track potentiometers by Plessey possess a high standard of stability within a wide range of operational temperatures and can be stored for extended periods without deterioration. They can be manufactured to conform, within strictly specified limits, to a designed pattern of values at various positions on the track.

COMMERCIAL TYPES

These are available as single units, dual concentrics or special gangs and are available with or without double pole switch, also in preset form. The standard resistance values are linear 100 ohms to 5 MΩ, log 5KΩ to 2 MΩ. The maximum working voltage is 500V.

Standard Type 'E'. 2 watts at 70°C for linear laws.

Standard with double pole switch Type 'ES'. 2 watts at 70°C for linear laws.

Dual Type 'ED'. 2 watts at 70°C for each section.

Dual with double pole switch Type 'EDS'. 2 watts at 70°C for each section.

Preset Type 'EP'. 1 watt at 70°C for linear laws.

GOVERNMENT AND INSTRUMENTATION TYPES

Available as normal and preset types. In general are in accordance with the appropriate Ministry Specifications. Panel and Spindle Sealed Type 'EH2' 1 watt at 100°C for linear laws. (Type Approval Certificate 906/4 [1230].) Maximum working voltage 500V.

Instrumentation Type 'EN' 2 watts at 70°C for linear laws. (All materials to R.C.S.1000.) Maximum working voltage 500V.

Miniature, thumb operated, with switch, Type 'F' ¼ watt at 70°C for linear laws. Maximum working voltage 250V. Sub-Miniature Preset Type 'G'. Marks 2 & 5. ¼ watt at 70°C for linear laws. (Type Approval Certificates 974/2 and 1075/1 [1373].) Maximum working voltage 250V.

Miniature Panel and Spindle Sealed Type 'MH2' ¼ watt at 70°C. (Type Approval Certificate 1032/1 [1373/1].) Maximum working voltage 250V. A fully sealed version of this potentiometer is also available.

Rating at 100°C is normally one half of that at 70°C.

● ● ● ● ● ● ● ● ● ● ● ● ● ● ●

SWINDON COMPONENTS DIVISION
THE PLESSEY COMPANY LIMITED

KEMBREY STREET · SWINDON · WILTS · Tel: 5461

Overseas Sales Organisation : Plessey International Limited
Ilford · Essex · England · Telephone: Ilford 3040

Bullers CERAMICS FOR INDUSTRY

High quality material and dimensional precision are attributes of Bullers die-pressed products.
Prompt delivery at competitive prices.





We specialise in the manufacture of—**PORCELAIN** for general insulation
REFRACTORIES for high-temperature insulation
FREQUELEX for high-frequency insulation
PERMALEX & TEMPLEX for capacitors



BULLERS LIMITED
MILTON · STOKE-ON-TRENT · STAFFS
Phone: Stoke-on-Trent 21381 (5 lines) · Telegrams & Cables: Bullers, Stoke-on-Trent
Ironworks: TIPTON, STAFFS Phone: Tipton 1691
London Office: 6 LAURENCE POUNTNEY HILL, E.C.4 Phone: MANsion House 9971



● *Illustrated above is a Type SJ Crystal Unit from a range covering 3-20 mcls and on the right is a Type SM Crystal Unit from a range covering 3-20 mcls.*

BROOKES *Crystals* **for DEPENDABLE frequency control**



All Brookes Crystals are made to Exacting standards and close tolerances. They are available w.th a variety of ba es and in a wide range of frequencies. There is a Brookes Crystal to suit your purpose—let us have your enqu.ry now.

BROOKES
Brookes Crystals Ltd
Suppliers to Ministry of Supply, Home Office, B.B.C., etc.
181/3 TRAFALGAR ROAD, LONDON, S.E.10
Phone: GREenwich 1828 *Grams:* Xtals Green, London

RELAYS

P.O. TYPES MANUFACTURED TO YOUR SPECIFICATION
PROMPT DELIVERY

3000 TYPES
COILS up to 80,000Ω.
CONTACTS up to 8 c/o's
Tropicalizing and impregnating to order.
600 and HIGH-SPEED TYPES also Supplied.



LARGE STOCKS OF KEYSWITCHES

THE KEYSWITCH CO.
ALL POST OFFICE EQUIPMENT
Enquiries to Sales Manager
126 KENSAL ROAD, LONDON, W.10
Telephone: LAD. 0666, 4640 *Grams:* "Fonequipt", London, W.10
Contractors to Home & Overseas Governments & H.M. Crown Agents

Everybody wants EMITAPE -you'll sell more this year!

EMITAPE "88" *General Purposes.*

EMITAPE "99" *Long play, giving 50% increased playing time.*

* 4 SPOOL SIZES

to fit all standard magnetic tape recorders

3" MESSAGE **5" JUNIOR**

5¾" CONTINENTAL **7" STANDARD**

* HIGHEST TECHNICAL STANDARDS

- High sensitivity
- Low noise level
- Low print-through factor
- Freedom from curl and stretch
- Anti-static
- Low head wear

* EMICASE

solves storage problems

protects spools from dust

allows easy identification of leader tapes

TYPE No.	TITLE	SIZE	LENGTH APPROX.	EMITAPE IN "EMICASE"	PRICE WITHOUT "EMICASE"
88/6E	"Junior"	5" dia.	600'	£1 . 3 . 6	£1 . 1 . 0
★99/9E	"	5" dia.	850'	£1 . 10 . 6	£1 . 8 . 0
88/9E	"Continental"	5¾" dia	850'	£1 . 10 . 6	£1 . 8 . 0
★99/12E	"	5¾" dia	1200'	£1 . 17 . 6	£1 . 15 . 0
88/12E	"Standard"	7" dia	1200'	£1 . 17 . 6	£1 . 15 . 0
★99/18E	"	7" dia	1800'	£2 . 12 . 6	£2 . 10 . 0

★ *LONG PLAY—50% increased playing time.*

EMITAPE *the magnetic recording tape with the world-wide reputation!*

E·M·I SALES & SERVICE LTD (*Recording Materials Division*) **HAYES · MIDDLESEX**

ES159

MASTERPIECE . . .

Enthralling eloquence and emotion, the hushed tension of the dramatic moment, the rapture of the last long note . . . Mastertape alone captures the true beauty of the human voice in speech and song.

Mastertape

MAGNETIC RECORDING TAPE BY

MSS RECORDING CO. LTD., Colnbrook, Bucks.

Telephone: Colnbrook 2431

Mastertape and MSS recording equipment are in regular use by many exponents and connoisseurs of fine music. Their preference proves that you too will find Mastertape a masterpiece !



CHAPMAN S5E/FM

This high quality De Luxe AM/FM Tuner is specially recommended to the discriminating listener. Combining superb FM quality with extreme AM sensitivity, good World Wide coverage is assured.

S5E/FM. Medium and 3 Short wavebands plus FM, with an RF stage on all AM bands and variable selectivity. Cathode Ray tuning indicator.
32½ gns. or 36½ gns. self-powered, including P.T.

S5/FM. As above, but Long, Medium and Short wavebands plus FM.

Full specifications available from

Your Hi-Fi Dealer or

C. T. CHAPMAN (Reproducers) LTD.

RILEY STREET, LONDON, S.W.10
Telephone: Flaxman 4577

EXECUTIVES REQUIRE CRISP, CONCISE REPORTS—DICTATE THOSE DETAILS IN YOUR CAR! VALRADIO DC/AC CONVERTERS MAKE DICTATING MACHINES AND TAPE RECORDERS MOBILE

For use too with Record Changers, Radiograms, Electric Gramophones, Television Receivers, and T.V. from country house lighting plants. (Prices according to instrument.)
INPUTS . ENTREES . ENTRADAS
6 12, 24, 32, 50, 110 or 200/250v.
OUTPUTS . SORTIES . SALIDAS
110 v. or 230 v. AC, 250 or 60 c/s, 30 to 300 w.

Prices DC/AC Converters:
From £3/18/—for Small Motors.
From £12/15/—for Radiograms (including 3-speed Types).

Units complete and ready for use. **VALRADIO.** *Write for descriptive folder, WW/C. ACCEPTED AS THE STANDARD by* **RADIO MANUFACTURERS, the Trade and the Aircraft industry.**

Les rapports destinés aux chefs de service doivent être rédigés d'une façon bien concise—dictez-les donc dans votre voiture!
Les convertisseurs C.C./C.A. "VALRADIO" consentent la mobilé aux machines à dicter et aux enregistreurs sur bandes.
Ils peuvent également être utilisés pour changeurs de disques, appareils combinés, électrophones, téléviseurs, etc., partant d'installations d'électricité, particuliéres.

Las relaciones destinadas a los jefes tienen que redactarse de modo muy conciso—dictenlas en el coche!
Los inversores C.C./C.A. "VALRADIO" les prestan movilidad a las màquinas de dictar y a los grabadores de cinta.
También pueden utilizarse para cambiadores de discos radio-combinados, gramófonos eléctricos aparatos de televisión, etc., aprovechando las instalaciones eléctricas privadas.

Specialists in converters since 1937. **VALRADIO LIMITED, BROWELLS LANE . FELTHAM . MIDDX. Phone: Feltham 4242/4837**

OVERSEAS ENQUIRIES TO:—DEMANDES D'OUTRE-MER A:—TODA INFORMACION DE EXPORTACION HA DE PELIRSE A:—E.M.I. SUPPLIES LTD. . HAYES . MIDDLESEX . ENGLAND

from the new Mullard catalogue

Transistor Tester
L364

The Mullard Transistor Tester has been developed to provide a rapid means of checking general characteristics and ascertaining if a transistor has been damaged in circuit. Facilities for measuring the important parameters, α^1, base-collector short-circuit current gain, as well as $I_{co}{}^1$ and the collector turnover voltage are provided. Although designed as a simple testing unit, it has an accuracy of ±5%.



Dual Trace Oscilloscope
L101/2

This high grade, general purpose instrument incorporates two identical amplifiers with sensitivities of 20mV/cm over a bandwidth of 4 Mc/s. Calibration accuracies are voltage ±5%, and time ±10% by null methods. The time base may be free running or triggered, and sweep speeds are from 0.1 μs/cm to 10 ms/cm.

Television Line Selector
L196

The L.196 enables any normally triggered oscilloscope to give a jitter-free display of one or more lines from a television video signal. It can be used on transmitter and receiver circuits to display depth of modulation, d.c. levels, bandwidth, blanking, synchronizing pulses and for the examination of similar waveforms in detail.

Regulated Voltage Unit
L153

This is a general purpose laboratory unit which provides a stable low impedance d.c. supply which can be continuously varied between 0 and 300V positive and negative at up to 300mA. Two 4 amp a.c. supplies at 6.3V tapped at 4V are also incorporated and an unregulated e.h.t. supply of 1.2kV at 2mA.

Mullard
Specialised Electronic Equipment

Mullard WRITE FOR FULL INFORMATION

MULLARD LIMITED · EQUIPMENT DIVISION · MULLARD HOUSE
TORRINGTON PLACE · W.C.1 · TELEPHONE: LANGHAM 6633

ME600

LEND ME YOVR EARS

Did Anthony know anything about music? At all events he liked the sound of his own voice. If we had half his gift for oratory, we could convince you that Dulci Hi-Fi equipment represents the soundest in sound values.

Here are some of our technically superb tuners and amplifiers brought to you at prices as realistic as the sound they reproduce.



MODEL H.4.T. A self powered AM/FM Tuner Chassis. Designed for high sensitivity and quality performance covering VHF Short, Medium and Long Wavebands. For use with high-fidelity Amplifiers. Magic Eye Tuning Indicator. Full A.G.C.
Price **£20 17 0** inc. tax.



FM(VHF) TUNER CHASSIS. Outstanding design and performance. Self-powered to work direct into any Amplifier or Radio. Magic Eye tuning indicator. 3-stage I.F. amplifier. Pre-set output level. Panel size 10½in.×5½in. (cut-out 9¼in.×5in.). Switching incorporated for connection to Pick-up Sockets, Amplifiers and Tape Recorders. 75 ohm Aerial input. Negligible radiation. Highly sensitive and designed for top quality reproduction. **Price £17 10 0 inc. tax.**

DPA 10 POWER AMPLIFIER. 10-14 watts. Ultra Linear with choice of control unit or pre-amplifier. A superb laboratory-designed amplifier modern styled and of precision quality for domestic use. Incorporates every facility for the reproduction of high quality sound from radio, records, tapes or microphone.
DPA 10 only **£12 12 0**
DPA 10 with control unit **£15 15 0**
DPA 10 with Pre-amplifier **£19 19 0**

MODEL H11. AM/FM TUNER. A combined and self-powered AM/FM Tuner, Control Unit and Audio Pre-Amplifier in one chassis, designed in detail for fine performance. Seven channel selector matching to L.P. and 78 r.p.m. Records and Tape Replay. FM (VHF)—Short—Medium and Long Waveband Independent Bass and Treble Controls giving 15db lift and cut with indicated response position.
Price £29 3 10 inc. tax.

DISTINCTLY **DULCI** QUALITY PRODUCTS

DULCI CO. LTD. 97-99 VILLIERS ROAD · LONDON N.W.2 **WILLESDEN 6678/9**

WE SPECIALISE IN SOUND RECORDING AND REPRODUCING EQUIPMENT

E.A.R. '1960' Portable

Inspect our most varied stock of all well-known makes—E.A.R., Goodmans, Quad, Leak, Rogers, Wharfedale, Sound, Grundig, W.B., etc., etc.,

SPECIAL OFFER THIS MONTH

The famous SOUND Tape Recorder for only 55/- deposit and 8 equal monthly payments of 137/6—delivery after first payment—NO INTEREST CHARGES.

CASH PRICE 55 GNS.

E.A.R. '1960' Chairside

If you cannot call—use our Mail Order Service—let us have your enquiries by return.

E & G **The Radio Centre**
33 Tottenham Court Rd., London, W.1
Tel.: MUSeum 6667

ELGE RADIO PEN

Versatile pocket Fault Finder

For
Radio
Television
Amplifiers
Transmitters
Electronic Equipment

Combined Neon-Tester and Saw-tooth Generator

Ideal for *on-the-spot* Voltage measurements; Signal tracing (A.F., I.F., R.F.); Valve and component checking; Polarity and mains indications; Spark plug testing.

An Invaluable Field-Service Aid

Price **24/-**
(Carriage paid)

MERCIA ENTERPRISES LIMITED
Godiva House, Allesley Old Road, Coventry
Telephone 2279

S.A.E. for illustrated leaflet. Trade Enquiries invited

DEPENDABLE RADIO SUPPLIES LTD.

12a TOTTENHAM STREET, LONDON, W.1. *(2 minutes Goodge Street Station. Opp. Heals in Tottenham Court Road)*
Phone: LANgham 7391/2. Hours of Business 9-6. Callers welcome. Terms: Cash with order or C.O.D.

BRAND NEW G 45 Govt. Fully modified AIRCRAFT CINE CAMERAS

24 v. operation
Ideal for laboratories



£6.10.0
Post Free in U.K.

2" short lens 3.5

16 exposures per second Spool carries 25ft. of 16 mm. film (1,000 exposures).

MINIATURE PLUGS AND SOCKETS
6 pin or 8 pin rear entry. 36/- doz. 3/3 each. P. & P. 1/6 doz Ex-units. See our Dec. issue for more detailed stocks.

SPECIAL OFFER
D.L.R. No. 5 **BALANCE ARMATURE INSETS.** Brand new. Price 3/6 each or 36/- per doz. P. & P. 1/- each 3/- doz. These can be put to many uses, i.e., microphones intercom., etc.

PHILIPS CONCENTRIC TRIMMERS
3.3 OPF. Price per doz. 6/6. Post & Packing 1/- per doz.

TONEON INDICATOR—NEON LAMPS
200/260 v. G.E.C. Worked in series with 300 k res. Price 2/6 each or 24/- per doz. Post & Packing 6d. each.

AMERICAN HIGH TO LOW MICROPHONE ADAPTORS. 3½ × 3½ × 1¾in., in polished steel case complete with six-pin miniature Jones plug and socket. Price 5/-. Post & Packing 1/6.

HEAVY DUTY SLIDING RESISTORS
Supplied in two types
250 watts to carry 25 amps. Resistance 0.4 ohms, worm drive, also 125 watts, 12 amps. Resistance 1 ohm slider. Suitable for charging board etc. Size 9 x 4 x 6in. high. Brand new. Price 12/6. Post & Packing 3/-.

DYNAMOTOR ROTARY TRANSFORMER



D.C. input 13.5 v. Output 285 v. at 75 mA. 57/6.
D.C input 27 v. Output 285 v at 75 mA. 37/6.
D.C. input 12 v. Output 250 v. at 50 mA. 47/6.
Postage & Packing on each 3/6

UNREPEATABLE OFFER LESS THAN HALF MANUFACTURER'S COST



Brand new single phase motor suitable for tape recorders, radiograms, workshops, etc., etc. Has many uses. Reversible 200-230 v. 5in. oz. torque. 1,400 r.p.m. Capacitor start. Weight 4½lb. Length overall 5in., spi dle both ends. ¾in. × ¼in., ¾in. × ¼in. Price, incl. P.P. and capacitor, 55/-.

BLOWER MOTOR
Overall height 4¼in, diam. 4in. Operation figures 27 v. at 7,000 r.p.m. 12 v. at 2,800 r.p m. 6 v. at 380 r.p.m. 17/6.

Complete with blower 22/6. P. & P. 2/6.

RELAYS
SIEMENS HIGH SPEED

250+250 coil 8/6
850+850 coil 10/6
1,000+1,000 coil 12/6
1,700+1,700 coil 17/6

LONDEX A.C. RELAYS
135Ω. .135 to .174 current 50-60 v. 3 make and 1 break. 12/6.
1,020Ω .056 to .072. Current 150-180 v. 1 make. 10/-.
9,200Ω. .021 to .027. Current 440-500 v. 1 changeover, 1 break. 15/-.

P.O. RELAY TYPE 3000
Anode trip changeover. Platinum contacts from 10Ω to 4,000Ω. 10/-.
Postage & packing on all relays 1/6.

LARGER PURCHASES
of all goods advertised enable us to offer
CHEAPER PRICES

QUOTATIONS GIVEN FOR LARGE QUANTITIES
EXPORT ENQUIRIES WELCOMED

HUNDREDS OF BARGAINS FOR CALLERS

DELCO ROTARY TRANSFORMERS
Made in U.S.A.



12 volts input. 265 v. output, 120 mA. 24 volts input. 540 v. output, 26 mA. 27/6. P. & P. 5/-.

AMERICAN MICA CONDENSERS

Description			Per doz.	Each
.001	350 v.	V.D.C Faradon	3/4	4d.
.01	1,000 v.	V.D.C. Cornell Dubilier	10/6	1/1
.001	1,200 v.	V.D.C. Faradon	10/6	1/1
.01	1,200 v.	V.D.C. Faradon	12/-	1/3
.0001	2,500 v.	V.D.C. Faradon	12/-	1/3

Post & packing 1/- per doz or 3d. each. Please enquire for sizes not stated as we have many in stock.

BARGAIN OFFER
6-8 volts, .25 amp., or 12-16 volts, .1 amp.
PILOT OR CAR BULBS (American) M.B.C. 4/6 doz. 25/- per 100.

FLASHLIGHT BULBS (American). 5 v. M.E.S 3/- doz.

BULLDOG CLIPS. Medium size. Nickel plated on brass will not corrode. Suitable flying leads, battery chargers, etc. 6d. each.

LOUD HAILERS
EX-GOV.



Impedance 7½Ω. Handling cap. 6 watts. Price 20/-, post 3/6.

BELLING & LEE FUSE HOLDERS. 1 hole fixing (ex-units), 1/-, 7 pin plugs 6d. P. & P. 6d.

LOUD HAILER SPEAKER UNIT
Impedance 7½Ω. 6-8 watts output. Wt. 10lb. Size 7½in. Depth, 10in Diam. Easy fixing. Weatherproof. Spun solid steel. Hammered finish.
PRICE £3/10/-
Carriage & Packing 7/6.



BOTH ITEMS IDEAL FOR SPORTS EVENTS, ELECTIONEERING AND SOCIAL FUNCTIONS.

COMPLETE P.A. SYSTEM
Canadian Telephone loudspeaking Amplifier Unit with 4 loud hailers, powered microphone, headphones and spares. Works off 12 v. D.C. New and boxed, ready for export.
WONDERFUL OPPORTUNITY—CANNOT BE REPEATED.
£7/10/- complete. U.K. Carriage free.
OR SPECIAL OFFER TO CLEAR THE LOT.

Complete Portable Vehicle Loud Hailer operates on 12 v. or 24 v. supply, output 6 watts. Can be fixed easily.

Comprising Power Pack, Loud Hailer, Hand Powered Microphone. Weatherproof. Very heavy metal case.

PRICE EACH £7/10/-
Carr. & Packing 10/-

BLOCK CONDENSERS

1 mfd. 600 v.	1/-
1 mfd. 1,000 v.	1/6
2 mfd 500 v.	1/6
2 mfd. 600 v.	2/-
4 mfd. 350 v.	2/6
10 mfd. 350 v.	3/6

P. & P. 9d.

ROTARY CONVERTERS Ex-Units



H.T.31
Input 11.5 v. Output 250 v. at 125 mA.
55/-

H.T.32
Input 11.5 v. Output 490 v. at 65 mA.
22/6

P. & P. 3/6 on each.

Both can be supplied tropicalised

We also have stocks of
BRAND NEW ROTARY TRANSFORMERS.

AS USED IN PYE MOBILE TRANSMITTERS AND RECEIVERS F.T.C. 102 AND P.T.C. 114. Also HUDSON'S MOBILE RADIO TRANSMITTERS AND RECEIVERS.

PLEASE ADD POSTAGE UNDER £1

at 189 YOU CAN DEPEND ON THE GOODS YOU BUY AND THE PEOPLE WHO SELL THEM TO YOU

AMPLIFIERS, TUNERS, KITS

Tele-Radio Williamson	£25 0 0
Tele-Radio Economy Pre-Amp	£6 16 6
Osram 912 (with pre-amp.)	£24 8 2
Jason F.M. parts come to	£5 5 0
Jason Fringe Area Model (*less valves*), parts come to	£6 0 0
Jason Switched Tuner (*with two valves in front end*), parts come to	£9 0 0
Jason Power Pack	£2 1 9

(Send S.A.E for Lists on above as required.)

COMPLETE EQUIPMENT

Leak TL.12 Plus	£18 18 0
Leak Varislope Mk. III	£15 15 0
Rogers Mk. III Control Unit	£12 0 0
Pilot HFA/12 Amplifier	£21 0 0
Pilot HFC/12 Pre-Amp	£16 16 0
Quad II Amplifier	£22 10 0
Quad Control Unit	£19 10 0
Rogers F.M. Tuner	£24 17 0
Leak F.M. Tuner	£35 10 0
Jason Prefect Switched F.M. Tuner	£15 12 9
Jason J.10 Amplifier	£22 10 0
T.S.L. F.M. Tuner	£17 10 0

SPEAKERS, PICK-UPS, MOTORS

NOW DEMONSTRATING
Goodmans 815 three-speaker system in cabinet.

Goodmans Axiom 150	£11 5 9
Goodmans Axiette	£6 18 6
Goodmans Midax	£11 16 0
Goodmans Trebax	£6 4 0
Wharfedale AP/10 Enclosure for 10in. speakers	£15 15 0
Wharfedale Golden 10/FSB	£8 14 11
Wharfedale SFB/3	£39 10 0
Tannoy Canterbury 12in. D.C.	£57 15 0
Tannoy 12in. Dual Concentric	£30 15 0
G.E.C. Metal Cone Speaker	£9 5 0
G.E.C. Presence Unit	£3 9 6
Simon Cabinet Speaker	£31 10 0
W.B.1012	£4 19 9
Westrex, complete	£169 0 0
Westrex Acoustilens	£69 17 0
Wescrex, kit and plans	£116 2 0
Full ranges by Wharfedale, Goodmans, etc.	
Leak Pick-Up, diamond head	£13 16 5
Garrard TPA/10 P.U. with Trans.	£15 9 4
Goldring 600 Cartridge	£11 13 6
Goldring 500 Cartridge	£3 9 6
Connoisseur with diamond head	£12 15 6
Collaro Trans. with PX head	£5 7 5
Collaro 4T/200 Trans. Motor	£14 18 0
Garrard 301	£26 8 3
Connoisseur	£28 11 0
B.J. Arm	£3 2 11

● VALVES ● COMPONENTS ● MATERIALS ● ACCESSORIES ● BOOKS ● RE-FITTED DEM. ROOM.

TEST EQUIPMENT

AVO Instruments including **AVO** Multi-Minor £9 10 0
Taylor Meters, Advance Signal Generators etc.

Nordyk Gram. Unit	£5 19 6
Nordyk Speaker Cabinet	£5 17 6
Tygram Cabinet	£9 9 0

TAPE

Tele-Radio Masterlink M.2 Record/Pre-amp. Unit, powered	£28 7 0
Ferrograph 3AN	£82 19 0
Ferrograph 3AN/H	£90 6 0
Wearite 3A Deck	£35 0 0
Wearite 3B Deck	£40 0 0
Vortexion 2A	£92 4 0
Brenell Recorder	£55 13 0
Brenell Deck Mk. IV	£23 2 0
Ditto with Rev. Counter	£24 12 0
Film Industries Ribbon Mic.	£8 15 0
Acos 39 Mic.	£5 5 0
Simon "Cadenza"	£10 10 0
Cadenza without case	£8 10 0
Lustraphone "Lustrette" Mic.	£3 7 6
Reslo RBL/T Mic.	£8 15 0
Wearite De-Fluxer	£2 10 0
Bib Splicer	18 6

Wearite Tape Recording Accessories.
Tapes by leading makers including Scotch Boy, E.M.I., Ferrotape, B.A.S.F., etc.

TELE-RADIO
(1943) LTD.
189, EDGWARE RD., LONDON, W.2
'Phone: PADdington 4455-6

SPECIALIST SERVICE IN QUALITY EQUIPMENT FOR OVER 14 YEARS
Large Stock • Same-day Mail Order Service • Personal Export

THE NEW MOTEK K9 TAPE DECK

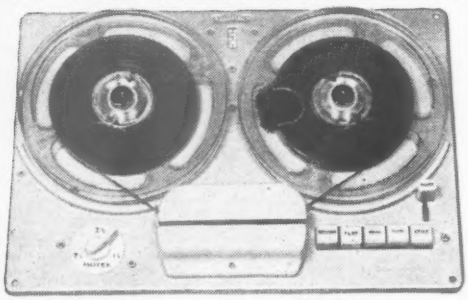

(Patents pending)

Outstanding features include:

- ★ 3 speeds at turn of knob (7½in. per sec., 3¾in. per sec. and 1⅞in. per sec.).
- ★ Built-in rev. counter for precise tape location.
- ★ Pause control.
- ★ Fully automatic push-button operation with spare contacts on Record and Play wafers to allow for possible amplifier wiring (8 two-way changeover switches).
- ★ High impedance, record and erase heads. (Simple azimuth adjustment.)
- ★ Three-motor drive.
- ★ Fast, forward and rewind functions without handling tape.
- ★ Low wow level.
- ★ British made throughout.

List Price 21 gns.

MODERN TECHNIQUES
WEDMORE STREET, LONDON, N.19
Telephone: ARChway 3114

DYNAMIC MINIATURE MICROPHONE LOUDSPEAKER
6—300Ω



Leaflets on Demand

TRIANON - ELECTRIC
95, COBBOLD ROAD,
LONDON, N.W.10
WIL 2116

*NEW! Tubular and Disc Ceramics

HIGH-Q TUBULAR

List No.	Capacitance	List Prices ±5%	±10%	±20%
	Type P100			
CT10Q/2	1.5 pF	—	—	1/0d
CT10Q/2	2.2 pF	—	1/1½d	1/0d
CT10Q/2	2.7 pF	—	1/1½d	1/0d
CT10Q/2	3.3 pF	—	1/1½d	1/0d
CT10Q/2	3.9 pF	—	1/1½d	1/0d
CT10Q/2	5.0 pF	1/1½d	1/0d	10½d
CT12Q/2	7.5 pF	1/1½d	1/0d	10½d
CT12Q/2	8.2 pF	1/1½d	1/0d	10½d
CT12Q/2	10.0 pF	1/1½d	1/0d	10½d
CT15Q/2	15.0 pF	1/1½d	1/0d	10½d
CT20Q/2	20.0 pF	1/1½d	1/0d	10½d
CT20Q/2	22.0 pF	1/1½d	1/0d	10½d
CT25Q/2	30.0 pF	1/1½d	1/0d	10½d
CT25Q 2	33.0 pF	1/1½d	1/0d	10½d
CT30Q/2	39.0 pF	1/1½d	1/0d	10½d
	Type N750			
CT10Q/2	10 pF	1/1½d	1/0d	10½d
CT10Q/2	15 pF	1/1½d	1/0d	10½d
CT10Q/2	20 pF	1/1½d	1/0d	10½d
CT10Q/2	22 pF	1/1½d	1/0d	10½d
CT10Q/2	24 pF	1/1½d	1/0d	10½d
CT10Q/2	30 pF	1/1½d	1/0d	10½d
CT10Q/2	36 pF	1/1½d	1/0d	10½d
CT10Q/2	39 pF	1/1½d	1/0d	10½d
CT10Q/2	47 pF	1/1½d	1/0d	10½d
CT10Q/2	51 pF	1/1½d	1/0d	10½d
CT10Q/2	68 pF	1/1½d	1/0d	10½d

List No.	Capacitance	List Prices ±5%	±10%	±20%
CT10Q/2	75 pF	1/1½d	1/0d	10½d
CT12Q/2	100 pF	1/1½d	1/0d	10½d
CT15Q/2	150 pF	1 4½d	1/3d	1/1½d
CT20Q/2	200 pF	1/9d	1/7½d	1/6d
CT20Q/2	240 pF	1/9d	1/7½d	1/6d
CT25Q/2	300 pF	1/9d	1/7½d	1/6d
CT25Q/2	330 pF	1/9d	1/7½d	1/6d
CT30Q/2	390 pF	1/9d	1/7½d	1/6d
CT35Q/2	510 pF	1/9d	1/7½d	1/6d

HIGH-K TUBULAR (Tolerance -20% +80%)

List No.	Capacitance	List Price
CT10K/2	470 pF	10½d
CT10K/2	680 pF	10½d
CT10K/2	1,000 pF	10½d
CT10K/2	1,500 pF	10½d
CT10K/2	2,200 pF	10½d
CT15K/2	3,300 pF	1/0d
CT18K/2	4,700 pF	1/0d
CT20K/2	5,000 pF	1/0d

HIGH-K DISC (Tolerance -20% +80%)

CD 8K/2	470 pF	10½d
CD 8K/2	680 pF	10½d
CD 9K/2	1,000 pF	10½d
CD 9K/2	1,500 pF	10½d
CD11K/2	2,200 pF	10½d
CD12K/2	3,300 pF	10½d
CD14K/2	4,700 pF	10½d

✳ Hunts announce their new ranges of Tubular and Disc Ceramics. Precise in their characteristics and robust in design, these capacitors are available in High-K and High-Q Tubulars and in High-K Discs. Working Voltage 500 v D.C. or 300 v A.C. Minimum quantity 6 of any one capacitance.

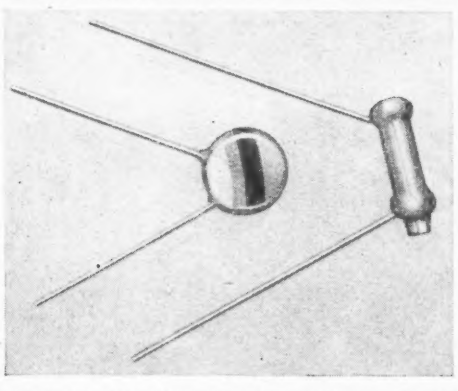

REGISTERED TRADE HUNTS MARK CAPACITORS

A. H. HUNT (Capacitors) LTD.
WANDSWORTH, LONDON, S.W.18 BAT 1083-7
Factories also in Surrey and North Wales

THE DCR 12 MINOR

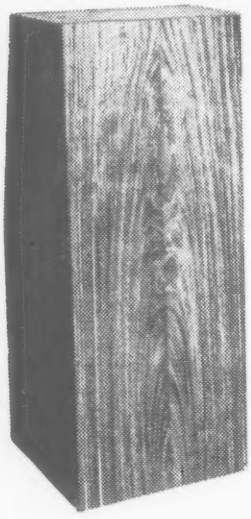

Smallest of the Corner Reflector range of speakers the D.C.R. 12 Minor is by no means the least important. It is, in fact, the "best seller".
It shares to the fullest extent the advantages inherent in the corner reflector arrangement and has also that perfect "cleanness" which distinguishes the Davey cabinets. It is an excellent housing for any good 12" speaker, and will produce a remarkable extension of range used with a 10" or 8" speaker. Dimensions: 36" × 16" × 16". Veneered and finished to customer's choice.

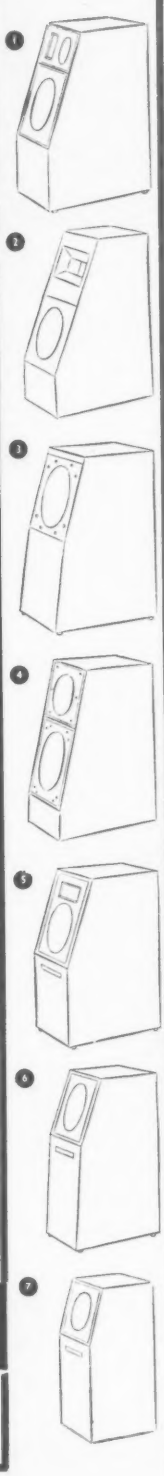

1. D.C.R. 15.8.T. 2. D.C.R. 15.P.M.T. 3. D.C.R. 15.D. 4.D.C.R. 12.8. 5.D.C.R. 12.T. 6. D.C.R. 12.D. 7. D.C.R. 12 Minor.

E · M · G

HANDMADE GRAMOPHONES LTD.
6 Newman Street, W.1.
MUSeum 9971.

sound technique

Come to SMITH'S for all the books that you need to increase your technical knowledge and keep up with the latest radio developments.
Volumes not in stock can be obtained for you, and we shall be pleased to supply a list of standard works on any subject.

Our local branch can also supply your business and personal stationery.

W. H. SMITH & SON

HEAD OFFICE : STRAND HOUSE, LONDON, W.C.2

BRANCHES THROUGHOUT ENGLAND AND WALES

All good 'labs' use Radiospares

quality components for design development and prototype work

Service Engineers!

Remember- Radiospares components are delivered absolutely "by return"

INTRODUCING THE SONOTONE 2T



All the recorded sound — that's the way the 'Sonotone' 2T equipped radiogramophone will play it! The revolutionary Sonotone pick-up head — a superior, highly sensitive product — represents another step forward in modern sound head technique by T.C.L. It is completely humidity and temperature proof, produces no magnetic hum and has a great many other technical advantages which are discussed fully in T.C.L. publication No. 1106. Design Engineers are invited to ask for a copy and for any further technical information they may require.

TCL

Technical Ceramics Limited, Wood Burcote Way, Towcester, Northants
Telephone Towcester 312

TCL.1

B-110

a world-famous crystal microphone by **Ronette**

RONETTE'S B-110
crystal microphone is very popular among transmitting amateurs all over the world. Internally screened against stray h.f. fields. Supplied with standard cable connector.

Can be mounted on all 5/8" - 27 threaded microphone stands

Effective output: 1.1 mV/μBar at 1000 c/s.
Load resistance: 5 MΩ
Frequency range: 30-13000 c/s.
Outp. impedance: equal to 2200 μμF

FAMOUS MICROPHONES

TRIANON-ELECTRIC LTD.
95, COBBOLD ROAD, LONDON, N.W.10
Willesden 2116

EDDYSTONE COMMUNICATION RECEIVERS

Model 840A illustrated
Cash Prices and Statutory Terms

Model	Cash Price	Deposit	8 Monthly Payments of
820	£31 18 0	£3 14 6	£3 14 6
870	£34 16 0	£4 1 6	£4 1 6
840A	£55 0 0	£6 8 4	£6 8 4
750	£78 0 0	£9 2 0	£9 2 0
888	£110 0 0	£12 16 8	£12 16 8
680X	£120 0 0	£14 0 0	£14 0 0

Cash price if paid in 6 months by Bankers' order.
Carriage paid per passenger train.

Model 840A is for A.C. or D.C. 110/250 v.; 750 and 680X 110/240 v. A.C. These sets are the choice of the discerning professional and amateur users. Descriptive literature gladly forwarded.
Latest EDDYSTONE Component Catalogue 1/-.

HP RADIO SERVICES LTD.
The Eddystone Specialists

55 COUNTY ROAD, LIVERPOOL, 4
Telephone: AINTREE 1445 ESTAB. 1935
CALL US ON TELEX. 62-244.

The Manning-Carr P.53C MINIATURE POLARISED RELAY



Actual Size

In dust-proof heavy gauge anodised aluminium can mounted on B9A base for plugging in.
(P53 original open non-plugging version still available.)
P53C BIASSED TO EITHER SIDE
P57 C/CS CENTRE STABLE
ALL TYPES FITTED WITH PLATINUM CONTACTS WHERE SPECIFIED

Data—A Sensitivity of 25 milli-watts and capable of handling mains voltage on the contacts with alternating currents up to 0.25 amps. Being polarised they have the advantage that the armature contact on P53 and P53C models can be biassed to lock in either direction by suitable adjustment of the contact screws which provides a useful facility where pulse operation is required. Speed of operation is high and the Relay will follow frequencies appreciably higher than 50 c.p.s. Resistance up to 7,000 ohms which is acceptable for Anode circuits. Alternatives to specification if required. **Sole Concessionnaires.**

POST OFFICE TYPES
3,000 & 600 RELAYS TO SPECIFICATION
Tropicalising, impregnating and Services jungle finish if required. Delivery 3-4 weeks.

Manufacturers to H.M. Govt. Depts. and leading Contractors
L. E. SIMMONDS LTD.
5 BYRON ROAD, HARROW, MIDDX.
Tel—Harrow 7797/9 Grams—SIMRELAY HARROW.

HI-FI - TV - T.R. SPECIALISTS

50 GOOD Reasons to USE "THE CLASSIC SERVICE"

Every item which we list below is a normal stock item which we are prepared to pack and despatch to you in any part of the world. Each item is chosen because we believe it to be a "Quality" product and unless it measures up to our standards we do not stock it.

In Gt. Britain and N. Ireland full hire purchase and credit sale terms are available with our confidential system and prompt despatch. Credit sale agreements must be cleared in nine months—all articles advertised can be purchased on 6 months credit—no extra charge.

	Item No.	Make	Model No.	Delivery	Cash Price	Terms C.S. Deposit	Terms C.S. Payments	Terms H.P. Deposit	Terms H.P. Payments	Export Price
SECTION I	**GRAMOPHONE MOTORS.**		ALL MAKES IN STOCK		£ s. d.	£ s. d.		£ s. d.		£ s. d.
		Garrard	R.C.88	Ex/stock	17 18 8	2 18 8	9 of 39/–	9 0 0	12 of 14/9	12 18 0
		Garrard	R.C.98	Ex/stock	19 17 8	2 4 0	9 of 44/–	10 0 0	12 of 20/–	14 6 0
SECTION II	**PICK-UPS**									
		Leak	Mark II	Ex/stock	13 16 5	2 16 5	9 of 29/–	7 0 0	12 of 14/8	10 5 0
		Connoisseur	Mark II	Ex/stock	12 9 10	2 9 10	9 of 27/–	6 5 5	12 of 11/8	8 11 0
		Ortofon	Type "A"	Ex/stock	17 18 1	2 18 1	9 of 28/–	8 19 6	12 of 10/1	13 0 0
SECTION III	**TUNER UNITS**									
		Leak	Mark II FM	Ex/stock	35 10 0	3 17 9	9 of 77/4	17 15 4	12 of 33/3	25 0 0
		Quad	Mark II FM	6-12 weeks	30 9 0	3 7 4	9 of 66/10	15 5 1	12 of 28/6	21 0 0
		Rogers	FM Unit	Ex/stock	24 17 0	2 14 8	9 of 54/8	12 9 2	12 of 23/3	18 0 0
		Armstrong	FM 61	Ex/stock	22 1 0	2 8 6	9 of 48/6	11 0 6	12 of 20/8	17 10 0
SECTION IV	**AMPLIFIERS**									
		Armstrong	A10	Ex/stock	32 10 0	3 11 6	9 of 71/6	16 5 8	12 of 30/5	32 10 0
		Rogers	Junior	Ex/stock	26 0 0	2 17 2	9 of 57/2	13 0 6	12 of 24/4	26 0 0
		Leak	TL.12A	Ex/stock	32 11 0	3 11 7	9 of 71/7	16 5 8	12 of 30/6	32 11 0
		Leak	TL.25A	Ex/stock	43 2 0	4 14 9	9 of 94/9	21 11 9	12 of 40/4	43 2 0
SECTION V	**LOUDSPEAKER UNITS**									
		Wharfedale	Super 3	Ex/stock	6 19 6	—	—	—	—	5 0 0
		Wharfedale	Super 8	Ex/stock	6 19 6	—	—	—	—	5 0 0
		Wharfedale	Super 12/CS/AL	Ex/stock	17 10 0	1 18 6	9 of 38/6	8 15 11	12 of 16/4	17 10 0
		Wharfedale	W.15 ES	Ex/stock	17 10 0	1 18 6	9 of 38/6	8 15 11	12 of 16/4	17 10 0
		Goodmans	Trebax	Ex/stock	5 9 3	—	—	—	—	5 9 3
		Goodmans	Midax	Ex/stock	11 16 0	—	—	—	—	11 16 0
SECTION VI	**COMPLETE LOUDSPEAKER ASSEMBLIES**									
		Lowther	Acoustica	Ex/stock	37 16 0	4 3 1	9 of 83/1	18 18 0	12 of 35/5	37 16 0
		Lowther	T P.I.	Ex/stock	96 0 0	10 11 1	9 of 211/1	48 0 0	12 of 90/–	96 0 0
		Tannoy	Canterbury	Ex/stock	57 15 0	6 7 0	9 of 127/–	28 17 6	12 of 54/1	57 15 0
		Tannoy	York	Ex/stock	75 0 0	8 5 0	9 of 165/–	37 10 9	12 of 70/3	75 0 0
		Tannoy	G.R.F.	Ex/stock	122 0 0	13 8 4	9 of 268/4	61 0 6	12 of 114/4	122 0 0
		Tannoy	Autograph	6/8 weeks	165 0 0	18 3 0	9 of 363/–	82 10 3	12 of 154/8	165 0 0
		Westrex		Ex/stock	169 0 0	18 11 9	9 of 371/9	84 10 9	12 of 159/10	169 0 0
SECTION VII	**TAPE DECKS, ETC.**									
		Truvox	Mark II	Ex/stock	23 2 0	2 10 9	9 of 50/–	11 11 9	12 of 21/7	23 2 0
		Wearite	Stereo	Ex/works 4/6 weeks	47 10 0	5 4 6	9 of 104/6	23 15 0	12 of 44/7	47 10 0
		Collaro	Mark III	Ex/stock	23 2 0	2 10 9	9 of 50/9	11 11 9	12 of 21/7	23 1 0
		Wearite	Model 2A	Ex/stock	35 0 0	3 17 0	9 of 77/–	17 10 9	12 of 32/9	35 0 0
		Wearite	Model 2B	Ex/stock	40 0 0	4 8 0	9 of 88/–	20 0 0	12 of 37/6	40 0 0
		Wearite	Model 2C	Ex/stock	45 0 0	4 19 0	9 of 99/–	22 10 3	12 of 42/2	45 0 0
		E.M.I.	Stereo Deck Control Unit	Ex/stock	122 17 0	13 10 3	9 of 270/3	61 8 6	12 of 115/2	122 17 0
SECTION VIII	**COMPLETE TAPE RECORDERS**									
		Elizabethan	'56	Ex/stock	54 12 0	6 0 1	9 of 120/1	27 6 2	12 of 51/2	54 12 0
		Elizabethan	'57	Ex/stock	68 5 0	7 10 1	9 of 150/1	34 3 0	12 of 63/1	68 5 0
		Grundig	TK5	Ex/stock	54 12 0	6 0 1	9 of 130/1	27 6 2	12 of 51/2	54 12 0
		Grundig	TK8	Ex/stock	75 12 0	8 6 3	9 of 166/3	37 16 5	12 of 70/10	75 12 0
		Grundig	TK820	Ex/stock	99 15 0	10 19 5	9 of 219/5	49 17 5	12 of 93/6	99 15 0
		Ferrograph	3/AN	4/6 weeks	79 16 0	8 15 6	9 of 175/6	39 18 9	12 of 74/9	79 16 0
		Ferrograph	3/AN/H	4/6 weeks	94 10 0	10 7 10	9 of 207/10	47 5 2	12 of 88/7	94 10 0
SECTION IX	**CABINETS**									
		Heals Console		Ex/stock	30 0 0	3 6 0	9 of 66/–	15 0 0	12 of 28/6	30 0 0
		Leak Contemporary		4/6 weeks	22 15 0	2 10 0	9 of 50/–	11 7 6	12 of 22/3	22 15 0
		Classic Functional		Ex/stock	14 14 0	1 12 4	9 of 32/4	7 7 0	12 of 15/–	14 14 0
		Classic Contemporary S/U		Ex/stock	18 18 0	2 1 6	9 of 41/6	9 9 0	12 of 19/3	18 18 0
		Classic Contemporary D/U		Ex/stock	28 7 0	3 2 0	9 of 62/–	14 4 6	12 of 27/–	28 7 0

(6 MONTHS CREDIT NO EXTRA CHARGES. BANKERS' ORDER or 6 CHEQUES WITH ORDER)

WHAT A SELECTION!

Full mail order and export facilities. Full facilities for comparative demonstrations and free technical advice. Wide range of cabinets from the simplest to the best. Come to the Hi/Fi Pioneers

CLASSIC ELECTRICAL
COMPANY LIMITED

Telephone ADDiscombe 6061/2

352/364 LOWER ADDISCOMBE ROAD, CROYDON, SURREY

Bus services 59a, 54, 12 and Green Line 725. Nearest Stns.: Woodside, Addiscombe, E. Croydon

Telegrams Classifi, Croydon, Surrey

AMPHENOL

AMPHENOL (Great Britain) **LTD.**

Invite enquiries for engineering data and details of the availability of the well known range of "AMPHENOL" products

AMPHENOL (Great Britain) **LTD.**

Ormond House, 26/27, Boswell Street, London, W.C.1

Telephone: CHAncery 8956

NOW—the easy way to buy your Test Set

M.I.P.

SERIES 100

PORTABLE TEST SET

New easy terms for purchase of the superb M.I.P. Series 100 Test Set are offered by the makers. These terms are as follows:—

Cash price £12/7/6

or deposit 47/6 and six monthly instalments of 36/-.

Other credit terms from the following suppliers:—

HOME RADIO (MITCHAM) LTD.
187 London Road, Mitcham, Surrey

FRITH RADIOCRAFT LIMITED
69-71 Church Gate, Leicester

Series 100.
21 ranges A.C./D.C.
100 microamps—1,000 volts
10,000 ohms per volt.

SEND THIS COUPON FOR FULL DETAILS WITHOUT OBLIGATION

To: MEASURING INSTRUMENTS (PULLIN) LTD.
Electrin Works, Winchester Street, Acton, W.3

Please send illustrated leaflet on the M.I.P. Series 100 Test Set together with details of the new easy payments scheme.

NAME .....

ADDRESS .....

.....

W.W.

WALMORE ELECTRONICS LIMITED

PHOENIX HOUSE, 19/23 OXFORD STREET
LONDON, W.1

Telephone: GERrard 0522 *Cables: Valvexpor*
For immediate response Telex London 8752

EXPORTERS OF **RADIO, TELEVISION** AND **INDUSTRIAL TUBES,** HAVE PLEASURE IN INTRODUCING THEIR BRAND

RADIO WALRAD TUBE

AND INVITE ENQUIRIES FROM BUYING AND CONFIRMING HOUSES **EXCLUSIVELY FOR EXPORT**

SUPPLIERS OF RADIO COMPONENTS ELECTROLYTICS, AND CATHODE RAY TUBES

This is the "SUPER 90" —MARK II

***ENORMOUS DEMAND** has made it possible to introduce a new SUPER 90—the MARK II, adding to the present advanced design these salient features at no extra cost . . .*

TRANSIT — *a new effortless freedom of transit across the record is added to TANGENTIAL TRACKING.*

ACTION — *the MARK II Swiss type bearings of high precision are self-lubricating.*

FORCE — *even lower vertical force can now be achieved.*

RIGIDITY — *this is implicit in the design of the new 'T' type pillar.*

SIMPLICITY — *height adjustment ring makes mounting on a turntable of any height simplicity itself.*

BJ

BURNE - JONES & COMPANY LIMITED
SUNNINGDALE ROAD, CHEAM, SURREY

SEE YOUR DEALER TODAY

ACOS WHARFEDALE GOODMANS ACOUSTICAL M.S.S.
GILSON PHILIPS GARRARD SCOTCH-BOY WELWYN CHAPMAN PARTRIDGE "LAB" BURNE-JONES W.B. ARMSTRONG BELLING-LEE RCA. T.C.C. GOLDRING S. G. BROWN TANNOY LOWTHER ROGERS LEAK COLLARO

YOU WILL FIND ALL THESE IN OUR 1958 FULLY ILLUSTRATED ★ CATALOGUE ★

Send coupon and two 3d. stamps

NAME .....
ADDRESS .....
.....
.....

Cut out and post to:

BERRY'S RADIO
25 HIGH HOLBORN, LONDON, W.C.1
Telephone: Holborn 6231-2

PREMIER



207, EDGWARE ROAD, LONDON, W.2. Tel: AMB 4033 & PAD 3271 YOUR LEADING DO-IT-

THE "Petite" PORTABLE

MAY BE BUILT FOR **£7-7-0** plus 3/- post & packing.

Batteries extra.
HT 10/- (Type B126) or equivalent.
LT 1/6 (Type AD 35) or equivalent.

- ★ Size only 8in. x 8in. x 4½in.
- ★ Weight, including batteries, 5½lb.
- ★ 4 valves of the economy type.
- ★ Medium and long wave superhet circuit
- ★ High Q frame aerials.
- ★ High sensitivity on both wavebands.
- ★ Prealigned IF transformers.
- ★ 5in. speaker of the latest type.
- ★ Automatic on/off switch operated by lid.
- ★ Designed in our own laboratory.
- ★ Backed by an up-to-date Technical Information Dept.
- ★ Components available separately if desired.
- ★ Simple to construct, using normal soldering methods.
- ★ Instruction book 1/6.

Mains unit now available for only 37/6 plus 2/- pkg. & carr. Send for leaflet.

The PREMIER RECORD PLAYER

MAY BE PUT TOGETHER FOR ONLY **£9-19-6** plus 5/- packing & postage.

Each Unit may be purchased separately as follows:—

Cabinet in maroon and fawn (size 13¾ × 11 × 6½in.)	£2/10/-
1 Valve Amplifier	£2/19/6
7 × 4in. Elliptical Speaker	£1/1/6
B.S.R. TU8 Turntable and Pickup	£3/19/6

This can also be supplied complete with the **Latest Collaro 4-speed Junior Turntable and Pickup** for only £10/12/6 plus 5/- packing and postage.

If any of the individual items are purchased kindly add the postage as follows: Cabinet 3/-, Amplifier and Speaker 3/-, Turntable 2/6.

STIRLING VHF/FM TUNER UNIT

A cleverly designed Unit suitable for installation either in existing equipment or as an external Unit. Completely self contained with its own power supply. The latest type permeability tuned circuit is used, tuning drift being negligible. Size 7½ × 7½ × 2½in. Cash Price **£13/13/-.** Postage and packing 2/6 extra. Cr. Terms £1/15/- deposit and 8 monthly payments of £1/13/6. Plus postage and packing of 2/6.

WHY BUY SURPLUS OR RE-CONDITIONED TUBES WHEN THESE FULLY GUARANTEED WIDE ANGLE TUBES ARE AVAILABLE? THE LATEST TYPE 17in. RECTANGULAR TUBE AT £17 (INCL. TAX), POST AND PACKING 21/- EXTRA. ALSO 14in. RECTANGULAR TUBE TYPE 14LPA £13/19/6 (INCL. TAX) PACKING AND CARRIAGE 15/- EXTRA.

Build the NEW "MAYFAIR" TELEVISOR

which gives complete SAFETY to the constructor!



These Televisors use a double wound mains transformer which gives you complete safety from contact with the mains supply when handling the chassis or controls.

★ B.B.C. & I.T.A. DESIGN

WITH NEW TURRET TUNER MAY BE BUILT FOR **£33-7-11** PLUS COST OF C.R.T.

Build in 5 Easy Stages. Full Construction details available. Instruction Book 3/6 Post Free.

CONSOLE CABINETS with full length doors for 14in., 16in. and 17in. tubes. PRICE £14/14/-. H.P. Terms: Deposit £7/7/6 and 9 monthly payments of 18/6.
CONSOLE CABINETS. Half-door £12/12/-. H.P. Terms: Deposit £6/6/- and 8 monthly payments of 18/3. On above cabinets add 21/- for pkg. and carr.

PLEASE ADDRESS ALL MAIL ORDER ENQUIRIES TO

RADIO CO

YOURSELF SPECIALISTS 23 TOTTENHAM COURT RD., LONDON, W.I. Tel: MUSeum 3451

Build this New

TAPE RECORDER KIT

for only

£38.15.0

This Kit comprises:
2-speed lane Mk. VI Deck £18/10/-
Premier Tape Amplifier complete with separate plug-in-type power pack £14/0/-
7 × 4 Elliptical Speaker £1/1/6
De-luxe Cabinet with gilt fittings and detachable lid £4/19/6
Reel of Scotch Boy 1,200ft. Tape and empty Spool £1/11/6
Latest Type ACOS microphone ... £2/15/-
All the above sections can be purchased separately.

The New De-Luxe

TAPE RECORDER TR3

for £6/5/- DEPOSIT AND 8 MONTHLY PAYMENTS of £5/17/11 OR CASH 45 gns. plus 21/- post & pkg.

Case finished in Red and Cream with Gilt styling and fittings. Size 18½ × 15 × 9in. For A.C. mains 200/250 v. 50 cycles. Complete with tape and latest Acos microphone 2-speed twin track giving 1 or 2 hours recording respectively, incorporating a 10 × 6in. high flux loudspeaker.

THE PREMIER 2-valve Printed Circuit 3-Watt Gram Amplifier using a Mullard UY85 and a Mullard UCL83. Supplied completely assembled and tested for only £3/5/6 plus 2/6 packing and postage.



Why not make the best!

MULLARD AMPLIFIER KIT

NOW SUPPLIED WITH ULTRALINEAR OUTPUT TRANSFORMER.
All the components for model 510, PLUS pre-amplifier, on one chassis (total six valves), chassis gold hammer finished. May be purchased for £12/12/- plus pkg. and post 7/6. This version complete and tested £15/15/-. Or pre-amplifier and tone control in a separate unit £14/14/- plus pkg. and post 7/6.

At last!

PREMIER RADIO CO.
HAVE OPENED A BRANCH IN THE MIDDLE OF THE WEST END AT

23 TOTTENHAM COURT RD.

The best Hi-Fi Showroom in the district!
(2 Mins. from Tottenham Court. Rd. Underground Stn.)

TEL: MUSEUM 3451



COMPACT GRAM AMPLIFIER



Complete ready to connect to any type of Pick-up and Speaker (3 ohms) A.C. Mains 200/250 v. Volume and tone control fitted with knobs. Overall size 7½in. long × 3½in. wide × 2¾in. high.

£2 : 19 : 6

Plus packing and postage 2/6.

Suitable speaker 7 × 4in. elliptical 21/10.

CABINETS—PORTABLE

MODEL PC/2
Grey Lizard Rexine covered 45/-
Overall dimensions 15in. × 13¼in. × 6¾in. Clearance under lid when closed 3in.

MODEL PC/2 DE LUXE
Two colours, wine and grey, with cut-out for speaker and amplifier 55/6
Dimensions 15in. × 14in. × 7¾in.

MODEL PC/3
Grey Lizard Rexine covered 9 6
Overall dimensions 16¾in. × 14¼in. × 11in.
Clearance under lid when closed 3¾in.

MODEL PC/3 DE LUXE
As above but with cutouts for Speaker and Amplifier 79/6
Dimensions as above.

THE ABOVE CABINETS ARE COMPLETE WITH CARRYING HANDLE, FASTENERS AND PANEL.
Packing and Postage 3/- each.

Junction Transistors 10/- each
Equivalent of the OC70 Type

CONTINENTAL STYLE CABINET

Dark Piano finished with gold and black styling, overall size 39in long, 32¾in. high, 16in. deep. Two sliding doors, concealing on the left a black panel 18¼in. × 20¼in. finished in medium mahogany, and on the right a detachable board 12¼in. × 18¼in. and a shelf which may be used for record storage. Cash Price **18 gns.**, plus 25/- pkg. and carr Credit Terms: Deposit £2/18/- and 8 monthly payments of £2/6/-.

The new Spencer-West Band Three converter is now available at £6/5/- plus pkg. and post 3/-.

Spencer-West Pattern Unit 25/- plus 1/- pkg. and post. For elimination of B.B.C. interference or I.T.A.



PREMIER BUREAU DE LUXE

A superb cabinet in finely figured walnut veneer. Interior light sycamore with rexine matching lining. Overall dimensions: 33in. high, 34in. long, 17¼in. deep. Uncut control panel on right-hand side approximately 16in. × 10¼in., uncut baseboard on left-hand side 15¾in. long, 13¼in. deep. Two full size felt-lined storage cupboards in the lower part of the cabinet.
Cash price ..... 16½ gns.
Credit Terms: Deposit £2/6/6 and 8 monthly payments of £2/3/2. Packing and Carriage 25/- extra.

We carry a comprehensive stock of components by all leading manufacturers.

(Dept. WW) 207 EDGWARE ROAD · LONDON W.2.

YOU'LL DO BETTER WITH PREMIER

The latest
COLLARO
4 speed single player unit complete with pick-up and turnover car-tridge .... £4/12/6 plus 2/6 pkg. and carr.

THE MERCURY SWITCHED F.M. TUNER
BY JASON



5 VALVES
FOSTER-SEELEY DISCRIMINATOR

Complete set of parts can be purchased for £9.19.6 plus 2/6 p.p.
All the components can be purchased separately. The main components are as follows:—

Chassis	6/6
2 side panels, pair	3/-
Prefabricated front-end completely wired and tested with IEF80 and IECF 80 (incl. P.T.)	£6/5/-
Discriminator	11/6
2 I.F. Transformers at 5/9 each	11/6
Complete instruction book	2/-

POCKET VOLT TEST METERS
Two ranges, D.C. 0-250 v., 0-25 v., complete with leads in canvas case. In leather case 1/6 extra. **12/6**
Plus 2/6 post and packing.

15 amp M/C 2½in. Round Charging Meter, price 8/6, plus 1/- p. & p.

1 m/A M/C 2½in. Round. Price 21/6, plus 1/- p. & p.

2-VOLT 16AH BAKELITE CASED
ACCUMULATOR
By Oldham, Dagenite, Exide. New and unused, unspillable. 7½ × 4 × 2.
Price **6/6** plus 1/6 post and packing.

B.S.R. TU8 3-speed Record Player with Pick-up £3/19/6

Introducing—
LORENZ MODEL PL 562
4-speed gram. motor.
Price **£3 . 13 . 6**

THE STAAR "GALAXY"
4-speed mixture Auto-changer. Finger-tip stop, start and speed change control. Size 10½in. × 12½in. A.C. mains 110-250 v. Price £9/15/- plus 4/6 pkg. and carr.

Credit Terms £1/15/- and 8 monthly payments of £1/5/9.

COLLARO R.C.456
4-SPEED AUTOCHANGER
Designed to play 12in., 10in. and 7in. Records intermixed in any order at 16, 33⅓, 45 or 78 r.p.m. Capacity 10 records. New reversible Dual Stylus Crystal Pick-up for use on 100/250 v. 50 cycle A.C. mains. £9/15/- plus packing and postage 5/-. Deposit 25/- and 8 monthly payments of 25/9.

2-BAND TRF RECEIVER MAY BE BUILT FOR £5.15.0
plus pkg. & post 3/-

3-BAND SUPERHET RECEIVER
MAY BE BUILT FOR **£7 . 19 . 6** Plus 3/- Pkg. & Postage

These two receivers use the latest type circuitry and are fitted into attractive cabinets 12in. × 6½in. × 5½in. in either walnut or ivory bakelite or wood. Individual instruction books 1/- each, post free.

THE JASON "ARGONAUT"
MW/FM DESIGN



★ **All Premier components are designer approved**

ALL components to build the complete Receiver, including output stage, may be purchased for £15/5/-, or all components less output stage but including Power Supply, for £13/19/6, plus packing and postage 3/6 on each.

AM/FM RADIOGRAM CHASSIS
OF THE LATEST TYPE

Cash £22/10/-, or credit terms £3/10/- deposit and 8 monthly payments of £2/14/8. H.P Terms £11/5/- deposit and 12 monthly payments of £1/0/11. Packing and Carr. 7/6. This chassis has 8 valves and covers short, medium and long FM and Gram. Printed circuit on F.M ensures a high degree of stability. Overall size 14in. long, 6½in. high, 9in. deep. Dial size 12 × 5½in.



Build the
ONE VALVE BATTERY RECEIVER
AS SHOWN ON B.B.C. T.V.
This Receiver contains a DAF96 valve and a pair of 4,000 ohm headphones and is powered by a combined 67½ and 1½ volt battery.
Price complete with headphones and including battery **45/-**
Send for free diagram.

TERMS OF BUSINESS
Cash with order or C.O.D. over £1. Please add 1/- for Post Orders under 10/- 1/6 under 40/- Unless otherwise stated.



Introducing the
PHONOTRIX
BATTERY TRANSISTOR MINIATURE
TAPE RECORDER
supplied complete with Microphone and small Loudspeaker, operates on 4 U2 Torch batteries, weighs only 4 lb. and plays for 30 minutes. Size 6½ × 4⅝ × 3½in. complete plus 5/- pkg. and post. Retail Price **26 gns.** OR on Credit Terms: Deposit £3/8/- and 8 monthly repayments of £3/10/-.

★ **IT WILL PAY YOU TO VISIT OUR NEW HI-FI DEMONSTRATION ROOM**



THE NEW TSL FM TUNER HIGH STABILITY MODEL
6 valves including Magic Eye and Power Supply using the latest type Gorler permeability Unit complete with first audio stage and preset output volume control. Maximum radiation less than 10 microvolts per metre. Sensitivity better than .5 microvolts. Cash price £17/10/- (inclusive) or Credit Terms: Deposit £2/10/- and 8 monthly payments of £2/3/2. Postage and packing 5/- extra.



8 WATT AMPLIFIER
This design includes 5 miniature valves of the latest types, an Ultralinear Output Transformer suitable for Speakers of 3 and 15 ohms, and a very attractive perspex front panel with gold lettering, complete set of parts £8/8/-. Postage and packing 5/- extra. Or £10/19/6 built and tested.



4 WATT AMPLIFIER
MAY BE BUILT FOR **£4 . 10 . 0** Plus 2/6 Pkg. & Postage

Instruction Book 1/- post free.
A steel case is now available, complete with engraved panel, for 15/6 extra. The amplifier may be supplied complete for £5/5/- plus pkg. and post 3/6, or fitted in case at £6 plus pkg. and post 3/6. Engraved panel 3/6. Post free.

PREMIER RADIO CO. (Dept. W.W.) 207 EDGWARE RD., LONDON, W.2. Tel: AMBassador 4033

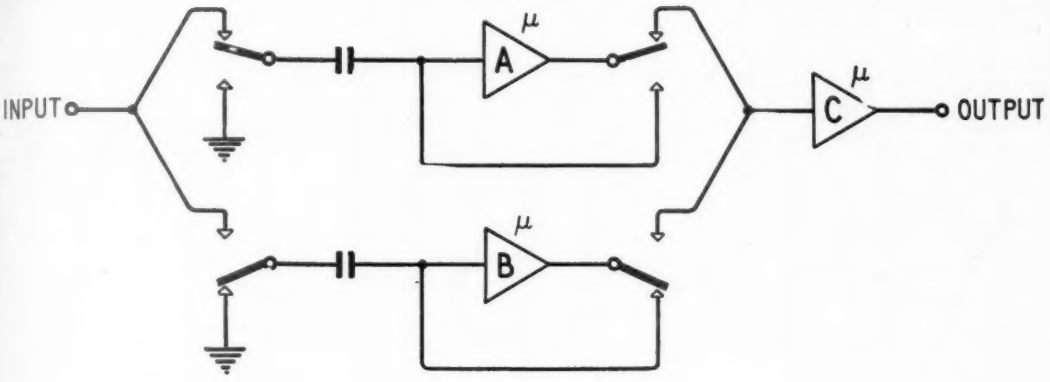

Cascade-Balance Amplifier

Part 1 of an article "New Types of D.C. Amplifier" in the January issue of ELECTRONIC AND RADIO ENGINEER describes an amplifier with a response from zero frequency to 25 kc/s. It embodies a new method of drift correction which enables a drift of less than 100μV referred to the input to be obtained for slow mains-voltage changes of $\pm$ 10%. This is for a gain of 1,000 times and at an output impedance of 20Ω.

Original articles by leading authorities are a prominent feature of ELECTRONIC & RADIO ENGINEER. Regular readership will keep you in constant touch with progress in the entire field of electronics, radio and television.

ARTICLES IN THE FEBRUARY ISSUE WILL INCLUDE . . .

TOTAL DIFFERENTIAL FEEDBACK. An amplifier has two channels with a special feedback system which enables the amount of feedback to be greatly increased without affecting the stability margin. It is arranged so that a failure in one channel enables the amplifier to continue operating, but at an increased distortion level.

FOSTER-SEELEY DISCRIMINATOR. An analysis is given of the essential characteristics of this well-known f.m. discriminator and the optimum relation between the circuit elements are derived.

ALSO
The unique monthly Abstracts and References feature compiled by the Radio Research Organization of the Department of Scientific and Industrial Research.

POST THIS COUPON TODAY

ELECTRONIC & RADIO ENGINEER

TO: ILIFFE & SONS LTD., DORSET HOUSE, STAMFORD STREET LONDON, S.E.1

Please enter my name as a subscriber to:—
ELECTRONIC & RADIO ENGINEER *for 12 months commencing with the February issue. I enclose remittance £2 9s. (U.S.A. and Canada $7.50).*

NAME .....

ADDRESS .....

.....

DATE .....

ORDERS CAN ALSO BE PLACED THROUGH ANY NEWSAGENT

MAKE CERTAIN OF

RELIABILITY

Reliability proved by tremendous production

Reliable components are the first essential to the smooth running of factory and production line.

That is why more and more manufacturers are turning to the Monarch.

The Monarch is the development of a proved and successful design, and is tested and re-tested before it leaves B.S.R.—it is ready to go straight into the set. You can employ the Monarch confident in the knowledge that there are no delays and technical troubles.

The Monarch helps to build the reliability of your product—investigate it without delay.

. . . MAKE CERTAIN OF THE

Monarch UA8

* Also available is the T.U.9 single record player and matching pick-up. The world-proved Ful-Fi turnover crystal cartridge is fitted to both Monarch and T.U.9.

World's most reliable four-speed autochanger!

BIRMINGHAM SOUND REPRODUCERS LTD., OLD HILL, STAFFS.

Wireless World

ELECTRONICS, RADIO, TELEVISION

Managing Editor: HUGH S. POCOCK, M.I.E.E.
Editor: F. L. DEVEREUX, B.Sc.

FEBRUARY 1958

In This Issue

51	Editorial Comment	
52	World of Wireless	
55	Training Technicians in U.S.A.	*By John Gray*
57	Design for a Folded Corner Horn	*By H. J. F. Crabbe*
63	U.H.F. in U.S.A.	*By Jack Darr*
67	Measuring TV Aerial Performance—1	*By F. R. W. Strafford*
70	Magnetism in Materials—2	*By D. H. Martin*
75	Combined Test Prod and Clip	*By C. Bayley*
77	Ionosphere Review—1957	*By T. W. Bennington*
79	Letters to the Editor	
81	Technical Notebook	
83	Pulse-Type Frequency Measurement	*By J. C. Muller*
86	U.K. Television	
88	Manufacturers' Products	
89	Atoms	*By "Cathode Ray"*
93	New Frequency-shift Telegraphy System	
94	Transistor Amplified A.G.C.	*By W. Woods-Hill*
95	Short-Wave Conditions	
96	News from the Industry	
97	February Meetings	
98	Random Radiations	*By "Diallist"*
100	Unbiased	*By "Free Grid"*

VOLUME 64 No. 2

PRICE: TWO SHILLINGS

FORTY-SEVENTH YEAR OF PUBLICATION

◆ ◆ ◆ ◆ ◆ ◆

Offices: Dorset House, Stamford Street, London, S.E.1.

Please address to Editor, Advertisement Manager or Publisher, as appropriate.

Telephone: WATerloo 3333 (60 lines)

Telegraphic Address: "Ethaworld, Sedist, London".

PUBLISHED MONTHLY (4th Tuesday of preceding month) by ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1. *Telephone:* Waterloo 3333 (60 lines). *Telegrams:* "Iliffepres, Sedist, London." *Annual Subscriptions: Home and Overseas,* £1 15s. 0d. *Canada and U.S.A.* $5.00. Second-class mail privileges authorised at New York. N.Y. BRANCH OFFICES: *BIRMINGHAM:* King Edward House, New Street, 2. *Telephone:* Midland 7191. *COVENTRY:* 8-10, Corporation Street. *Telephone:* Coventry 5210. *GLASGOW:* 26B Renfield Street, C.2. *Telephone:* Central 1265. *MANCHESTER:* 260, Deansgate, 3. *Telephone:* Blackfriars 4412. NEW YORK OFFICE: *U.S.A.:* 111, Broadway, 6. *Telephone:* Digby 9-1197.

Transistor R.F. Stages for Portable Receivers

This circuit indicates the use of Mullard r.f. transistors, types OC44 and OC45—in the frequency multiplying and i.f. amplifying stages of an all-transistor portable radio receiver. These transistors are intended primarily for the types of application they have in this circuit. The OC44 is used as a self-oscillating mixer and each OC45 functions as an i.f. amplifier.

Frequency Changer—OC44

The input signal for the self-oscillating mixer stage is taken from the aerial coupling coil (by way of the selector switch) to the base—the most sensitive input point—of the OC44. Oscillator feedback is taken from the collector of the transistor to the emitter through low-impedance windings on the oscillator coil.

The oscillator tuned circuit is similar to the types used in valve receivers, since the reflected capacitance from the transistor is very small (about 1pF). The Q of the oscillator coil is somewhat higher than in valve receivers, however, to allow for transistor damping. A shaped oscillator section in the tuning capacitor is used to obtain correct tracking of the aerial and oscillator circuits. The value of tuning capacitance is not critical, although it must be sufficient to provide the desired frequency coverage. The values of capacitance chosen are 175pF and 123pF for the aerial and oscillator sections respectively, and a screen is provided between the sections to reduce any stray capacitance between them.

To ensure that the oscillator starts easily, the OC44 is biased initially for Class A operation with the normal stabilisation circuit. However, as the amplitude of oscillation increases, rectification of the oscillator voltage at the emitter causes a steady voltage to be developed across the resistance and bypass capacitance in the emitter circuit. This voltage tends to bias the transistor into Class B operation, and also stabilises the amplitude of oscillation. At the same time, this voltage increases the quiescent current taken by the transistor.

A minimum level of noise is achieved when the direct emitter current in the frequency changer is about 0.25mA. In addition, the fall in gain and the phase shift in the OC44 (up to the maximum oscillator frequency of 2.07Mc/s) are small with this value of current. Furthermore, the effect of spreads in the h.f. performance of the transistor is also small. Consequently this value of 0.25mA (it rises to 0.3mA when the oscillator is functioning) has been chosen for the emitter current of the OC44.

I.F. Amplifier—OC45

The internal feedback which can appear in a transistor used for h.f. amplification can complicate the design of an i.f. stage. This feedback can produce oscillation in the same way that oscillation is caused by the anode-to-grid capacitance of a triode used as a tuned amplifier. Even if oscillation does not occur, this feedback can cause serious distortion of the frequency response of the amplifier, so it is obviously desirable to neutralise it in some way.

It is possible to achieve neutralisation by introducing an external feedback path containing suitably chosen values of resistance and capacitance. When both the purely resistive and the reactive elements of the internal feedback path have been neutralised completely, the result is known as *unilateralisation*. With unilateralised stages, the design of the amplifier becomes relatively straightforward.

The i.f. amplifier consists of two OC45 transistors each connected in unilateralised grounded-emitter stages. The external feedback components are the two resistors (1.2 and 3.9kΩ) and the two capacitors (56 and 18pF) drawn above the supply line in the circuit. The power gain of the first stage of the i.f. amplifier is 31.2dB when there is no a.g.c. action in the circuit, and that of the second stage is 34dB. Neither of the values of gain exceeds a quarter of the loop gain necessary to produce oscillation when the feedback capacitors are at the extreme of the tolerance range, and consequently the stability of the amplifier is high.

Transformer Windings		
Circuit Ref.	Coil Pin Nos.	No. of Turns
T2	5–6	18·5
	1–3	
	4–3	86
T3	2–5	45
	1–3	150
	4–6	7·5
T4	2–3	45
	3–4	105
	1–5	5·5
T5	2–3	8½
	3–4	18
	1–5	

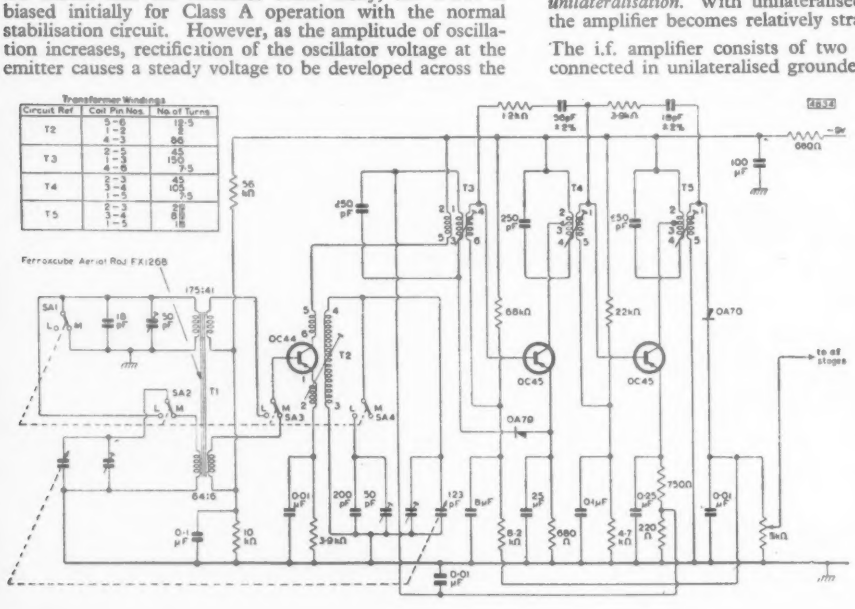

Mullard T.S.D. DATA and PUBLICATIONS SECTION, MULLARD LTD., MULLARD HOUSE, TORRINGTON PLACE, LONDON, W.C.1
MVM386

FEBRUARY 1958

Vol. 64 No. 2

Wireless World

A Change of Wind?

THE announcement that Sir Lawrence Bragg has consented to act as chairman of the new Frequency Advisory Committee, which has been set up by the Postmaster-General to advise him on the broad aspects of frequency allocation, offers some hope of a more liberal approach to this problem than has been evident in the past.

The Committee is broadly based and it is difficult to imagine any interest which will not be represented by one or more of the appointed members.* Discussion in open committee of rival claims is in itself an important advance over the previous practice of independent consultation between the P.M.G. and his competitors for channel space. The inclusion of Post Office representatives in the list of members of the Committee will be a matter for satisfaction if it means that the P.M.G. will now be called upon to state a case for his own requirements on equal terms with other users.

There remains the vexed question of the Armed Services who may offer "security" as sufficient excuse for refusing to justify a claim for particular frequencies. Priorities of this kind can be settled only at Cabinet level, where arguments should be assessed and presented by a Minister who is not directly responsible for either defence or communications, but who has a call on the best scientific and technical advice available. The suggestion, made by C. I. Orr Ewing, M.P., as far back as 1955† that the Lord President of the Council would be well qualified to perform these duties still seems to us to be a good one.

As far as civil claims are concerned, the new committee is a step in the right direction, extending as it does the work already initiated by the Mobile Radio Users' Association and the R.C.E.E.A. Frequency Planning Advisory Committee. The new chairman brings to his task a clear mind and the gift of lucid expression; it goes without saying that he has the basic scientific knowledge to get quickly to the technical roots of the problem. We wish him well in the complex and onerous task he has undertaken.

If by goodwill and a rational approach this committee, in spite of its size, shows itself capable of working quickly to wise and practicable conclusions it may well pave the way to the establishment of a supra-departmental British Communications Commission with executive powers which would take over the P.M.G.'s present invidious duties in frequency allocation.

Simpler Units

IN the January issue (p. 50) "Free Grid" complained of the clumsy fractions which are commonly used to express the standardized speeds at which magnetic recording tape is transported past the heads, and suggested the use of a new unit (the "Stille") to represent, say, a speed of $1\frac{7}{8}$in/sec. A correspondent in this issue gives an authoritative account of the origin of these speeds, but finds it difficult to see any practical advantage in using the proposed geometrical progression of whole numbers (e.g., 1, 2, 4, etc. "Stilles" instead of $1\frac{7}{8}$, $3\frac{3}{4}$, $7\frac{1}{2}$ etc. in/sec).

In this matter, our sympathies are with "Free Grid" who has to write and our printers who have to set these irritating fractions. The flying fraternity have long since given up writing "981 cm/sec/sec" and "761.6 m.p.h. at sea level and 59°F" (or if this is not correct, something even more complicated): they just put down "g" and "Mach 1" and their colleagues know at once what they are talking about.

We are disappointed that "Free Grid" should have chosen to immortalize one of the commercial impresarios of magnetic recording rather than one of its scientific or technical worthies, but we appreciate his difficulty. Much as we should like to see Dr. Pfleumer (oxide-coated tapes) or Carlson and Carpenter (a.c. bias) honoured in this way, the possibility of contraction of the appropriate units to "pF" and "c.c." would be certain to cause misunderstanding. Any suggestions?

*A detailed list appears on the following page.

†See WIRELESS WORLD, May, 1955, page 215.

WORLD OF WIRELESS

Frequency Advisory Committee

A FEW months ago the P.M.G. in a written reply to a question in the House of Commons stated that he was appointing a committee to advise him on the broad aspects of frequency planning. He has now announced the membership of the committee, and its terms of reference—"To advise the Postmaster General on the broad aspects of radio frequency planning with a view to the efficient use of the radio frequency spectrum and the economic development of equipment for that purpose by the radio industry."

Sir Lawrence Bragg, F.R.S., director of the Davy Faraday Laboratory of the Royal Institution, is chairman.

The members are:—G. Berry (nominated by the Association of Municipal Corporations), Cdr. K. B. Best (Home Office), Sir Harold Bishop (B.B.C.), Capt. C. F. Booth (Post Office), J. R. Brinkley (Pye Telecommunications), J. Clarricoats (R.S.G.B.), W. G. Downey (M.o.S.), Sir Robert Fraser (I.T.A.), Supt. F. Gee (nominated by the County Councils Association), R. W. N. B. Gilling (M.T. & C.A.—Marine & Inland Transport), T. E. Goldup* (Mullard), Col. E. J. C. Harrison (British Joint Communication-Electronics Board), M. van Hasselt (S.T.C.—nominated by Telecommunication Eng'g. & Mftg. Assoc.), Capt. C. A. James (Admiralty), K. I. Jones* (Cossor), R. J. Kemp* (Marconi's), Air Comdre. H. G. Leonard-Williams (Air Ministry), Capt. L. P. S. Orr, M.P. (Mobile Radio Users' Association), G. F. Peirson (nominated by the Nationalized Fuel and Power Industries), C. G. Phillips (M.T. & C.A.—Civil Aviation), Dr. R. L. Smith-Rose (D.S.I.R.), Maj. Gen. L. de M. Thuillier (War Office), W. A. Wolverson (Post Office), Capt. F. J. Wylie (Chamber of Shipping), and E. Sharpe (Post Office), secretary.

* Nominated by the Radio Industry Council.

Guided "Missilry"

A FIRST course of instruction in the principles of guided weapon design and operation for post-graduate engineers and scientists from N.A.T.O. countries was started at the College of Aeronautics, Cranfield, Bucks., in October, 1956. Students are nominated by their Governments and in the second one-year course 24 students from seven foreign countries are participating. Two-thirds of the present students are serving officers.

Discussions on co-operative training have been held on both sides of the Atlantic and it has been suggested in America that a N.A.T.O. "missilry" training centre should be set up. It would seem that in the Cranfield courses we already have a nucleus which could be expanded to meet any future requirements.

Automation and Computation.—A consortium of some 20 organizations interested in automation and computation set up as the British Conference on Automation and Computation is to be organized as three groups, each covering a different aspect of the subjects. What is to be known as the British Group for Computation and Automatic Control, consisting of 23 member associations, has elected T. E. Goldup, this year's president of the I.E.E., as its chairman, with J. F. Coales, of the Society of Instrument Technology, as one of the vice-chairmen. Communications for the group should be sent care of the I.E.E., Savoy Place, Victoria Embankment, London, W.C.2.

Stereophonic Broadcasting.—Tests were conducted by the B.B.C. after normal broadcasting hours on January 13th and 14th using the Brookmans Park (m.w.) and Wrotham (v.h.f.) Home Service transmitters for one sound channel and the Wrotham Third Programme frequency and Crystal Palace TV sound carrier for the other. Further tests may take place, some possibly in broadcasting hours.

Exports Up Again.—Although figures for December are not available at the time of writing, it would appear from the figures for the first 11 months of the year that 1957 will have provided a record volume of radio exports. At the end of November the total was £39.7M, which is only £0.5M short of the figure for the whole of 1956.

WIRELESS WORLD INDEX

The index to the material published in Volume 63 of *Wireless World* (1957) is now available. It includes both general and classified indexes, and is obtainable from our Publishers price 1s. (postage 3d). Cloth binding cases with index cost 7s. 6d. (postage and packing 1s. 6d.). Our Publishers will undertake the binding of readers' own issues, the cost per volume, including the index and binding case, being 22s. 6d., plus 2s. 6d. postage and packing.

B.B.C. Crystal Palace television tower dominates the South London landscape. At present two aerials are installed, one for Channel I and another, on top of the 710-ft tower, for experimental u.h.f. transmissions. Provision is made for installing two Band III aerials, the original design of the top-mast having been amended at the Government's request to make provision for the possible installation of an I.T.A. aerial. In the left foreground is the temporary 200-ft mast initially used by the B.B.C. Both the mast and the tower were built by B.I. Callender's.

Receiving Licences.—Domestic sound-only receiving licences current at the end of November totalled 6,688,720. Combined television and sound licences increased by 133,113, bringing the total to 7,657,184. Car radio licences totalled 327,818. The overall number of licences in the U.K. was 14,673,722—a decrease of 3,890 during the month.

Anglesey's v.h.f. station is to be built near Llanddona and is expected to be completed by the autumn. It will operate on 89.6, 91.8 and 94.0 Mc/s.

TV in Canada.—The Canadian Government is being urged by the Canadian Chamber of Commerce to set up an independent organization to control both government and independent television and sound broadcasting. At present the Canadian Broadcasting Corporation, which operates a sound and television service on the lines of the B.B.C. (except that they do have some sponsored programmes) also has the control over the allocation of channels to privately operated commercial TV and sound stations.

Australia, which at present has six television stations (one national and two commercial stations in both Sydney and Melbourne) is inviting tenders for the erection of stations in the other four State capitals, Brisbane, Adelaide, Perth and Hobart.

Brit.I.R.E. Council.—At the 32nd annual general meeting of the Institution, G. A. Marriott, director of the M.O. Valve Co., was re-elected president for a second year. The four vice-presidents, L. H. Paddle, J. L. Thompson, Prof. Emerys Williams and Prof. E. E. Zepler were also re-elected. To fill the four vacancies on the council the following were elected: A.V-M. C. P. Brown (Redifon), Col. G. W. Raby (Atomic Power Constructions), S. J. H. Stevens (Ministry of Supply) and A. H. Whiteley (Whiteley Electrical).

Semi-conductor Metallurgy.—A one-day symposium on "Metallurgical Aspects of Semi-Conductors" is being organized by the Institute of Metals. It will be held at the College of Technology, Gosta Green, Birmingham, on February 25th. Particulars are available from the Institute at 17, Belgrave Square, London, S.W.1. Tickets are not required for the meeting.

Higher technological courses, being held in 40 colleges in London and the Home Counties during the Spring and Summer terms, are outlined in the Bulletin of Special Courses in Higher Technology issued by the Regional Advisory Council for Higher Technological Education. They are mostly part-time evening courses but 18 full-time courses of not more than three months' duration are also included among the 260 listed. The 70-page booklet is obtainable from the Council at Tavistock Square, London, W.C.1, price 3s post free.

Radar Association.—A meeting of members of the Radar Association is being held on January 29th at which it is proposed to introduce the word "electronics" into the title of the Association.

Television Society's headquarters have been transferred to 166-170, Shaftesbury Avenue, London, W.C.2. The Society's meetings, however, will continue to be held in the Theatre of the Cinematograph Exhibitors' Association, 164, Shaftesbury Avenue, W.C.2.

Head Office of the Radio Officers' Union has been transferred to Radio House, 4-6, Branfill Road, Upminster, Essex. The telephone number is unchanged (Upminster 2321).

Perpetuating an error which appeared in the programme of the International Components Symposium at Malvern we referred in our note "Oxide Film Resistors" (page 596, December) to Dr. G. V. Planer's company as Planer Laboratories. It should be G. V. Planer, Ltd., of Sunbury-on-Thames, Middlesex.

A correction.—Livingston Laboratories ask us to say that in the advertisement on p. 30 of the January issue the sterling price of the Type 515 oscilloscope should be £303 and not £290.

EDITORIAL ASSISTANT WANTED

Wireless World invites applications for a post as editorial assistant. The duties are as varied as the contents of the journal and call for wide technical interests, a well-developed critical faculty and a talent for lucid exposition. A good grounding in physics and some experience in radio and electronics are essential; evidence of writing ability would be an advantage.

Applications should be addressed to the Editor, *Wireless World*, Dorset House, Stamford Street, London, S.E.1.

Personalities

Vice-Admiral J. W. S. Dorling, C.B., M.I.E.E., is to retire on medical advice from the directorship of the Radio Industry Council, a position he has held since the formation of the council in 1946. Admiral Dorling had a distinguished career as a wireless officer in the Royal Navy. Between the two wars he served successively as fleet wireless officer, director of the signal department at the Admiralty, and captain of H.M. Signal School, Portsmouth. His retirement takes effect from October 31st.

Dr. W. R. G. Baker retired from the vice-presidency of the General Electric Company of America on reaching the age of 65 in November and has become vice-president of Syracuse University, in charge of research. Dr. Baker joined the company's engineering laboratory at Schenectady in 1917. His best-known contribution to the American radio industry is probably the direction of its two National Television System Committees, the first to establish standards for the American monochrome service and the second, appointed in 1950, to set up standards for what is now known as the N.T.S.C. colour system.

J. A. Smale, C.B.E., A.F.C., B.Sc., M.I.E.E., who retired last year from Cable & Wireless, of which he had been engineer-in-chief for 10 years, has been elected a fellow of the American Institute of Radio Engineers "for pioneering work in telecommunications." Since his retirement from C. & W., Mr. Smale has been technical consultant in telecommunications engineering to Marconi's and is part-time chairman of the Cyprus Inland Telecommunications Authority.

As a result of the reorganization of the special products division of Ultra Electric, **W. H. Medcalf,** A.M.I.E.E., becomes chief engineer, **R. M. W. Grant,** M.I.E.E., factory manager and chief executive in charge of all production activities, and **A. M. Pollock,** commercial manager. The division, which is concerned with the production of radar equipment, aircraft electronic equipment, and the well-known Sarah radio rescue beacon, is under the general management of **A. V. Edwards,** a director of the company. Mr. Medcalf, who joined Ultra from the G.E.C. Research Laboratories in 1945 as assistant chief engineer, has been deputy chief engineer since 1948. Mr. Grant, who was until recently factory manager of the G.E.C. transformer works at Witton, was development design engineer in Marconi's high-power transmitter group from 1936 to 1946.

J. Cunningham-Sands, A.M.Brit.I.R.E., has left Rudman Darlington & Co., where he has been associated with the development and production of Reflectograph tape recorders, and has joined Multimusic, Ltd., the new Multicore subsidiary (see "News from the Industry"). This new company has acquired the

patents, goodwill and trade marks in respect of tape recorders and reproducers from Rudman Darlington & Co. and Rudman Darlington (Electronics) and Mr. Cunningham-Sands will be technical manager of the Reflectograph Division of Multimusic.

G. M. Ettinger, M.Sc., has left the English Electric Company, where he has been since 1955, to become engineer-in-charge of the recently formed engineering group of Marconi Instruments which will be concerned with general and nucleonic research, semi-conductor applications and technical liaison with other research organizations. After obtaining his electrical engineering degree at London University, Mr. Ettinger was awarded a Fulbright Fellowship for post-graduate work at New York University and Columbia University, New York, and subsequently joined R.C.A.



G. M. ETTINGER.



E. G. ROWE (See "Honours").

Three new directors have been appointed to the board of the Decca Navigator Company: **Graham L. Coles,** who in 1946 joined the marine sales staff on leaving the Royal Navy and has been manager of the company's marine division since 1947; **George Hawker,** B.Sc., who joined the company's systems planning division on leaving the R.A.F. in 1946, becoming head of the division in 1950 and since 1951 has been commercial manager; and **Herbert C. Lambert,** chief accountant of the Decca group, who also becomes group controller.

S. J. H. Stevens, B.Sc.(Eng.), A.M.Brit.I.R.E., has been seconded for three years from the Ministry of Supply to SHAPE (Supreme Headquarters Allied Powers, Europe) where he will join the signals group and be concerned with forward scatter equipment. For the past seven or eight years he has been in the electronics production (air) section of the Ministry working on airborne communications. As mentioned elsewhere he has been elected to the council of Brit.I.R.E.

OBITUARY

Dr. Alexander Meissner died on January 3rd, aged 74. He was born in Vienna and educated there in electrical engineering and machine design. From 1907 he worked for the Telefunken company in the early development of quenched spark transmitters. He will, perhaps, be best remembered for the regenerative valve oscillator circuit which bears his name and which he developed from 1913 onwards. After 1930 he worked in the research department of AEG and his interests once again turned to heavy electrical engineering. He received many honours from universities and the learned societies.

Frederick George Creed, inventor of the Creed teleprinter, died on December 11th at the age of 86. Born in Nova Scotia, he came to this country in his late twenties, bringing with him the idea for his system of telegraphic printing.

HONOURS

Among the recipients of awards in the Queen's New Year Honours List were the following:—

William R. J. Cook, C.B., deputy director, Atomic Weapons Research Establishment, Aldermaston, who receives a knighthood.

Dr. Harry W. Melville, secretary, Department of Scientific and Industrial Research, who is appointed a Knight Commander of the Order of the Bath.

J. E. S. Cooper, C.M.G., assistant director, Government Communications Headquarters, becomes a C.B.

Major-General W. R. C. Penney, C.B., C.B.E., D.S.O., M.C., lately director, London Communications Security Agency, is promoted Knight Commander of the British Empire.

E. H. Ball, managing director, British Thomson-Houston; **V. A. M. Hunt,** director, Civil Aviation Control and Navigation Directorate, Ministry of Transport and Civil Aviation; **J. A. Mason,** M.M., manager and director, Automatic Telephone and Electric Co., and a director of British Telecommunication Research; **C. Metcalfe,** managing director, E.M.I. Electronics; **J. C. R. Proud,** O.B.E., director of broadcasting, Cyprus; and **M. J. L. Pu'ling,** O.B.E., controller, Television Service Engineering, B.B.C., are appointed C.B.E.

W. J. Challens, senior superintendent (weapons electronics), Atomic Weapons Research Establishment, Aldermaston; **Lt.-Col. E. N. Elford,** T.D., manager, radar division, Marconi's; **R. G. Fall,** senior signals officer, Civil Aviation Telecommunications Directorate, Ministry of Transport and Civil Aviation; **R. A. McMahon,** secretary, British Electrical and Allied Industries Research Association; **H. K. Robin,** chief engineer, Communications Department, Foreign Office; **E. G. Rowe,** chief valve engineer, Standard Telephones and Cables; and **Wing Cdr. E. M. Smith,** M.B.E., chief executive officer, Foreign Office, Government Communications Headquarters, become O.B.E.

T. D. Fookes, civil aviation communications officer, Air Traffic Control Centre, Uxbridge, Ministry of Transport and Civil Aviation; **J. A. Leith,** engineer-in-charge, B.B.C. Westerglen station; **D. W. Rae,** 1st radio officer and purser, s.s. *Pyrrhus*; and **J. O. C. Whelans,** production engineer, Mullard Radio Valve Company, are appointed M.B.E.

OUR AUTHORS

John Gray, B.Sc., M.I.E.E., who reports on the training of technicians in electronics in an article in this issue, was head of the engineering department at Paddington Technical College from the end of the war until being appointed to his present position as principal of the College of Electronics in the Royal Radar Establishment at Malvern. He graduated at London University in 1928 and after some time in industry went to the Borough Polytechnic, London, as senior lecturer in electrical engineering. During the war he was in the Royal Navy working on degaussing and allied problems.

H. J. F. Crabbe, who describes a folded corner horn in this issue, has been senior technician in the department of phonetics at University College, London, for three years. He is engaged in research on the analysis and synthesis of speech and allied acoustic subjects. Prior to joining the College he was for five years in the final inspection department of Decca Radar which he joined after national service spent in the R.E.M.E. working on anti-aircraft radar equipment.

J. C. Muller, B.Sc.(Eng.), author of the article on pulse-type frequency measurement on page 83, took a graduate apprentice course with the G.E.C. after obtaining his engineering degree at the University of Witwatersrand, Johannesburg, in December, 1955. He recently returned to South Africa to take up an appointment for the company in the Union.

Training Technicians in U.S.A.

THE PATTERN OF RADIO AND ELECTRONICS EDUCATION IN AMERICA

By JOHN GRAY*, B.Sc., M.I.E.E., A.M.I.Mech.E.

DURING a semi-private visit to the U.S.A. in the summer of 1957, advantage was taken of the opportunity to visit various firms and colleges specializing in electronic work. It is not claimed that the investigation was exhaustive, because only about six firms and six colleges were visited These, however, were situated in such different and widely separated places as New York, Brooklyn, New Jersey, Washington D.C., Philadelphia, St. Louis, Chicago and Milwaukee. It is considered, therefore, that a fairly representative picture was obtained of the training facilities for electronics technicians.

General Education.—This follows the same general pattern as the English educational system between the ages of 5 and 18 years. Under the American system children attend primary schools up to about 10 years of age, then junior schools to 14 years and finally two or four years of high school. They may leave school at 16 years and take a job, but most of them stay up to 18 years of age. In these final two years there is opportunity for vocational training in the electrical or mechanical trades, or they may continue their general education in readiness for college. There is no 11+ exam. and no nation-wide examination similar to our General Certificate of Education, taken at 16.

The high schools maintain a fairly good standard. They have the usual terminal examinations, and the school leaving examination, which is taken at 18, is about equivalent to our G.C.E. Ordinary examination. Each school awards its own diploma.

Technical Education.—About one quarter of the boys leaving a technical high school at 18 go on to a college and study on a full-time 3-year course for a B.A. or B.S. degree.

The boys who have had the vocational training, between 16 and 18 years of age at the high school, may get a job in the appropriate trade and will be immediately useful. They may increase their technical knowledge by attending evening classes and by the time they are 21 they should have become skilled tradesmen.

For the more technical work in heating, refrigeration and air-conditioning, automobile repairs and, more particularly, radio and TV servicing or electronics, young men find it necessary to take an intensive day course of about 2 years' duration. Most of these young men, aged 18-22 years, have to do part-time jobs at local factories in order to support themselves and to pay their fees.

Many of the technical schools arrange attendance from 7 a.m. to 1 p.m. or from 2 p.m. to 8 p.m., so that students may put in a 5-day college week, amounting to 30 hours, and still work locally. Some evening classes are offered (7-9.30 p.m.)

None of the colleges visited was maintained by the local municipality or State. Some were private colleges run for profit but others were supported by large local firms or endowed and run on non-profit-making lines. Fees in the non-profit-making colleges were from $120 for an 18-months course, but in the private colleges some of the fees were as high as $1,200 for a similar course.

Radio and TV Servicemen's Course.—Most of the colleges offered an intensive 12-months course suitable for radio and TV Servicemen. The students spent most of this time on commercially made domestic receiver chassis, familiarizing themselves with the circuits and locating and rectifying faults with the aid of standard test equipment. Formal theory lectures were cut to a minimum and very little mathematics and physics was studied.

Junior Electronics Technicians' Course.—In the extended courses of 18-months duration, the technical principles were dealt with more fully, some calculation work was covered and lectures given on related topics in light and sound. Men qualifying from this course readily find posts as junior technicians on the installation and maintenance of electronic equipment in broadcasting or industry. The course is widened to include telecommunication transmitters and industrial electronic equipment.

Senior Electronics Technicians' Course.—At some of the better colleges, this course was of 24-months duration and embraced most of the application of electronics such as broadcast transmitters and receivers, radar and industrial equipment. A very thorough treatment of fundamentals was given including mathematics up to differential equations, and topics in physics related to electronics were similarly treated. A number of colleges were able to devote a small amount of time to engineering drawing, technical English and social studies.

Some of the colleges are authorized to award Associateships in Applied Science (Electronics) to successful students on this course. This award has the backing of State education authorities and is recognized by professional bodies and industrial firms. Men qualifying from this course will undoubtedly be able to fill posts as senior electronics technicians in telecommunications or industry.

At the Milwaukee School of Engineering, the students are able to take an initial 1-year course in electronics and then pass on to a 2-year course dealing with a wider variety of subjects, roughly equivalent to parts 1 and 2 of a British engineering degree course. A very thorough treatment of fundamentals was given. This school is authorized to award a Bachelor of Science (B.S.) degree to successful students. A 2-year day course was available as a 6- or 7-year evening course at the same overall cost.

Graduate and Post-Graduate Courses.—These must be considered to be outside the scope of the present investigation as none of the large universities such as the Californian Institute of Technology or M.I.T. was visited; but it happened to be convenient to call in at the Brooklyn Polytechnic where, in fact, very sound courses for B.S., M.S., and Ph.D. degrees were in operation.

Bell Telephone Laboratories had an interesting scheme for their new graduate employees. New

* College of Electronics, Royal Radar Establishment, Malvern.

graduates were appointed on full salary as junior engineers or scientific officers. In their first year, they could attend lectures on three days per week in post-graduate mathematics and physics and specialist courses on such topics as semiconductors, computers and control systems. Some of the lectures are given by visiting university lecturers, others by senior engineers of the Bell organisation. On the other two days of the week, graduates obtain practical experience in the research or development laboratories and spend a few months in each of a number of departments.

In their second year, they could continue to attend a few lectures but, by this time, they were expected to have shown an aptitude for the work in a particular department and were kept there to do a worthwhile job.

Conditions in Colleges. Most of the larger colleges had about 4,000 day students. About 50 per cent of these complete and pass the short 12-month elementary courses and about 25 per cent the more advanced 2-year courses.

The colleges are having a difficult time in their competition with industry for suitable men to act as lecturers or instructors. The lecturers are mostly university graduates, some with useful industrial experience, who can lecture on advanced fundamental theory and mathematics. The more elementary lectures are given by instructors who have extensive practical experience of electronic equipment and a fairly sound knowledge of underlying principles; these instructors also supervise in the laboratories. In the larger colleges, a member of the staff acts as student councillor or adviser. He spends all of his time watching the progress of individual students, advising them, and helping to place them, when qualified, in suitable posts.

There do not appear to be any nationally recognized salary scales for technical lecturers, and salaries and conditions of service seem to be a matter for direct negotiation between individual lecturers and the Principal or Director of the college.

Buildings. None of the technical colleges visited was controlled by the local municipality or state, and the type of buildings and equipment provided was influenced by the degree of local endowment.

Some of the smaller colleges are housed in converted shops or commercial premises but the larger and more prosperous ones have been able to have large new buildings. Most of the colleges were situated in built-up areas and none had the spacious grounds or campuses seen in American films.

Equipment. Most of the smaller colleges with a bias towards radio servicing made use of a large number of used radio and television receiver chassis with a reasonable amount of test equipment such as signal generators, multi-range meters and oscilloscopes.

Those colleges doing more fundamental work in advanced electronics make more use of "breadboard" circuits made up from components by some of the students and laboratory instructors. This was supplemented by adequate commercial test and measuring equipment.

The more prosperous colleges have spent large sums of money in elaborate commercial equipment such as complete sound and vision transmitters, and specialized industrial electronic equipment. Many of the colleges are using the special Philco electronic circuit demonstration equipment, but more thought might have been given to the devising of other special demonstration equipment to illustrate fundamental principles during lectures.

There was little equipment suitable for microwave experiments or to demonstrate auto-control or servo-mechanism principles, but it was understood that some of the colleges intended to set these up.

It seemed that more thought might have been given to the efficient planning of the layout and power supplies to the laboratories. The electrical machine labs, in particular, were rather old-fashioned compared with many British colleges.

Amenities. None of the colleges visited had hostels for resident students, but lists of suitable lodgings were kept and students directed to suitable accommodation. The larger colleges had canteens run on the self-service system, where students could get light refreshments from early breakfast to evening meals. Nearly all of the colleges had large pleasant common rooms and smaller club rooms. The students had organized themselves into Student Unions and various recreative clubs.

Practical Training. At the end of their 2-year electronics course successful students are able to get jobs, quite readily, as junior technicians in electronics firms. They acquire practical experience in the course of their routine work and if they vary their experience sufficiently they can become experienced senior technicians in the course of a few years.

None of the firms visited was running formal apprenticeships in electronics or undertaking the responsibility of a full training scheme. There was no part-time day release, but some firms would refund fees to junior employees who were successfully attending evening technical courses.

Some firms were running normal apprenticeship schemes on a small scale for toolroom craftsmen. Apprentices were recruited at 16 years of age and given initial practical instruction in a training bay in the main toolroom. Later, they work under experienced craftsmen in the main toolroom. During the 5-year apprenticeship, the apprentices are required to attend evenings classes in appropriate subjects at the nearest technical college and fees are refunded by the firm to successful students.

Conclusion.—The normal pattern for a young man wishing to train as an electronics technician appears to be as follows.

First, a general education in ordinary and technical high schools up to the age of 18. Second, a fairly arduous full-time two-year theoretical course of study on electronics at a technical institute. Third, a junior technician's post in a firm, in which he picks up practical experience on his routine work.

As the students have to pay their own way during that two-year course, they are very conscientious with their studies, but the nature of the arrangement must be a considerable strain on them, financially and otherwise.

They receive very little formal *practical training* before taking a job. This can hardly be as satisfactory as the British Apprenticeship scheme, whereby a young man receives a formal graded practical training in various aspects of electronics before he settles in a particular job.

The American system has its faults but, in spite of these, it is turning out large numbers of electronics technicians who are able to undertake high-grade work in industry.

DESIGN FOR A
Folded Corner Horn

By H. J. F. CRABBE

Low-frequency Unit with a Response Down to 40 c/s

WHENEVER audio enthusiasts get together, the subject of loudspeaker loading at low frequencies inevitably arises and the advantages of this, that and the other conflicting system are zealously proclaimed. Usually, however, the protagonists will unite in agreeing that an exponential horn provides the ideal method of loading a cone loudspeaker, but that the sheer physical size of the system makes it quite inapplicable to domestic conditions. Nevertheless, excellent aural results can be obtained from structures of quite moderate dimensions. It is the purpose of this article to describe the design and construction of such a practical corner-mounted bass horn to provide a smooth response at high efficiency down to 40 c/s when driven by an 8-in speaker.

Advantages of Horn Loading.—First it may be helpful to review briefly the reasons for the superiority of the horn as a method of loudspeaker loading. Considered as an acoustic power generator a cone loudspeaker has a complex source impedance which is primarily reactive, with a major inductive component (the cone mass) in series with a capacity (the suspension compliance). For an optimum transfer of power to take place, the load should consist of an acoustic resistance equal to the total acoustic reactance of the speaker. The impedance offered to a cone by an unrestricted volume of air is but a minute fraction of this optimum load; and in the simple case of a unit mounted in an infinite baffle the air load is not only very small but at low frequencies almost purely reactive. The problem is how to modify this low air impedance so as to present the speaker cone with the high resistance independent of frequency which is necessary for efficient working. The various types of vented enclosure usually provide loading which approaches the optimum at one frequency only, i.e., they are resonant. Within its pass band an exponential horn behaves like a simple acoustic transformer which converts the low resistance of the free air at its mouth into a high resistance at its throat, the smaller the throat the higher being the resistance. Thus, by choosing a suitable size of throat, it is possible to obtain the correct load for any speaker, thereby greatly increasing its efficiency as a transducer. This increase in the efficiency also means that the actual cone excursion required to produce a given sound level is vastly reduced by a horn, so that uneven distribution of flux in the gap and non-linear suspension of the cone will contribute much less distortion to the output. Another great advantage of horn loading is that it results in heavy damping of the cone movement and consequent elimination of resonances. Amplifiers with a low output impedance are used to facilitate magnetic damping, but this is only effective at low frequencies, and the many minor resonances resulting from cone break-up which are only loosely coupled to the voice coil can only be reduced acoustically by a horn.

Horn loading is worth while at all frequencies and a number of speakers using the principle are available at reasonable cost for use at high and middle frequencies. However, the clarity and naturalness of the reproduction from these and push-pull electrostatic units are such as to underline the mediocre quality of most conventional bass reproducers. In the author's opinion a good bass horn of low cost which can be constructed by anyone with reasonable ability and enthusiasm would help to fill this gap. The problems involved in designing such a horn will now be considered.

There are three basic dimensions which must be established before a specification can be made for any horn. These are:—

(1) The rate of flare, i.e. the rate at which the cross-sectional area changes with distance along the horn axis.
(2) The area of the mouth.
(3) The area of the throat.

For a given rate of flare, (2) and (3) will automatically determine the length. Each of these factors will be considered in turn before proceeding to the practical design.

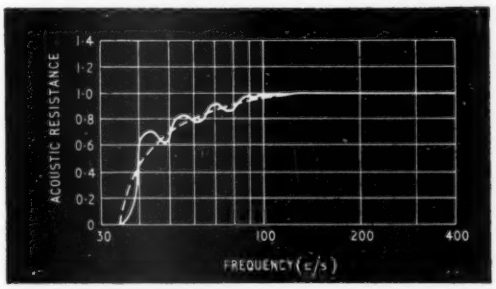

Fig. 1. Change of relative acoustic resistance with frequency at the throat of an ideal exponential horn (dotted line), and the same horn terminated at a mouth diameter of λ/3 (full line). The flare cut-off frequency is 35 c/s and the throat diameter 3 in.

Rate of Flare.—In addition to having the characteristics of a transformer, an ideal exponential horn behaves like a high pass filter, and the throat acoustical resistance into which the speaker looks takes the form shown by the dotted line in Fig. 1. The frequency at which the resistance has fallen to zero is the flare cut-off frequency (f_{co}), which depends on the rate of flare (the more gradual the rate, the lower the cut-off). It is obviously necessary to arrange that this comes below the lowest frequency the horn is required to handle, and it may be assumed that this latter is 40 c/s as only the very deepest organ

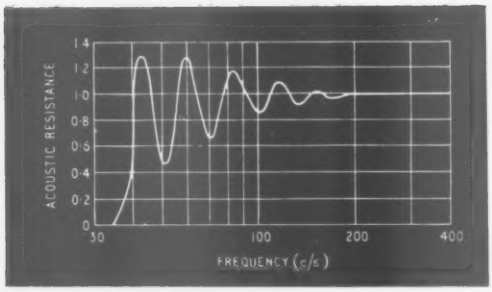

Fig. 2. Throat resistance of the horn of Fig. 1 when terminated at a mouth diameter of λ/5 (6.4 ft).

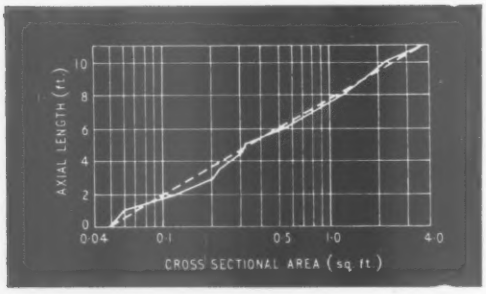

Fig. 3. Law of the proposed horn presented graphically. The ideal expansion (dotted) line may be compared with that of the practical shape (full line).

pedal notes are likely to have any significant energy content below this. To achieve a sufficiently constant load on the speaker down to 40 c/s a cut-off frequency of 35 c/s is suitable. The rate of flare (α) can now be determined from the equation $\alpha = 4\pi f_{co}/c$ where c is the velocity of sound in air. This gives $\alpha = 0.4$ per ft.

Mouth Area.—The second major factor influencing the low frequency response of a horn is the degree of mismatch of acoustical impedance as the sound passes from the horn mouth into free air. Such a mismatch causes reflections back into the horn, and the resulting resonant modes create irregularities in the throat resistance. For the curve of Fig. 1 to remain completely unaffected, the horn mouth diameter[1] would have to be $4\lambda/\pi$, where λ is the wavelength at f_{co}. However, Olson[2] has shown that this ideal condition is almost fulfilled if the diameter is reduced to $\lambda/3$, and has confirmed this by measurements on an actual horn, the results of which may be compared with the ideal curve in Fig. 1. In practice, for low frequency horns, the mouth diameter may be even further reduced to $\lambda/5$, which for a cut-off at 35 c/s is 6.4 ft, corresponding to a mouth area of 32 sq ft. The resulting throat resistance curve (Fig. 2) looks rather alarming, but the maximum variation of acoustic resistance is only 3 to 1, and Olson[3] has shown that irregularities of 6 to 1 will cause variations of power output of only 2 dB down to just above the cut-off frequency, provided that the throat is properly matched to the driving unit.

The horn so far envisaged will radiate effectively down to 40 c/s into a solid angle of 4π, i.e., free space. A reduction of the solid angle into which the horn is required to radiate will raise the acoustic radiation resistance immediately in front of the horn mouth, and the area of the latter must be reduced in proportion to retain the original matching conditions. Taking a practical case, if the angle in front of the horn mouth is $\pi/2$ or an eighth of a sphere, then the 32 sq ft mouth area may be divided by 8 without adverse effects. In the corner of a room at floor level the solid angle is in fact an eighth of a sphere, so that a horn placed in such a position will work satisfactorily with a mouth area of 4 sq ft. The room walls should extend in an unbroken manner for several feet beyond the horn mouth, otherwise the effective solid angle in front of the assembly may be more than the eighth of a sphere mentioned above.

Throat Area.—The cross-sectional area of the throat depends on the size and type of speaker drive unit to which the horn will be coupled. In general, from the point of view of economy and the availability of speakers suitable for horn loading, an 8-in unit is probably the most satisfactory. As a rough empirical rule for speakers with light paper type cones, it has been found that optimum matching occurs when the throat area of the horn is equal to one quarter of the piston area of the cone. A nominal 8-in speaker usually has an effective diameter of 6 in, which gives a throat area of 7 sq in or 0.049 sq ft.

Specification.—The final theoretical specification for the horn may now be formulated.

(1) Rate of flare $\alpha = 0.4$ (per ft).
(2) Area of mouth $A_x = 4$ sq ft.
(3) Area of throat $A_t = 0.049$ sq. ft.

The length of the horn x can now be determined from the exponential horn equation $A_x = A_t e^{\alpha x}$. This gives $x = 11$ ft. The resulting flare is represented graphically in Fig. 3.

Folding the Horn.—In folding the horn so that



Fig. 4. Shape of the practical folded horn, showing the sound path from the small circular throat to the large quadrant shaped mouth.

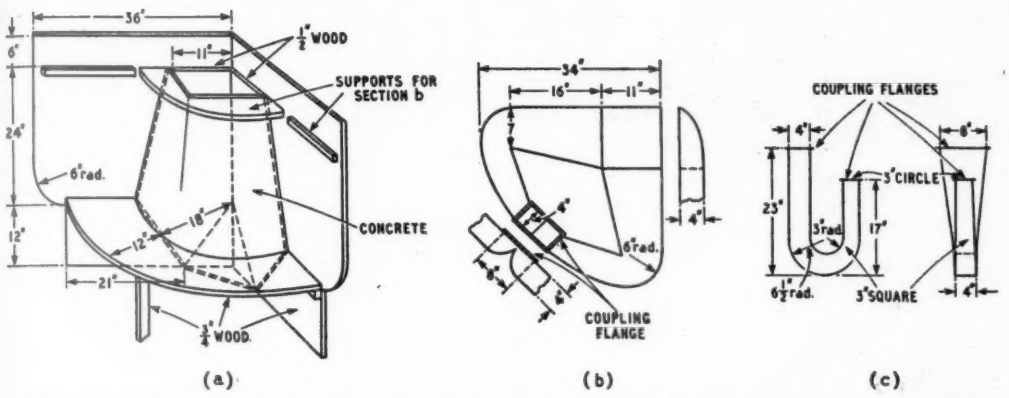

Fig. 5. (a) View of the main frame of the horn to which the final vertical section and the mouth are permanently fixed. (b) An underside view of the middle part, showing the square opening which feeds into the vertical section, and the small rectangular opening which couples to the "J"-shaped section. (c) Two views of the "J", or throat, section.

it will stand conveniently in the corner of a room the following four requirements must be borne in mind.

(1) The mouth must be at floor level and should extend through 90° from one wall to the other to ensure proper matching into the room.

(2) The throat must be positioned so that the back of the speaker unit may be easily coupled to it, leaving the front of the cone free to radiate into the room at middle and high frequencies either directly or via a short horn.

(3) The horn must be folded sufficiently to avoid an excess of waste space in the total structure.

(4) The number of bends must be restricted to the absolute minimum in order to have the advantages of horn loading well into the region where the maximum energy levels occur in orchestral music, i.e., 200 to 500 c/s. This restriction arises because the wavefront travelling through a folded horn becomes bent in such a manner that, above a certain frequency, out-of-phase cancellation effects take place, and the response tails off in an erratic manner.

Requirements (1) and (2) are basic and determine the overall structure; whereas (3) and (4) conflict and a compromise solution is necessary. With the above factors in mind, a practical shape has been evolved (Fig. 4) whose expansion law approximates reasonably to the theoretical flare, as will be seen from a comparison of the two in Fig. 3.

Method of Construction.—To construct such a horn with sufficient mass and rigidity to avoid vibration and mechanical resonance is a difficult problem. After consideration of numerous alternatives, it was finally decided to use half-inch thick concrete for most of the structure; and only employ wood or composition board near the mouth where the acoustic pressures are relatively low.

The horn divides conveniently into three sections which may be taken apart for transportation; the details of the structure are shown in Fig. 5. It will be noticed that the bottom surface of the mouth is not included as this is provided by the floor of the room in which the horn stands. The detachable sections (b) and (c) are assembled by bolting together the drilled metal coupling flanges. Some sort of permanent mould or reinforcement is necessary for the hollow concrete sections, and it is convenient to make this of 26 s.w.g. tinplate which can be easily cut, bent and soldered. This tinplate constitutes the inner surface of the horn, and all the dimensions of the concrete parts given in Fig. 5 are for the tinplate shapes. To ensure that the concrete keys firmly on to the metal, strips of perforated zinc to protrude ⅜ in are soldered on to the surface in a zig-zag fashion so that no point on the tinplate surface is more than 2 in from a place which will be firmly anchored into the concrete.

For anyone not a skilled plasterer the task of applying an even layer of concrete half an inch thick to the somewhat odd shapes requires a great deal of patience, and has to be done in easy stages. A mixture of one part of cement to three of sand is suitable. The sections should be left for several days to dry out thoroughly. The tiny cracks which appear must all be filled before the horn is assembled. Should the concreting process prove too tiresome, a little light relief is permissible on the final vertical section of the horn attached to the main frame, where a 1-in thick sand-filled panel made with hardboard bent to the required shape is adequate.

Assembling The Horn.—The main frame should be fixed firmly into position, and strips of felt stuck on the horizontal supports for section (b) (Fig. 5). This latter is then hoisted into position. It will be found that its centre gravity lies in front of these supports so that its weight is only completely held when the J-shaped section (c) is finally in position.

The inevitable inaccuracies of the parts make a certain amount of padding and packing necessary in the assembly process, but this may be left to the individual ingenuity. Where the three concrete sections join it is essential to seal completely the cracks with a filler, as quite minor leaks will drastically upset the performance at low frequencies. For constructors with young children, Plasticine will no doubt be readily available, and is very suitable for this operation. Finally, the front of the horn should be boarded up as in Fig. 6 to make the transition from mouth to room less sudden and consequently improve the matching. When this boarding up is done the resulting cavity around

Fig. 6. The author's completed system with its decorative cover removed.

the J section must be stuffed with acoustically absorbent material to prevent it ringing. Screwed up newspapers tightly packed are very suitable for this purpose.

Choice of Loudspeaker.—It will be found that the horn enhances the low frequency efficiency of an 8-in speaker so greatly that if one unit is used to cover the whole range the balance may be upset in favour of the bass. Therefore in many cases the best approach would be to use a separate unit (preferably horn loaded) for the middle and high frequencies, and any moderately good 8-in unit in the horn for the bass. A little intelligent juggling with the cross over component values and speaker impedances should equalize the efficiencies. The four-to-one ratio of cone to throat area mentioned earlier is relevant to a light cone of the type found on the average 8-in unit; the heavy cones fitted to many bass reproducers require a larger ratio for optimum matching, and because of this a 10-in or 12-in speaker of this type would be as suitable as a normal 8-in unit. In either case the speaker should have a fairly rigid cone without graded compliances, and the edge suspension should be sufficiently free to ensure a low resonant frequency, say below 50 c/s.

Another alternative (adopted by the author) is to use a single very high flux twin cone unit of a type designed specifically for horn loading; and to balance the low frequency efficiency provided by the main horn, at middle frequencies by means of a short straight horn (described later) coupled to the front of the speaker; and at high frequencies by the increase in the radiation from the small inner cone. Although such a speaker is expensive, the cost should be compared with that of two medium-priced units and a cross-over network. The end of the short middle-frequency horn may be seen in Fig. 6.

Fitting the Speaker.—As has been mentioned earlier, the low-frequency horn will not transmit sound effectively above a certain frequency because of the folds in its length. In this case the angle of the bend nearest the mouth is 90°; and the criterion is that when the diameter of the horn at this bend is equal to $\lambda/2$ the first dip in the response will occur[4]. The effective diameter at the final bend is approximately 1.4 ft, which means that a dip will occur at about 400 c/s. The coupling between the speaker and horn throat should therefore be designed so that the energy transmitted through the horn falls away rapidly above, say, 350 c/s. This is achieved by placing a cavity between the cone and throat which acts as an acoustic capacitance, and shunts the horn resistance above the chosen frequency. In addition, this cavity removes the mechanical restriction on the cone movement imposed by the low frequency horn throat resistance, and allows the short horn on the front of the cone to take over efficiently at middle frequencies. This arrangement provides an acoustic equivalent of a conventional cross-over circuit.

The volume of the cavity must be such that its acoustical reactance equals the acoustical resistance of the horn throat at 350 c/s. Within its pass band the throat resistance of an exponential horn is $\rho c/A_t$ where ρ, c and A_t are the density of air, the velocity of sound, and the cross-sectional area of the throat respectively. The reactance of an acoustical volume capacitance is $\frac{c^2}{2\pi f V}$, where V is the volume and f the frequency. This gives $\frac{42}{45.2} = \frac{1.43\times 10^6}{700\pi V}$, where V is in c.c.

Therefore V = 700 c.c. or 42.6 cu in.

On many 8-in. speakers the volume of air between the rear of the cone and the frame is approximately 40 cu in; and with these the simplest method of coupling to the horn is to seal off this cavity, leaving one opening suitably placed for fixing to the horn throat. Whatever arrangement is used it is essential that any extension to the throat should maintain the cross-sectional area of 7 sq in right up to the cavity. The author has found that if the point of entry of the throat into the cavity is placed asymmetrically with respect to the speaker axis, the cavity tends to behave like a Helmholtz resonator, and produce audible coloration of the output. The way to overcome this is to couple the throat coaxially as in Fig. 7.

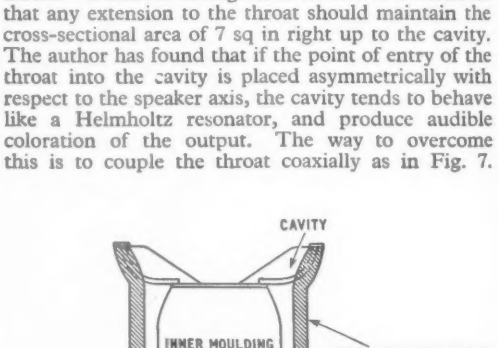

Fig. 7. Sectional view of the speaker mounting showing the method of extending the horn throat area up to the cavity at the rear of the cone.

The dimensions of the moulding on and around the magnet will obviously depend on the individual speaker unit, but shapes of this sort can easily be made with plaster of Paris, and set quickly in removable cardboard moulds.

Despite the attenuating effect of the cavity, a certain amount of high frequency energy will still travel through the horn and may colour the output. As a final precaution against this, a further low pass filter may be added in the form of a cloth diaphragm at the throat. The fitting of this is not critical, and it has been determined experimentally during listening tests that two layers of medium thickness woolly cloth material are sufficient to remove all audible effects. The position of the diaphragm is shown in Fig. 7.

When the resulting speaker-plus-coupling unit is fitted to the horn, it will be found that the speaker cone lies several inches below the top of the middle concrete section. This is deliberate as the space is used to accommodate the throat end of a short middle-frequency horn, thus reducing the overall height of the final assembly. If the second horn is not fitted, the speaker should be mounted flush with the top of the structure and the main horn throat extended upwards appropriately. It is not necessary to continue the flare taper when this is done, as this would not cause the cross-sectional area to change very much in a few inches.

The upward facing arrangement of the cone causes a wide dispersion of sound at middle frequencies which is very pleasing when reproducing orchestral music. The attenuation, which would otherwise be suffered by very high frequencies through being beamed straight up at the ceiling, should be avoided by fixing a small elliptical metal plate above the cone to reflect the beam back into the corner of the room, from where it will be reflected forwards in a more horizontal plane (see Fig. 8). The back of this reflector can be coated with Plasticine to avoid any possibility of ringing.

Middle-Frequency Horn.—To achieve a satisfactory performance, a middle or high-frequency horn must approach the ideal much more closely than one for low frequencies only. This means in practice that it must have a straight axis, and its mouth diameter must be at least $\lambda/3$ at the cut-off frequency. Failure to fulfil this last requirement is the primary cause of the coloration for which some horn loudspeakers have a reputation.

The cut-off frequency of the short horn must be chosen so that it begins to load the front of the speaker cone just as the rear cavity starts to shunt the throat resistance of the main horn. In the absence of the short horn the output from the bass horn begins to fall above 330 c/s, so an f_{co} of 325 c/s seems about right for the small horn. Using the equation given earlier this gives a rate of flare (α) of 0.304 per in.

Ideally, the throat area of the short horn should be smaller than the cone area as in the main horn. However, with an 8-in speaker, it is then almost impossible to devise a form of coupling which will distribute the load evenly over the cone area and at the same time avoid irregularities of response due to path length differences and cone break-up. In practice it is sufficient to make the throat area equal to the piston area of the cone. This is quite an efficient arrangement at middle frequencies, because, even in the absence of a horn, when the cone is an appreciable fraction of a wavelength in diameter, the resistive component of the air load becomes predominant. With a horn, acoustic damping of the cone movement is also provided.

To avoid standing wave effects between parallel surfaces, it is preferable to make the horn with a circular rather than rectangular cross-section. A mouth diameter of 14 in corresponds to $\lambda/3$ and is probably adequate, but the author has gone to 22 in to be completely safe. This results in an axial length of 8 in, the first 5 in of which is accommodated below the top of the main assembly. Fig. 8 shows the sort of arrangement required; the end of the short horn may be seen in the photograph (Fig. 6).

The horn can easily be made by sticking together a succession of cardboard cones of appropriate angle and coating the resultant shape with approximately one inch of plaster of Paris. The shape at the throat will depend on the speaker unit, but should be arranged to come within $\frac{1}{8}$ in of the cone, and to stand securely without leakage on the speaker

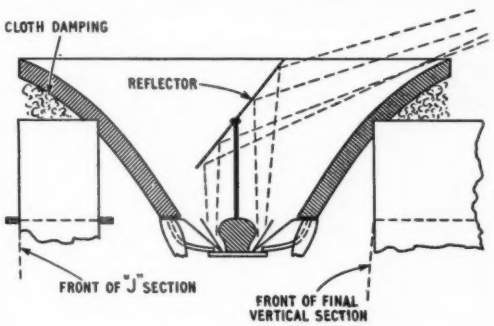

Fig. 8. Sectional view of the short middle-frequency horn showing its relation to the cone and main horn structure. The position and angle of the metal reflector are also shown.

frame under its own weight. The china-like quality of the plaster and the annular shape of the horn mouth combine to produce a slight mechanical resonance, so that the topmost few inches of the horn should be bound on the outside with cloth or rope to prevent ringing.

The central "bung" attached to the magnet pole in Fig. 8 is an attempt to achieve some degree of horn loading on the apex of the cone from which the very highest frequencies are radiated. It is shaped so that the area between it and the inner cone expands exponentially. This refinement is now fitted by the manufacturers of the unit used by the author.

Frequency Response.—Objective measurements of the performance of any loudspeaker are bound to be very difficult under domestic conditions. This applies particularly to the frequency response which can be completely distorted by room acoustics. Since the present speaker must by definition stand in a corner, the use of an anechoic chamber for measurements is out of the question. Fortunately the room in which the author's model stands is of irregular shape, has a varying ceiling height, and most of the walls are of the plaster partition variety, all

of which results in a very marked lack of reverberation at low frequencies. In these circumstances a subjective assessment of the frequency response is not completely valueless. With a constant input from a low impedance amplifier source, the radiation from the main horn mouth extends smoothly with no audible peaks or dips from 300 to 40 c/s, below which it falls away rapidly. Above 300 c/s the short horn progressively takes over with no change of level or quality in the total output, the frequency at which the sound is divided equally between the two being 330 c/s. It is impossible to detect any frequency doubling at 40 c/s even at very high input levels.

With the short horn removed, the cross-over frequency changes to 370 c/s and is less sharply defined. The efficiency in the 500 to 1,000 c/s region is also somewhat lower.

Damping.—Next to the increase of efficiency the most noticeable effect of horn loading on a cone speaker is the virtual removal of the major cone resonance, and this change can be most dramatic. Units which have an impossibly boomy and coloured bass response in more conventional enclosures give a very good account of themselves in this horn. As an extreme example a "cheap and nasty" speaker with the major resonance at 250 c/s was coupled directly to the horn throat. Despite the unity ratio of cone to throat area and the consequent mismatch, the resulting bass was smoother than much that passes for "hi-fi" elsewhere. Moir[5] has demonstrated the deleterious effect on amplifier performance of a load which varies widely with frequency, and has shown that the damping of the cone resonance afforded by a horn is accompanied by a corresponding flattening of the electrical impedance curve. Fig. 9 shows the impedance characteristics of two speakers in the horn and unmounted. It will be seen that when the resonance occurs well within the pass band of the horn it is damped completely out of existence, and when it is below the horn cut-off it is reduced in both amplitude and frequency.

A basic criterion for high acoustic damping in any loudspeaker system is that its transient response shall be independent of the source impedance feeding it. One very simple test for checking this is alternately to short and unshort a 1½-V cell across the speaker coil. This applies step functions alternately at very low and at infinite impedance respectively, and the resulting click sounds should be indistinguishable from one another. They are in fact identical with this speaker.

Efficiency.—In the absence of proper measuring facilities one can only guess at the overall electro-acoustic efficiency of the system. As a first step the peak electrical power fed into the speaker was measured when reproducing orchestral music. The method recently suggested by Baxandall[6] was used, and the sound level at times was very high indeed. The peak power reached was ½ watt, and that only very rarely. The vast majority of very loud climaxes did not exceed ¼ watt, and for most music most of the time a 100 mW peak power was adequate for realistic reproduction. Hopkins and Stryker[7] have developed a method of relating the subjective loudness needs of the listener to the maximum amplifier power required, for speakers of various efficiencies in rooms of various sizes. Their table shows that for realistic reproduction of a 75-piece orchestra in a room

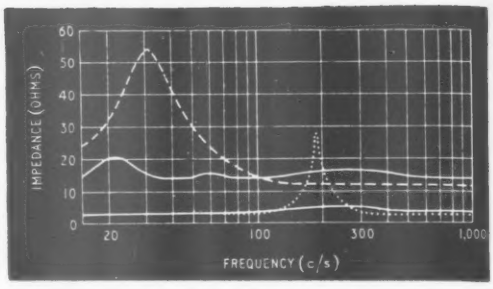

Fig. 9. Electrical impedance curves of two speakers, in the horn (full lines) and unmounted (dotted lines).

of 1,500 cu ft a maximum power of ¼ watt corresponds to a speaker efficiency of 40%. This seems about right in view of the high flux drive unit used. With more moderately priced speakers it should still be possible to achieve low frequency efficiencies of up to 15%, which would mean very modest amplifier requirements for domestic use. Indeed, economies in this direction could more than cover the cost of building the horn.

Subjective Listening Tests.—The final judgment of the quality of any loudspeaker system must be the subjective one of music-lovers, and numerous members of this species have listened to the horn described in this article. Attention has been directed to the low frequencies which are a function of the horn, rather than the high frequencies which depend on the type of drive unit used.

The general view seems to be that the bass is smooth and clean with a complete absence of coloration or resonance, transients are very clear, and when the full orchestra is playing a loud passage all the low frequency detail is preserved. The reproduction has an exceptionally solid and firm sound. There is great depth in the bass only when there should be. The sort of deep and impressive "glow" added by some speakers whenever the music is loud (possibly caused by excitation of the major cone resonance) is not a characteristic of this system; neither is it a characteristic of an orchestra in the concert hall.

Possibly the most important single requirement of a speaker is that discriminating listeners can live with it. The author has lived with his with increasing satisfaction for over a year, a test which numerous previous set-ups have failed to pass.

Finally the author would like to acknowledge the invaluable help of J. E. West and R. H. Clayton in designing the folded horn shape, and to mention that they have also constructed prototype models with equal success.

REFERENCES

[1] A. Wood, "Acoustics" (Blackie), p. 120.

[2] H. F. Olson, "Acoustical Engineering" (D. Van Nostrand and Macmillan), Fig. 5.10D, p. 111.

[3] H. F. Olson, "Acoustical Engineering" (D. Van Nostrand and Macmillan), p. 220.

[4] L. L. Beranek, "Acoustics" (McGraw-Hill), p. 279.

[5] J. Moir, *Wireless World*, Vol. 57, July 1951, p. 254.

[6] P. J. Baxandall, *Wireless World*, Vol. 63, April 1957, p. 170.

[7] H. F. Hopkins and N. R. Stryker, *Proc. I.R.E.*, Vol. 36, March 1948, p. 315.

U.H.F. IN U.S.A.

HOW ONE SERVICEMAN CONTRIVED TO STAY HAPPY ON THE HIGH BANDS

*By JACK DARR**

SOME little time ago, the Powers That Be in Washington got together for a potlatch, an indaba, a punchayet and a pow-wow, (with apologies to Rudyard K.) and decided that the TV men were having much too easy a time of it.

"What could we do to stir 'em up a bit?" asked one. "They're getting fat and lazy, and making entirely too much money!"

"Indeed," agreed another of the patriarchs. "Why, if you'd seen what that man charged me last week for only —."

"Gentlemen!" rumbled the Chair, frowning. "We mustn't let personal feelings enter into this! The problem before this Committee at present is co-channel interference, lack of available channels, and overcrowding in general. Do I hear any suggestions?"

"If I had my way," said one member, "I'd assign a u.h.f. band, say from 470 to 890 megacycles to TV broadcasting."

"Ah, yes," smiled the Chair, "that might solve *all* of our problems. Not only shall we have given the broadcasters more lebensraum, but we shall have taken a good wipe at some of those servicemen. When I think of all the trouble they're going to have I just want to —." At this point, the Chair became quite overcome with joy, and was led off, still chortling, to apply restoratives.

The preceding fabulous version may suffer from a certain lack of verisimilitude, but in one form or another some such vision must have arisen in the minds of the American TV men when they first encountered this new band of frequencies.

These were known as the Ultra High Frequency channels, although different versions have been circulated: one disgruntled technician, after hours of probing a roof for a non-existent signal, claimed they stood for "Up Here Forever," while another, attempting to get sufficient signal a few miles away from the station, held out for "Unusable Here in Fringe." There have been others, but this must pass through the mails!

Technical difficulties abounded in the early days of u.h.f. transmissions, not only among the receiving gentry, but among the transmitting types as well. The nation's first u.h.f. station, in Portland, Oregon, ran headlong into some of these: although reception of the signals was excellent a few miles out, not a set in the city proper could receive the station! Investigation revealed that the transmitting antenna partook of some of the characteristics of a lawn-sprinkler: the signal was being "squirted" well out into the outskirts, but the area immediately surrounding the "sprinkler" was quite dry! (This was finally remedied by tilting the antenna, so as to bring the signals down into the city itself!)

Propagation Characteristics of U.H.F. Signals.—As in v.h.f. broadcasting, many of the tightly held pre-conceived notions about the nature of the signal path, line-of-sight transmissions, and so forth, were proved to be slightly in error, after a few months of field testing. With the much higher frequencies, it was assumed that reception would be truly line-of-sight, with no bending at all, and it was feared that there would be great difficulties with reflections and ghosts.

Practical experience has proved some of these assumptions true, some false. As in v.h.f. work, the "line-of-sight fallacy" has proven to be just that. Many instances of good reception in "impossible locations" have confirmed this, as will be discussed later. Ghosts and reflections are no problem; in fact, many technicians say that they are much less than at v.h.f.

Field Test Results.—A series of field tests made in primary, secondary and fringe areas brought forth some rather interesting results. The same antenna, a bow-tie with reflector, was used in all tests, together with an adjustable tower, to permit checking the actual field strengths at different heights. A field-strength meter was used in conjunction with a portable TV receiver, to check both picture quality and actual signal strength. To make the tests as accurate as possible, the same length of lead-in was used on all tests: the surplus was held away from the tower, off the ground, with a bit of dry string, thus making transmission line losses equal for all positions.

Several peculiarities were found during these tests, although not as many as had been anticipated. Several were made in places where local technicians had been complaining loudly of insufficient signal strength; these revealed that the major difficulty had been lack of antenna *height*, coupled with the use of improper antennæ, with too little gain. Most of these locations were from 40 to 50 miles away from the station, with a great deal of this distance being over water. This brought out two things: (1) that the outer edges of the fringe were much farther away than had been previously thought possible, and (2) that over-water transmissions suffered much less loss than a corresponding distance over land. One novel discovery resulted from tests at a medium distance location, where a fairly strong signal was expected, and a quite weak one received; checking the map disclosed a very large swamp exactly between transmitter and receiver, which led inevitably to the conclusion that the signal, like the famous "Chloe," had gotten lost in the swamp!

The presence of very tall trees between receiver and station also leads to trouble. It was found necessary in all cases to go above trees to get reliable signals. This in contravention to common experience with v.h.f., which suffers very little from

* Ouachita Radio-TV Service, Mena, Arkansas

"foliage attenuation." Even a large grove of pines, with their fine needles, caused quite a loss. Another source of excessive attenuation in the signal path was the presence of thickly populated areas, tall buildings, etc. Added antenna height was needed here.

Summing up, it may be said that no more difficulties were encountered than in v.h.f. work: provided, of course, that the proper antenna and other equipment are used, along with proper installation techniques. Distances worked were far in excess of those predicted, even by the most enthusiastic proponents of u.h.f. broadcasting.

U.H.F. Receiving Aerials.—Receiving antennæ for u.h.f. work are, of course, built to the same theoretical designs as those used by their big brothers on v.h.f. Many types are found in both "sizes," such as the multi-element Yagi, used in u.h.f. work up to 12 elements, the dipole and reflector, which appears in many shapes. The most common of these is the "bow-tie," so called for obvious reasons. These are quite realistic imitations of that popular article of apparel, and gave rise to much crude humour, the object of which was usually the distributor's salesman, if he walked into a shop wearing a large bow-tie (real), to be greeted with "What channel is *that* on, for goodness' sake?"

In other configurations, the dipoles become large tubes, up to 3 inches in diameter, conventional ½-inch elements, and many others; however, they remain basically dipoles. The conical makes its appearance, in sizes appropriate to the high frequency; it is used with a reflector screen, as are almost all of the others.

All of these types are occasionally used "stacked." The minute dimensions of the antennæ makes possible the stacking of 2, 4 or even 8 antennæ practicable, at least in so far as physical size is concerned. The increase in efficiency is the same as on v.h.f.

One popular type makes use of 8 dipole and reflector combinations, with a large curtain reflector. It is a smaller duplicate of the arrays used on v.h.f., known among technicians as the "flying bedsprings," not too popular because of its weight and wind-resistance. On u.h.f., this whole antenna is less than four feet square!

Vertical stacks of Yagis, conicals, and bow-ties are common, often up to 4-bays. The corner-reflector, a quite efficient type, uses bow-ties, dipoles, and even conical elements, and is also small enough to be practical.

One unusual antenna type seen, though not too often, is the helix. This antenna, developed from a prototype used in radar work, inevitably became known as the "flying corkscrew"!

Design Features of U.H.F. Aerials.—Because of the extremely high attenution offered to a u.h.f. signal from practically everything, u.h.f. antennæ are built somewhat differently from their big brothers. Instead of the common types of insulators, across the antenna terminals, complete isolation is achieved by supporting the antenna elements at a null point with heavier insulators. This is possible because of the rigidity of the small elements, and gives very good protection against losses across the antenna terminals from accumulations of dirt and moisture.

On other types a "delta-match" is achieved by fastening the dipole itself directly to the boom, and attaching the lead-in at a point far enough out on each element (which is usually a straight, instead of folded, dipole), to achieve a correct impedance match with the 300-ohm lead-in. This eliminates the need for any insulators at all, and causes a great deal of confusion among the less-informed technicians. One of the brethren recently shipped a batch of antennæ back to his distributor, with the complaint that the maker had entirely forgotten to install the insulators!

Lead-in, "Hardware" and Accessories.—Because of the very high frequencies, losses are very high in the lead-in and other materials. This has brought about the development of special types of lead-in wire for u.h.f. work. The first type used was the open-wire line, with solid conductors held apart by small rods of polystyrene. This is a very low-loss type, and is still used in many installations.

Moisture accumulation on the line is fatal to the feeble u.h.f. signal; with conventional flat-ribbon line the difference between wet and dry loss at u.h.f. is tremendous; so much so as to make the line entirely unsuitable for this service. The air-insulation of the open-wire line makes it the best of its kind, but it is undoubtedly quite difficult to handle and install (an understatement).

Later on, a special u.h.f. lead-in was brought out, to reduce the "wet-loss." This was a poly-insulated line, with a tubular web instead of the common flat web; the purpose of this was to confine the signal-carrying fields entirely within the dry space inside the line.

Installation of this line required special techniques: chief among these was the need for bringing the line "up and over" at the antenna, instead of directly up from below. This brought the open end of the tubular line facing downward, and was supposed to aid in preventing rain from entering the line. Of course, in addition to this precaution, one is supposed to plug and tape the upper end of the line.

One TV viewer had these facts of u.h.f. life rather forcibly brought home. This chap, a chronic "do-it-yourselfer," had installed his own antenna. One rainy night, peacefully watching the set, he was annoyed by the unmistakable "plop" of dripping water. A search of the house failed to turn up any leaks in the roof, and he returned to the TV set just in time to be greeted by several expensive noises, accompanied by a tinkle of falling glass, a dark screen, a puddle of water beneath the set, and a decided odour of burnt insulation!

Investigation (by a technician) disclosed that the u.h.f. lead-in he had installed made a direct line from the antenna, down through the top of a window to the back of the set. The hollow line was giving a beautiful imitation of a watering hose, liberally sprinkling the TV set's innards! The cold water falling on the hot chassis had caused the breakage of several valves, including the line-scan output, e.h.t. rectifier, damper, etc. The dissolution of these vital parts had led to the destruction of the line-scanning transformer and some other miscellaneous hardware.

Properly installed, this line will give no trouble. If the downlead is turned over and properly sealed at the top, including a good wrap with plastic tape

(*Continued on page* 65)

New bumper edition

of the

BRIMAR

RADIO VALVE & TELETUBE

MANUAL

336 pages

covering:

VALVE AND TELETUBE DATA

SPECIAL COMPONENTS AND CIRCUITRY

- Summary of Current Types for New Equipment.
- Valve ratings and base connections of nearly 300 valves and Teletubes including the Brimar "T" Range of Special Quality Valves and S.T.C. Special Valves.
- Information on Sentercel Selenium Rectifiers including contact cooled types and on Germanium Diodes, Transistors, High Grade Resistors and Brimistors.
- Circuit Section modernised and greatly increased to include Transistor Circuits.
- Radio Engineering Formulae.
- Information on Band I, 2 and 3 and Amateur Transmitting Wavebands.
- Brimarize Section and up-to-date Substitution List of American Types.
- Equivalents to C.V. Nos.

NO.7 EDITION

PRICE 6/-

SEND FOR YOUR COPY TO:

The Publicity Department

COMPONENTS GROUP

Standard Telephones and Cables Limited

FOOTSCRAY · SIDCUP · KENT · FOOtscray 3333

We are jolly good cartridges, we Acos Series 65.

Type 65-3 is good and strong—good performance and strong output.*

Type 65-1 is as hi-class a turn-over cartridge as ever turned-over.*

But even we can't give you our best if you let us go rubbing along on a worn point.

If you use sapphire, please give us a new Acos x500 stylus

at least every 50 hours of playing, and we'll look after your sound and your records.

Diamond styli, of course, last very much longer.

* Outputs: Type 65-1, 0.15 V; Type 65-3, 1.0 V, at 1 cm/sec velocity, 1,000 c/s

acos ARE DOING THINGS IN STYLI

COSMOCORD LTD. WALTHAM CROSS HERTS. TEL: WALTHAM CROSS 5206 (London subscribers please dial WA4 5206)

and a spray of acrylic plastic, it will not pick up moisture from this end. The line should be brought down the side of the house and turned up again, where it enters the house, to provide a "drip-loop." At the very bottom of this loop, two nicks with the side-cutters will make a drain-hole, to allow the moisture which inevitably condenses inside the line to escape. The only other alternative would be the complete hermetic sealing of the line, or pressurizing it, either of which is technically possible but economically impractical.

A still later development in u.h.f. lead-in brought forth the "foam-line," identical in structure to the hollow line, but with the space filled with "foamed" polyethylene. A more economical type of line is the "perforated" type of 300-ohm ribbon. This is merely standard ribbon line, which has had most of the web removed in long slots by a special punch. Thus it approaches the open-wire line, as far as air-dielectric goes, and is much cheaper than any of the others. Moisture, from rain or heavy dew, will cause a momentary loss of signal, but not as much as in the standard 300-ohm line, and the attenuation will soon be lessened, as the moisture dries or drips off. Its ease of installation and economy have made it probably the most popular among technicians.

A few other points deserve mention before we leave the subject of lead-in for u.h.f. No longer can sloppy methods of installation be tolerated. At these frequencies the line must be tight and firmly held, and stand-offs must be as long as possible, to reduce capacity effects to nearby objects (not necessarily metallic objects, either!). If possible, the stand-off should be of the type which does not surround the lead-in with a metal ring, but the type which holds the line in a plastic, as far away from the metal as possible.

When going over gutters, or past downspouts, plumbing, etc., the line must be kept as far as possible from them. Making the turn over the eaves requires the use of several stand-offs, in order to make the line curve gently, instead of making a sharp bend. Just like the traditional Chinese demon, u.h.f. signals like to travel in a straight line. They must be gently coaxed into turning the corner; too sharp a bend, and they will hop off into space and go their merry way!

Installation: Probing for Signal.—In addition to the desirable practices outlined above, a few others might be brought out, as applied to u.h.f. installation. Over the past few years, the v.h.f. technicians have learned their own areas and can tell just what antenna, what height mast, etc., are needed to get a satisfactory picture. This is not always the case in u.h.f. areas. A great deal more probing of antenna locations is necessary, and there is never the certainty that any given antenna, installed at a given height, will pick up a good picture! Fortunately for the weary technician, the u.h.f. antennæ are so small that probing is quite easy; a bow-tie, mounted on a 10-15 foot aluminium mast will serve admirably.

The use of a field-strength meter is essential: the standard makes of meters, using turret tuners, would be easiest to convert to u.h.f. One of the coils for an unused channel is removed and a special u.h.f. converter stage, employing a crystal mixer, is slipped into its place. These are the same "conversion slugs" used in TV receivers, with turret (standard-coil) tuners. Very late model field-strength meters provide coverage on both u.h.f. and v.h.f. bands, just as the later TV sets do. A bit of practice will soon acquaint the technician with the readings needed for producing good clear pictures.

Positioning of the U.H.F. Aerial.—Because of the very high frequency, it is possible to move an antenna a full wavelength in any of the three directions, in a very small space, with a resultant change in signal quality! Therefore, when installing one of them, it behoves the technician to check for response in all directions. Not only this, but the angle of tilt, is critical! One installer found a good signal, fastened the antenna to the mast, and went below decks, leaving his helper to run the lead-in. To his dismay, he found only a very small signal at the set! After the inevitable wrong guess, that the brand-new lead-in was open, and some trouble, the awful truth was uncovered: when the helper attached the lead-in to the antenna, he had pulled it too tightly, causing the antenna to tilt upward in front a few degrees; this tilt resulted in a cancellation of the signal. Thus, when making u.h.f. installation, make sure that all mounting bolts, clamps, brackets, and the like are well snugged down!

Difficulties are often encountered in locating the signal, especially in obstructed areas, or in fringes. You may even find yourself in the position of one weary technician who had walked over the entire roof for an hour, only to hear shouts from below of, "Not yet! Not yet." Finally, in discouragement, he crawled down the ladder, leaned the probe antenna against the house, and lit a cigarette. He was startled to hear a happy roar from within, "Hey! There it is! Hoo, boy, looka what a picture! etc., etc." Rushing inside, he saw a perfect, snow-free picture. Needless to say, the antenna was installed at this point, on a very short bracket, just under the peak of the gable-end of the roof. This was the only spot in the entire area where enough signal was found to make a picture!

The technically trained traveller, motoring through a u.h.f. area, can brace himself for some weird sights. While a wee Yagi antenna perched atop the well-frame in the yard, or sitting quietly on a 3-foot mast in a ditch before the house, might not arouse much curiosity from the uninitiated, it will cause some raised eyebrows among the brethren!

Foliage attenuation, as mentioned earlier, can cause peculiar effects. If an antenna is installed behind a grove of trees or even a single deciduous tree, in winter, good pictures may be obtained. When summer rears her rosy head again, the pictures may become extremely fuzzy, causing quite a bit of head-scratching among the local technical gentry. This effect is due to multiple reflections from the leaves, especially if said tree is close to the antenna. These very closely spaced ghosts are indistinguishable, but they can give the picture a very badly out of focus look!

U.H.F. Converters and Tuners.—Many American TV receivers are being equipped with "all-channel" tuners, covering the v.h.f. and u.h.f. bands. Needless to say, these are actually dual tuners, in which the u.h.f. function is supplied by a separate valve, with associated circuitry; the output of this is generally on either an unused v.h.f. channel, or on the i.f. of the set. The u.h.f. channels, given numbers

"U.H.F. signals, like gold, are where you find them"—in this case over the middle of the road!

ranging from 13 to 83, may be dialled by rotating the "fine-tuning" knob, on some sets, or by a u.h.f. knob, behind the fine tuner, on others.

Sets equipped with a standard turret tuner may be easily converted for u.h.f. reception by removing an unused channel coil and installing a fixed-tuned u.h.f. converter "slug" as they are called for some reason. These generally use a converter crystal with the output on the i.f. of the set. With the incremental-inductance, or switch-tuners used by so many makers, because of their economy, an "outboard" converter is used. This little "black box" sits on top of the TV set, and contains the same type of circuitry; it converts the u.h.f. into an unused v.h.f. channel frequency. After some slight difficulties with converters in the early production, mostly due to unreliable u.h.f. tubes, these have proven very successful, and the majority of conversions use the outboard converter, with good success.

U.H.F. and the Technicians.—Although it was feared by many during the early days that u.h.f. would prove to be very unpopular with the technical gentlemen charged with repairing and maintaining these sets, these fears have proved groundless, fortunately. Although the expected amount of difficulty was encountered, it was not an insurmountable obstacle, and a large group of technicians interviewed in a recent survey said that they preferred u.h.f. to v.h.f., in many ways, and that they were having very few troubles with it, *per se*. One of the few complaints heard concerned the poor quality of tubes furnished in u.h.f. converters, and, as we just mentioned, this was some time ago: this trouble has apparently been permanently cleared up, for no complaints have been heard on this score for quite a while.

Noise Immunity.—U.H.F. enjoys one major advantage over v.h.f.: its comparative immunity from natural and man-made noise disturbance. Lightning and atmospherics bother these tiny signals very little, and the old bugbear of v.h.f. viewers, especially those unfortunate enough to reside on or near a trunk highway, automobile ignition noise, is so small as to be almost non-existent. The only troublesome effect found in u.h.f. is a peculiar interference found in sets installed on the side of a highway or street *away* from the station: these would jump and jitter every time a car passed. This was finally traced to reflections, signals bounced off the metal tops of the passing cars into the antenna! (Incidentally, since the American car of recent vintage seems to be getting lower and lower, at least to hear the makers tell it, perhaps we shall not be bothered with this much longer. If the present trend continues, the cars will be so low that they won't be able to reflect signals into the antenna!) Until this happy day arrives, the trouble may be obviated, if not eliminated, by moving the antenna either higher, or farther back on the building, or, if close to the transmitter, by tilting it upward. This phenomenon might be called sort of an "upside-down airplane effect"!

Let us conclude this discussion of u.h.f. with the tale of the Optimistic Soul. The O.S. was a technician; he lived in a small village about 35 miles away, airline, from a low-powered u.h.f. station. Between them were two ranges of hills, one of which was only two miles or so away. He was solemnly assured, with much tutting and head-wagging, that he'd "never git anything thar." But, armed with a field-strength meter on a long cord and a probe antenna, he set blithely about his task. His v.h.f. antenna was installed atop a 40-foot tower; reception from the v.h.f. station, in the same city, was only average. The laborious probing of the tower, top to bottom, produced only a good grade of snow; no pictures. Identical results were produced from a careful probing of the roof of his house. Anyhow, the O.S. was crossing the roadway, bearing the field-strength meter and probe antenna, accompanied by his small son, complete with the customary questions. "What's that thing on the stick, Daddy?" "Why were you climbing on the roof, Daddy?" *ad infinitum*. Halfway across the road, one question finally penetrated the O.S.'s weary ears. "Why is the little needle going all the way across, Daddy?" End of story, for all practical purposes: the signal was found, "loud and clear, for several blocks," directly in the middle of the road! After consultation with the village elders, who firmly declined to re-route the road, he set up the antenna shown in the photograph, as far out over the road as possible, and wound up with consistently snow-free pictures!

There could be two morals to this story; one, that u.h.f. signals, like gold, are where you find them, and the other that you should always be sure to include Child, Small, Curious, One, in your probing kit!

"Television Aerials for Bands IV and V": The standard dipole polar diagram in Fig. 3 on page 13 of the January issue was inadvertently drawn for a vertical dipole, whereas for a horizontal aerial it should have been shown as a "figure of eight" with maxima at 0° and 180° and minima at 90° and 270° respectively. The relative maxima values shown are correct.

Measuring TV Aerial Performance

I.—Conditions to Achieve Accurate Results

By F. R. W. STRAFFORD*, M.I.E.E.

THIS article has been written with particular reference to the measurement and expression of performance of television receiving aerials. It is not limited to these, however, but its scope extends to any aerials, transmitting or receiving, for use in the frequency range from, say, 40 to 1,000 Mc/s.

In the simplest sense the measurement of aerial gain and directivity may be made by erecting a suitable radiating aerial, for example, a half-wave dipole connected to the output of an oscillator, and, at some distance from it, the aerial under test. This aerial is connected to a sensitive receiver and the resultant output is compared with a reference aerial, usually a half-wave dipole.

Unfortunately, the transfer of the experiment to another site, a change in the height or separation of the radiating and receiving aerials, or a change in the weather, will invariably produce a new set of results so that one is left perplexed and disappointed. It is, of course, the old story of failure to appreciate the many hidden factors. Almost any electrical measurement has hidden problems but the author knows of none as difficult as those encountered in aerial work.

Here are some of the principal factors to be considered:—

1. The test radiations must present a uniform field at the receiving site together with the correct polarization.
2. The height and separation of the radiating and receiving aerials must be carefully chosen.
3. The site must be flat, have sufficient area, and be free from reflecting objects.
4. Suitable radiating and receiving apparatus must be chosen.
5. The aerial under test must have its feeder correctly terminated and steps should be taken to avoid the effects of the feeder on the measurements.
6. A monitoring aerial must be used.

Test Radiations.—These must possess a plane wave-front and must be uniform over the region in which the test aerial is erected. If the radiating and receiving aerials are too close, or if spurious reflections are present, either or both will affect, adversely, the results. The radiating aerial may most conveniently be a simple half-wave dipole the axis of which is orientated in the direction of the desired polarization. The use of a distant radiator, for example, a TV transmission, is not recommended on the following grounds: (a) there may not be a plane wave at the test site, due to absorption, reflection and diffraction effects during propagation; (b) the amplitude will vary in accordance with the average modulation depth and there may be fading and variations due to aircraft; (c) the frequency cannot be varied in order to study its effect on gain and directivity; (d) the working hours are restricted; (e) power variations are always liable to occur.

* Consulting radio and electronic engineer.

Choosing Height of Radiating and Test Aerials.—The intensity of the electro-magnetic field from the radiator falls off inversely as the distance. Associated with a dipole radiator there are also the magnetic field due to the current in the dipole and the electric field due to the charges at its extremities. The former falls off as the fourth power and the latter as the sixth power of the distance. This near field, as it is called, to distinguish it from the far field of true electro-magnetic radiation, has fallen to negligible proportions at a distance of five wavelengths from the radiator. It might appear to be reasonable to work with this separation but this is not so as will later be proved.

It is desirable that the height of both radiating and test aerials be at least one wavelength above the ground. This secures horizontal propagation, and prevents the radiation resistance of the test aerial falling badly and mismatching the feeder impedance for which it is designed. At 45 Mc/s a height of about 25 feet will suffice. This would fall to about



Fig. 1. Direct and reflected paths of test radiations sent from R and received at T.

6 feet at 180Mc/s but the results are likely to be upset by the presence of personnel unless remote control is used. In the author's experience it is desirable to keep to about 25 feet for all work. If greater heights are employed greater separation between radiating and test aerials will be required. The reasons for this will now be explained.

Fig. 1 shows the radiating aerial, R, and the aerial under test, T, located at equal heights, h, over a flat ground at a distance, d, apart. The field at T is the vector sum of the direct field produced by the wave over the path d, and the reflected wave over the path r, r'. The resultant field, E_T, can be written as:—

$$E_T = E_D (1 - K\epsilon^{-jx}) \quad .. \quad .. \quad .. \quad (1)$$

In this expression K is the complex reflection coefficient of the ground and x, in radians, is the phase difference between the direct and reflected wave and is given by $x = 4\pi h^2/\lambda d$.

The magnitude of K varies with the conductivity and permittivity of the ground. It also varies with frequency and with the angle of incidence, θ, of the reflected wave. For v.h.f. and normal soils its value approaches minus 1, that is to say, the reflected wave is 180 degrees out of phase with the direct wave and almost cancels it. It is for this reason that

the free-space field intensity, where there is no reflection, is very much greater generally than for propagation over the earth. This, however, is only true when the angle of reflection is very small. Over a range of angles from about 10 to 30 degrees according to the nature of the soil (wet, dry, sandy, chalky, and so on) there will exist a critical angle at which nearly all of the energy of the reflected wave will be absorbed so that the value of K will approach zero. In this case reference to equation (1) will show that the total field at the test aerial will be nearly equal to the free-space direct field E_D. So much

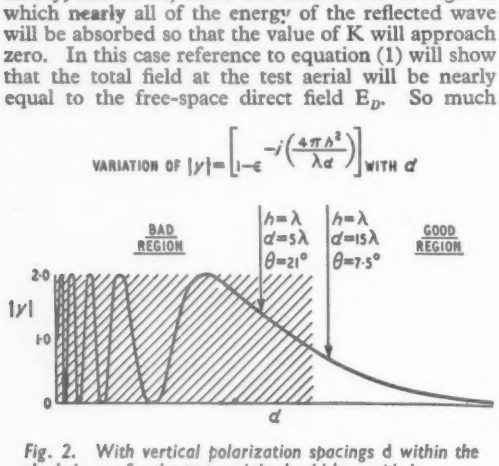

Fig. 2. With vertical polarization spacings d within the shaded area for the test aerials should be avoided.

for the reflection coefficient K. Putting $K = -1$ it is instructive to examine how the modulus $|y|$ of $(1-\epsilon^{-jx})$ varies with respect to d. For small values of d, $|y|$ oscillates between 0 and 2 and oscillates with infinite rapidity as d approaches zero. When d is large $|y|$ approaches the limiting value of $4\pi h^2/\lambda d$ which is non-oscillatory and is the good region for working. Unfortunately, when vertically polarized waves are considered K is not equal to -1 but tends to zero over the range of critical angles mentioned previously. Calculations show that all values of d within the shaded area of Fig. 2 are to be avoided. It all boils down to the fact that the angle of reflection θ sets the tune. If this is not greater than, say, 7.5 degrees the critical angle is avoided and so is the oscillating distribution, with distance, of the field at the test aerial. Hence, one is safe in working at a distance-height ratio of 15. For this reason it is undesirable to erect the aerials more than one wavelength high or the distances will become rather large, apart from the problem of obtaining an accurately variable source of power for the radiating aerial, as will be shown in a later section of this article.

Assuming that a height of 25 feet is chosen for Channel I (Band I) measurements the minimum spacing of the aerials will be of the order of 375 feet, but it is the writer's experience that this may be reduced to 300 feet without any observed inaccuracies. In this case the angle of reflection, θ, will be increased to 9.5 degrees but is still just clear of the critical angle range. Incidentally, this critical angle is known as the Brewster angle from that gentleman's work in optical theory. It does not exist for horizontally polarized radiation so that the spacing for tests on horizontal aerials can safely be halved. This is important for workers on horizontal aerials only, since the land may have to be purchased if a permanent test site is to be established. For the television aerial worker both polarizations are involved and it is a question of Hobson's choice!

The reader might be tempted to conclude that close spacing, say 5λ, could be used in spite of the large variations of total field at the test aerial with small changes of distance. He may argue that since both height and distance are fixed, the aerial under test, and the simple dipole with which it is to be compared are in the same field intensity, whatever value it may have. But the test aerial may be a six-element Yagi array. Its boom will be over one wavelength long. Over this distance the field intensity can vary by over 100 per cent so that each element of the array will experience a different field intensity. This has the effect of destroying its performance in terms of gain and directivity.

Choice of Site: For work down to 40Mc/s it has been shown that a separation between aerials of not less than 300 feet is essential if the aerials are mounted at a height of 25 feet. If the work is restricted to Band III the height could, theoretically, be reduced to about 6 feet and the separation to 75 feet. The low height causes problems due to the comparable height of personnel and unless remote control is used it is best avoided. Very considerable variation of both gain and directivity occur through quite small movements of personnel, but when the height is increased to 25 feet these vanish.

Provided that there are no reflecting objects the width of the site is unimportant. One could use a strip of land just wide enough to accommodate the paraphenalia. Thus, a strip of land 300 feet by, say, 15 feet would be satisfactory if it were located in the wide open spaces.

One must be practical and assume that some reflecting objects may exist and the question is, how far distant must they be before their effects impair the measurements?

The major effect of reflections is to upset the measurement of directivity. If the minimum distance of a good reflector can be deduced in terms of maintaining accurate directional response the gain will also be unaffected. In fact, a much greater amount of reflection can be introduced if gain measurements only are contemplated; but since it is most unlikely that this will occur in practice the worst condition must be avoided.

The cause of a false directional response due to reflections may be seen by reference to Fig. 3. The radiating aerial, R, and the test aerial, T, are 300 feet apart. A perfect reflector, such as will be closely approached by a large gas holder, is situated at a distance x behind the test aerial. In the first place assume that the test aerial has excellent directivity, that is, a narrow beam in one direction and zero response in all other directions. This narrow beam is shown in Fig. 3(a). In the absence of any reflection the test aerial will pick up a rapidly diminishing signal as it is turned off-line from the radiator R. Reception will, of course, be zero when it is turned in the opposite direction. If the reflector is present the reflected signal coming back to the test aerial will also be received so that the beam will now appear to possess a back-lobe whose amplitude, in relation, to its forward lobe, will depend on the distance and the efficiency of the reflector (Fig. 3(b)). By the same process a number of reflectors located around the test aerial will produce an equal number of false lobes the individual amplitudes of which

will be dependent upon the size and distance of the reflecting object (Fig. 3(c)). It has been shown[1] that the strongest reflections are those from objects behind the test aerial as shown in Fig. 3.

The calculation of the minimum distance of the worst type of reflection is not a simple matter. This distance is determined by the maximum front-to-back ratio likely to be given by the aerial under test. Experience indicates that this is not likely to exceed 30dB so that the reflected signal must be at least 40dB below the incident signal.

Since it is impossible to calculate, with any accuracy, the magnitude of the reflection from buildings and other structures the practical assessment of the degree of reflection may be made by measuring the standing-wave ratio of the combined direct and reflected field over the region in which the test aerial is to be sited. If two waves of equal frequency arrive at a point from opposite directions a standing-wave pattern will be set up and the ratio of the maximum to minimum amplitude will depend upon the ratio of the amplitude of the respective waves.

Let E_1 be the amplitude of the direct wave and E_2 the reflected wave, and let their ratio be n. The standing-wave ratio is given by the expression:

$$r = \frac{E_1+E_2}{E_1-E_2} \text{ or, } r = \frac{1+\frac{1}{n}}{1-\frac{1}{n}} \quad .. \quad .. \quad (2)$$

The magnitude of the reflected field in dB below the direct field will be:

$$z(\text{dB}) = 20 \log_{10} \frac{r+1}{r-1} = 20 \log_{10} n \quad .. \quad (3)$$

so that if z is to be reduced 100 times (40dB) the standing-wave ratio works out to 1.02.

To measure such a ratio, which is very nearly unity, requires great care. A test dipole, fed by a feeder located along its axis, is arranged so that it can be moved radially about its position. The object of running the feeder in the direction of the axis of the dipole is to prevent reflections from the feeder masking the result. The height of the dipole must be accurately maintained since the field intensity is also proportional to this. Fig. 4 is a sketch of a suitable arrangement, and it must be erected over very flat ground. The boom must be at least half-wave in length and the probe can be arranged to slide along it by a rope and pulley arrangement.

[1] Lawson, D. I. "Multipath Interference in Television Transmission," *Journ. I.E.E.* 1945, Vol. 92, Part III, page 125.

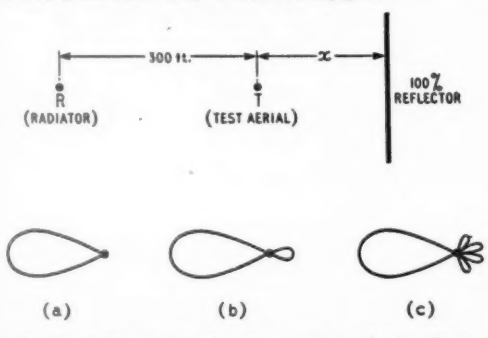

Fig. 3. Affect on the polar diagram of a reflecting object behind the receiving aerial, T.

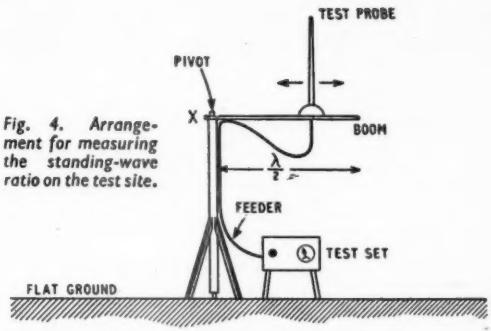

Fig. 4. Arrangement for measuring the standing-wave ratio on the test site.

The procedure is to explore the standing-wave ratio by setting the boom at various angles and sliding the probe from one end of the boom to the other. If the resultant does not exceed 1.02 consideration can be given to the selection of the measuring apparatus, the actual tests, and the expression of the results. These will be dealt with in part 2 of this article.

(To be continued)

CLUB NEWS

Birmingham.—"The development of magnetic recording tapes" is the title of a talk to be given by a representative of the Minnesota Mining and Manufacturing Co. to members of the Slade Radio Society on February 14th. A fortnight later J. E. Smith (G3JZF) will deal with the design and construction of a.f. amplifier stages. Meetings are held on alternate Fridays at 7.45 at the Church House, High Street, Erdington. Instructional morse classes are held on Tuesday and Thursday evenings, and slow morse transmissions are radiated by G3AYJ on 1.9 Mc/s at 8.0 p.m. on Mondays. Sec.: C. N. Smart, 110, Woolmore Road, Erdington, Birmingham, 23.

Birmingham.—The Midland Amateur Radio Society meets the third Tuesday of each month at 7.30 at the Midland Institute, Paradise Street. Morse classes are held every Thursday at 7.30 at the British Red Cross Society, 16 Highfield Road, Edgbaston. Sec.: C. J. Haycock, G3JDJ, 360, Portland Road Edgbaston, Birmingham, 15.

Bradford.—Dr. G. N. Patchett will speak on transistors and their application to radio at the meeting of the Bradford Amateur Radio Society at 7.30 on February 4th at the Bradford College of Technology. Sec.: D. M. Pratt, G3KEP, 27 Woodlands Grove Cottingley, Bingley.

Bury.—At the February 11th meeting of the Bury Radio Society J. E. Hodgkins (G3EJF) will talk about radio astronomy. Meetings are held on the second Tuesday of each month at 8.0 at the George Hotel, Kay Gardens. Sec.: L. Robinson, 56 Avondale Avenue, Bury.

Reading.—Selsyns and desyns will be discussed by S. Woodward at the meeting of the Reading Amateur Radio Group at 7.30 on February 22nd at the club's headquarters in Broad Street. Sec.: A. B. Hutchence (G3IKA), 12 Chiltern Bank, Peppard, Nr. Henley, Oxon.

Wellingborough.—At the meeting of the Wellingborough and District Radio and Television Society on February 13th G. Abrams will speak on basic f.m. detectors and at the February 27th meeting J. Wagstaff will describe a home-constructed 6-inch television receiver. Meetings are held at 7.30 every Thursday at the Silver Street Club Room. Sec.: P. E. B. Butler, 84 Wellingborough Road, Rushden.

Magnetism in Materials

(Continued from p. 30 of previous issue)

2. Ferromagnetic Domains and Their Influence on Magnetic Properties

By D. H. MARTIN, Ph.D.

THE concept of the magnetic domain was first put forward by Weiss in 1908 in order to explain how a spontaneously magnetized material could exhibit zero overall magnetization. The existence of domains was not fully confirmed experimentally until the last ten years or so, although a great deal of indirect evidence had already accumulated.

The idea is illustrated in Fig. 3. Each domain is spontaneously magnetized, to a degree determined by the chemical composition of the material and by the temperature, and in a direction different from its neighbours. The overall magnetization of a specimen is the vector sum of the magnetizations of its domains, with appropriate weighting for their volumes. The structure of Fig. 3 for example would leave a specimen with zero overall magnetization; it would be "unmagnetized" in spite of the intense magnetization in each domain. When a sample is subjected to an external field it becomes magnetized because there is a change in the sizes and directions of the domains; there is *no change* in the magnitude of the spontaneous magnetization, I_s.



Fig. 3. Example of the arrangement of spontaneous magnetization in a domain structure. The alignment of atomic dipoles is illustrated in two of the domains.

These processes will be discussed more fully later, but first let me describe the experiments which have shown that domains really do exist. If a crystal of a ferromagnetic metal is carefully polished mechanically and electrolytically to remove the strained layers in its surfaces, and then a drop of a colloidal suspension of magnetic particles is applied to one of its faces, examination under a microscope reveals patterns formed on the surface by the particles. Magnetite is ferrimagnetic and the particles, which are about 10^{-6} cm in diameter, therefore move to where the stray fields close to the surface are most intense, just as iron filings cluster at the poles of a magnet. The surface fields arise, of course, from the domain structure in the surface layer of the crystal and, if the crystal face has a suitable crystallographic orientation, the patterns directly reveal the underlying domains. The photograph in Fig. 4 (a) was taken through a microscope and shows the domains in a crystal of cobalt. The parallel lines of dark magnetite particles mark the boundaries between domains which are spontaneously magnetized as shown in Fig. 4 (b). There are normally several domains in each crystallite of a metal, but even so each domain contains at least 10^{16} atoms. In the large crystals which have been grown especially for studies of domain processes the domains are sometimes as large as a few millimetres in each dimension.

The boundaries between domains are narrow regions in which the spontaneous magnetization changes direction progressively from one domain to its neighbour. In iron the domains walls are about 10^{-5} cm wide, that is about 300 atoms wide. In certain very soft materials, such as "Supermalloy", the walls are perhaps as wide as 10^{-3} cm.

Magnetic Anisotrophy

It is found that in the absence of an applied field each domain in a crystal is magnetized in one of a small number of *preferred*, or *easy* directions, an effect known as *magnetocrystalline anisotrophy*. In

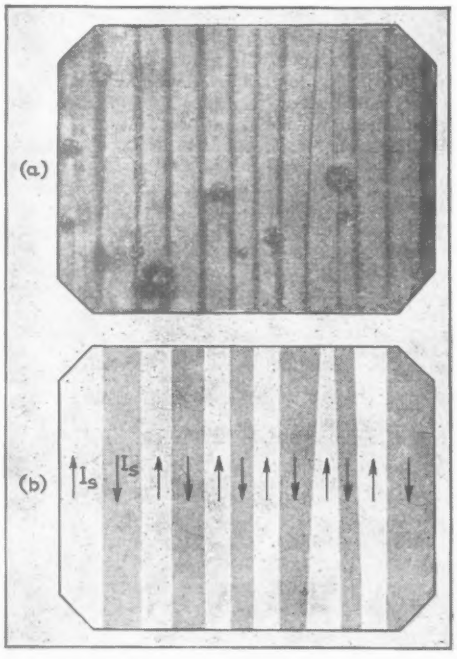

Fig. 4. (a) Photograph taken through a microscope of a powder pattern on a crystal of cobalt. The portion of the crystal recorded is about 0.025 inch across. (b) Sketch illustrating the domain structure revealed by the pattern.



Fig. 5. Arrangement of iron atoms on a "body-centred cubic lattice." The "Miller indices" of the directions of highest symmetry are indicated.



Fig. 6. A magnetization curve. The increase in I, as far as the "knee" of the curve, is mainly due to domain wall movement. The less steep rise in I, beyond the knee, is mainly due to domain rotation.

most ferromagnetic materials the atoms in each crystal are arranged on a cubic lattice; iron atoms, for example, being arranged as illustrated in Fig. 5, in a fashion known as body-centred cubic. Those directions parallel to the cube edges are denoted by the Miller indices [100] and in iron it is these directions which are preferred. Counting both senses for each edge they are six in number. In nickel the eight cube diagonals, that is the [111] directions, are preferred. Cobalt on the other hand is magnetically uni-axial and domains are magnetized parallel or anti-parallel to the hexagonal axis in each crystal. Only in the presence of a comparatively strong applied field can the spontaneous magnetization rotate away from the preferred directions.

Wall Movement. As the field applied to a sample is steadily increased its overall intensity of magnetization increases, generally as illustrated in Fig. 6. The dominant domain process occurring in the specimen in the early portion of the curve is different from that in the later stages. In the first part, the magnetization rises steeply to more than half its final saturation value. Thereafter the rate of increase of magnetization with field is reduced. The steep rise is due mainly to *domain wall movement*. For example, consider the domain structure illustrated in Fig. 3. If a field were applied to a specimen containing this structure in the direction left to right, those domains in the upper half would be favourably directed with respect to the field, compared with the lower domains. They would therefore grow at the expense of the others as a result of a downward displacement of the saw-tooth wall running across the structure. Microscopically, the displacement of a domain wall is the progressive rotation of those atomic dipoles in the vicinity of the wall out of the direction of magnetization of the shrinking domain into that of the expanding one. This is a process which takes place comparatively readily under the action of an applied field since all the domains remain magnetized in one or other of the preferred crystal directions. The colloidal magnetite technique can be used to study wall movements. The photographs in Fig. 7 show successive wall positions in a cobalt crystal which was subjected to a steadily increasing magnetic field.

Wall movement will proceed until a stage is reached when no further increase in magnetization can result from wall movement alone. For example, take the structure of Fig. 3. When the saw-tooth wall has moved to the bottom of the structure the remaining domains are equally inclined to the field, and displacement of the walls separating them would achieve nothing. The specimen is then at the "knee" of its magnetization curve. The specimen's overall magnetization can now increase only as a result of rotation of the spontaneous magnetization within each domain as a whole. As the applied field increases further, therefore, the directions of magnetization

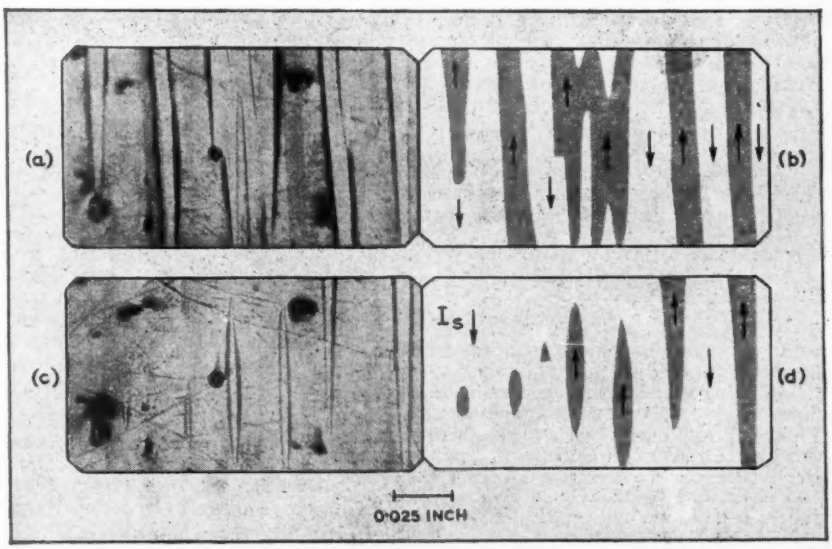

Fig. 7. Domains in a cobalt crystal. (a) and (c) cover the same portion of the crystal's surface but a field has been applied in the downward direction in the case of (c). The domain walls have moved in such a direction that the unfavourably magnetized domains have shrunk, as illustrated in the sketches.

in the domains progressively rotate towards the field. Relatively large fields are required in most materials, however, to produce large rotations against the anisotropy forces, and the magnetization curve rises progressively less steeply. Saturation is achieved when all the domains are aligned with the applied field, and the overall magnetization is then equal to the spontaneous magnetization.

The dual process of magnetization is most clearly revealed in the magnetization curves of single crystals, such as those shown in Fig. 8. Using special heat treatments it is possible to grow very large crystals in metal ingots, and the growth in our understanding of magnetic materials in the last ten years has largely been the result of experiments on such crystals. The magnetization curves in Fig. 8 are for crystals of iron to which is applied a magnetic field respectively in a [100], a [110] and a [111] direction (see Fig. 5). For the [100] case, saturation is attained in a



Fig. 8 Magnetization curves for the [100], [110] and [111] directions of a crystal of iron.

small field because [100] is a preferred direction and saturation can be achieved by domain wall movement alone. For the [110] and [111] cases wall movement alone can produce a magnetization equal to $1/\sqrt{2}$ and $1/\sqrt{3}$ of the saturation magnetization respectively; subsequent increases in magnetization are due to rotation. The scale of Fig. 8 is too small to record the rise to the knees of the curves which takes place, by wall movement, in small fields.

Anisotropy Constants. Rotation takes place more readily in some magnetic materials than in others and the effect is measured in terms of the "anisotropy constants" of the materials. It is found that to rotate a domain's magnetization from a [100] direction into a direction having direction cosines* (α_1, α_2, α_3) the applied field must do work equal per c.c. to:

$$E_K = K_1(\alpha_1^2\alpha_2^2 + \alpha_2^2\alpha_3^2 + \alpha_3^2\alpha_1^2) + K_2\alpha_1^2\alpha_2^2\alpha_3^2$$

where K_1 and K_2 are the anisotropy constants of the material. For the [111] direction for example, $\alpha_1 = \alpha_2 = \alpha_3 = 1/\sqrt{3}$ and E_K is thus $\frac{K_1}{3} + \frac{K_2}{27}$ while for the [110] direction $\alpha_1 = \alpha_2 = 1/\sqrt{2}$ and $\alpha_3 = 0$; E_K is then $\frac{K_1}{4}$. Measurements of the magnetization curves in these two directions therefore serve to determine K_1 and K_2, and knowing these the energy associated with magnetization in any other direction can be calculated using the equation above. It is then possible to calculate the shape of the magnetization curves of single crystals in the rotation region whatever the direction of the applied field with respect to the crystal axes. It is more difficult to calculate the magnetization curves of polycrystalline samples because the field *inside* the specimen will vary somewhat from crystal to crystal, but for appropriate cases calculations have been made and agree satisfactorily with measured curves. Clearly, the larger the anisotropy constants, K, for the material, the less steeply will its magnetization curve rise above "the knee." For materials whose easy axes are [100] directions K_1 is positive, and for those with [111] easy axes K_1 is negative.

*The cosines of the angles between the direction concerned and the three cube axes, i.e. the three [100] directions.

Magnetostriction

Before going on to consider the magnetization curve below the knee, where wall movement, and not rotation, is the dominant mechanism (but where, nevertheless, the magnitude of K proves to be a most important consideration) I must deal briefly with the influence of mechanical stresses in magnetic materials. It is well known that specimens of some materials expand in length a minute amount when subjected to a magnetic field, while other materials contract. This is "magnetostriction" and is the basis of magnetostriction oscillators. Fundamentally it is due to the fact that tension in a crystal very slightly distorts the lattice and the preferred direction is then determined not only by the lattice directions but also by the magnitude and direction of the tension. The effect is measured in terms of the "magnetostriction constants" of the material, which may be determined by observing the changes in dimensions of a test single crystal when it is saturated in different crystal directions. The magnetostriction constants, which I denote by λ, may be positive or negative (expansion or contraction), and three are needed in the case of a cubic crystal. The larger λ the greater the effect of mechanical strain in determining the favoured direction of magnetization. Magnetic materials are not often used in uniformly stressed conditions, but it is not possible to produce a material which is entirely free from random small-scale strains, and in the presence of these it will be seen that the magnitude of λ is of importance in connection with wall movement.

Hysteresis

In a perfect crystal a domain wall would move under the influence of an infinitesimally small applied field. Real materials, however, require the application of definite fields to reach the knee of the magnetization curve. Highly refined 78% nickel-iron alloys require only about 0.002 oersteds whilst special permanent magnet alloys of the Alnico type may require several hundred oersteds and between these extremes fall all the useful magnetic alloys. The impedance to wall movement arises from the impurities and random stresses which are always present to some degree even in the most carefully prepared materials. The impedance, moreover, is *irreversible*, or "frictional" in the sense that switching off a field which has been applied to move a wall forward does not result in the wall's returning to its initial position. In fact the application of a reverse field would be required to do this. This, of course, leads to the important

(*Continued on page 73*)

"BELLING LEE" NOTES

PRINTED CIRCUITS

A few months ago, we were called to task because one of our distribution amplifiers was not performing as well as was expected. The matter was investigated; the amplifier was tested, on its own and appeared to be up to specification. When the installation was examined it was found that a diplexer not of our design was in the circuit. When this was replaced by one of ours, the efficiency of the installation was normal.

The point of this factual story is that the dealer blamed the printed circuit diplexer and implied that all printed circuit "jobs" were alike. Now that was most unfair; printed circuit techniques are here to stay, and if properly handled, the diplexer equipment or what-have-you is just as good as the circuit designer has made it.

KEEP ON PROBING

Recently we had some interesting work to do on a television installation in a particularly tricky area about twenty-four miles from the transmitter, but low lying in relation to the surrounding country. The mast was a remarkably useful "home-made" one capable of being raised or lowered vertically, and of being rotated. At the top was a band I and a double 6 band III. The band III picture was not as good as it should have been, and we decided to carry out an investigation which, incidentally, was carefully followed by a prominent senior engineer specialising in electronics.

As a first test, a six element band III array was clamped to the mast about six feet above the roof, as a reference. The resulting signal was better than that from the double six at the mast head. Then, as a matter of interest, the lower six was raised while we were able to look at the picture. As the distance from the roof increased, the picture changed from good to bad. Going through various stages, the picture would tear, then it would get better, further up two or three ghosts would appear, then it would tear again and so on.

The double six was rotated through 360° without much effect, as reflections came in from all around. The single six was directional. There was more than enough signal, but there were still ghosts. We then tried a double three about 20 feet above the roof, this got rid of the ghosts and left us with ample signal.

We would like to have tried further positions, but the light was failing, we were far from home and everybody was satisfied.

The lesson to be learnt from all this is that in a difficult location, best results cannot be expected just by putting up the biggest aerial as high as possible. The biggest aerial may not be the best to use, and the site must be probed for the best signal, and probed at various heights. Generally we say go as high as you can, but this is not an invariable rule. There is the site at Hebden Bridge, 12 miles from Holme Moss, where the only signal was from a "Doorod" in the cellar, but that was another problem.

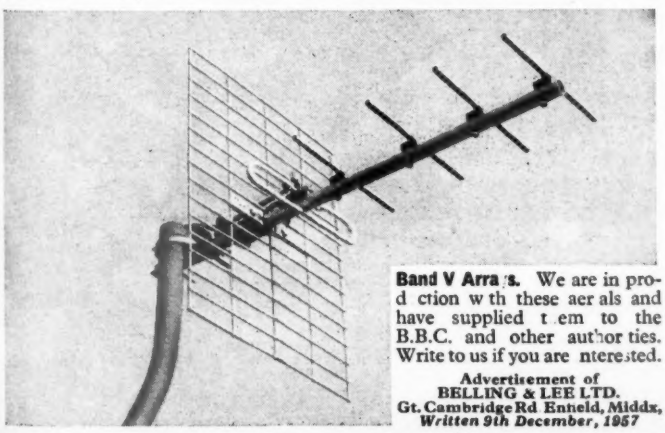

Band V Arra s. We are in prod ction w th these aer als and have supplied t em to the B.B.C. and other auth or ties. Write to us if you are nterested.

Advertisement of
BELLING & LEE LTD.
Gt. Cambridge Rd Enfield, Middx,
Written 9th December, 1957

"BELLING-LEE" INTERFERENCE FILTERS



L.1314. For 2-core cables, 2 amp. 250 v. A.C./D.C. This new small flex lead filter is designed for the suppression of interference at band I television frequencies only, and is for insertion in the flex lead *within 6in.* of the motor of an appliance. This is the most convenient form of filter which can be readily installed and is complete with terminals, cord grips, etc.



L.799. (2- or 3-core) 2 amp. 250 v. A.C./D.C. Inductor and capacitor filter effective at band I television frequencies and short and medium wavebands. This is a filter designed for connection in the lead of domestic electrical equipment such as hair dryers, vacuum cleaners, sewing machine motors, electric fans, etc., and to be truly effective must be fitted *within 6in.* of the connections of the motor in the appliance.

L.1334. 2 Amp. This very small inductor is essential for the filtering of interference on band III, and is individually tuned for use on band I. It must be fitted inside the casing of the appliance. When dealing with these very high frequencies, it is generally quite useless to attempt filtering in the flex lead, as the odd 6in. of lead together with the overall dimensions of the appliance is an appreciable factor of the wavelengths and the whole acts as a radiator of interference.

BELLING & LEE LTD
GREAT CAMBRIDGE RD., ENFIELD, MIDDX., ENGLAND
Telephone: Enfield 3322 · Telegrams: Radiobel, Enfield

ENROL with E·M·I

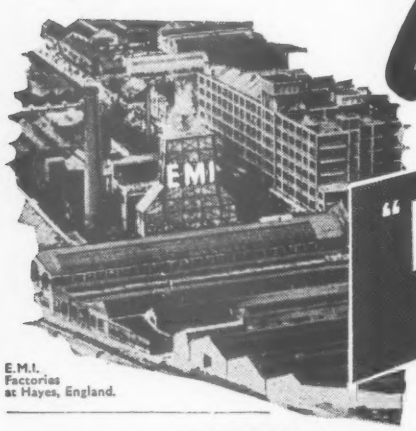

E.M.I. Factories at Hayes, England.

"HIS MASTER'S VOICE"
MARCONIPHONE · COLUMBIA

to train for your
CAREER-HOBBY
OR NEW INTEREST

PERSONAL & INDIVIDUAL HOME TRAINING IN—

Accountancy
Advertising
Aeronautical Eng.
A.R.B. Licences
Art (Fashion, Illustrating, Humorous)
Automobile Eng.
Banking
Book-keeping
Building
Business Management
Carpentry
Chemistry
City & Guilds Exams.
Civil Service
Commercial Subjects
Commercial Art
Computers
Customs Officer
Draughtsmanship
Economics
Electrical Eng.
Electrical Installations
Electronics
Electronic Draughtsmanship
Eng. Drawing
Export
General Certificate of Education
Heating & Ventilating Eng.
High Speed Oil Engines
Industrial Admin.
Jig & Tool Design
Journalism
Languages
Management
Maintenance Eng.
Mathematics
M.C.A. Licences
Mechanical Eng.
Metallurgy
Motor Eng.
Painting & Decorating
Photography
P.M.G. Cert.
Police
Production Eng.
Production Planning
Radar
Radio
Radio Amateurs (C & G) Licence
Radio & Television Servicing
Refrigeration
Sales Management
Sanitary Eng.
Salesmanship
Secretaryship
Servo Mechanisms
Shorthand & Typing
Short Story Writing
Short Wave Radio
Sound Recording
Telecommunications
Television
Time & Motion Study
Tracing
Transistors
Welding
Workshop Practice
Works Management
and many others

Also courses for GENERAL CERTIFICATE OF EDUCATION, A.M.I.H. & V.E., A.M.S.E., A.M.Brit.I.R.E., A.M.I.Mech.E., A.M.I.E.D., A.M.I.M.I., A.F.R.Ae.S., A.M.I.P.E., A.M.I.I.A., A.C.C.A., A.C.I.S., A.C.C.S., A.C.W.A., City & Guilds Examinations, R.T.E.B. Serv. Certs., R.S.A. Certificates, etc.

NEW!

Courses with PRACTICAL EQUIPMENT
in RADIO · TELEVISION · MECHANICS
CHEMISTRY · ELECTRICITY · DRAUGHTSMANSHIP
PHOTOGRAPHY, ETC., ETC.

COURSE FROM 15/- PER MONTH

EMI INSTITUTES

POST THIS COUPON TODAY

To:—E.M.I. INSTITUTES, Dept. 127K, London, W.4.

NAME ..... Age ..... (if under 21)

ADDRESS .....

I am interested in the following subject(s) with/without equipment

PER. 58 (We shall not worry you with personal visits)

BLOCK CAPS PLEASE

IC 106

FREE

The only Home Study College run by a World-wide industrial organisation

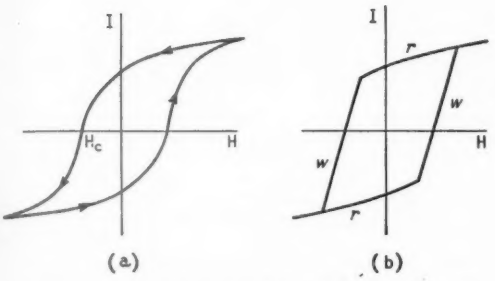

Fig. 9 (a) Typical hysteresis loop. As the applied field alternates the magnetization I follows the loop in the direction indicated. (b) Explanation of hysteresis in terms of rotation (r) and impeded wall motion (w).

phenomenon of *hysteresis*. When a specimen is subjected to an alternating field its intensity of magnetization varies cyclically as illustrated by the hysteresis loop of Fig. 9(a). The general form of the curve is explained in terms of simple domain theory in Fig. 9(b). Domain rotation is normally reversible and thus gives rise to no hysteresis. In the wall movement region of a magnetization curve, however, the " frictional " resistant to wall motion causes the curve to open up into a hysteresis loop.

The way in which impurities impede the movement of a domain wall can be seen by reference to Fig. 10 which illustrates a cubical non-magnetic void or inclusion in a ferromagnetic material. In Fig. 10(a) a domain wall bisects the inclusion. The magnetization diverges at the edges of the hole, that is, forms "free poles" there, and, since the spontaneous magnetization to the left of the domain wall is opposite to that in the right, the pole distribution is rather like that associated with two short bar magnets lying side by side with north pole next to south. Suppose now that the wall moves beyond the inclusion as in Fig. 10(b). The pole distribution round the inclusion is now like that associated with two magnets with their north poles together. It is well known that in order to twist two bar magnets from the stable anti-parallel arrangement into the parallel situation work must be done; or putting this another way the magnetostatic energy of the first arrangement is much less than that of the second. This also applies to the pole distributions round the inclusion and in order to move the domain wall from the position in Fig. 10(a) to that in Fig. 10(b) the field must do work. This is the origin of the impedance to wall motion. In a real material the impurities form many non-magnetic inclusions randomly arranged, and the energy associated with a moving domain wall fluctuates, being low in those positions of the wall where it happens to bisect a large number of inclusions, and being relatively large when it bisects few. A wall will stay in a position where the associated energy is low until moved by an applied field. If the field is then switched off the wall will slip into the nearest energy minimum and stay there until a field is applied again.

The effect of an inclusion is a little less simple than is illustrated in Figs. 10(a),(b), because the stray fields due to the free poles at the inclusion tend to rotate the spontaneous magnetization out of the preferred direction in the region close



Fig. 10. Effect of a non-magnetic inclusion (shaded).



Fig. 11. The rotation of I_s close to a pit in the surface of a silicon-iron crystal has resulted in the formation of a spike domain.

to the inclusion. The result is that the free poles, instead of appearing at the edges of the inclusion, are spread through a volume somewhat larger than the inclusion, as is illustrated in Fig. 10(c); and the impedance to the wall motion is consequently less than for the simple case. Now the rotation effect will be the more marked the smaller the anisotropy constant K. The conclusion therefore, is that for a given impurity distribution, the larger K the greater will the hysteresis be and the smaller the initial and maximum permeabilities. This conclusion has been amply demonstrated especially with certain silicon-iron and nickel-iron alloys discussed in detail in a later section.

A given amount of impurity causes the greatest impedance when it is dispersed through the material in the form of particles having a diameter about equal to the width of a domain wall, which in iron means about 10^{-5} cm, but in Mumetal considerably larger than 10^{-5} cm. Carbon, sulphur, oxygen and nitrogen are probably the most troublesome impurities in practice and much attention is paid to eliminating them. The influence of non-magnetic inclusions can be observed directly, in the case of large pits in the surface of a crystal of iron, using the powder pattern techniques described earlier. At a large inclusion the rotation mentioned above takes place to such an extent that small spike-like domains are formed like that illustrated in the photograph of Fig. 11.

Wall motion is also impeded by residual mechanical strains which exist in any real material however carefully prepared. In a region of stress the preferred direction of spontaneous magnetization is determined not solely by the crystal lattice but also by the direction of tension. The spontaneous magnetization is therefore very slightly rotated by the random tensions with the consequent formation of islands of " free poles " similar to those due to non-magnetic inclusions. These give rise to wall impedance. The greater the magnetostriction constant of the material the greater is the influence of tension and therefore the greater the

hysteresis and the smaller the permeability. This fact will be illustrated later when describing the remarkable Permalloy and Mumetal alloys.

Powder Magnets

I have stressed that large increases in magnetization which occur in small applied fields are due to domain wall movement. It has recently been found possible to make materials which contain no domain walls. Specimens of these materials are made up of minute powder particles and have become important because of their use in recording tapes and permanent magnets.†

In these materials the process of magnetization takes place only by domain rotation. In order to discuss them it is necessary to ask why domain



Fig. 12. Magnetostatic energies for single- and multi-domain specimens.

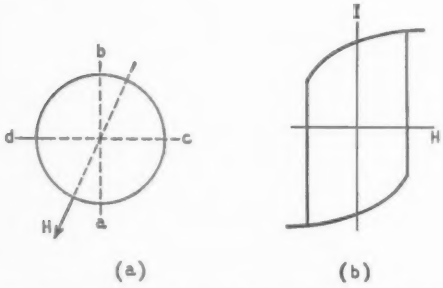

Fig. 13. Illustrating irreversible rotation in single-domain particles.

walls should ever appear in a material. Energy must be provided if the area of wall is to be increased. This is because the electron spins within a wall are not perfectly aligned as the exchange forces would have them; their direction changes through the wall from one domain to the other and they therefore possess exchange potential energy. A domain wall can therefore form in a specimen only if its presence leads to a reduction of some other energy. Fig. 12 illustrates the alternatives. In the absence of domain walls a specimen will be a single domain as in Fig. 12(a). In Fig. 12(b) a wall divides the specimen into two domains. Now the magnetostatic energy associated with the two domains of Fig. 13(b) is equal to that of two bar magnets lying together with the north pole of one next to the south pole of the other. The magnetostatic energy of the single domain in Fig. 12(a) on the other hand is like that associated with two bar magnets whose north poles are together, and is therefore quite clearly larger than that of the two domains. The introduction of a domain wall thus reduces the overall magnetostatic energy and this is the basic reason why domains form.

The magnetostatic energy of a single domain is roughly proportional to its volume while the energy of a wall would be proportional to the area of cross-section. The smaller the specimen therefore the smaller the ratio between the magnetostatic energy and the domain wall energy, and for particles smaller than a certain size the introduction of a domain wall would in fact increase, not decrease, the total energy. Such particles will remain in a single domain state, containing no domain walls. The domain wall energy in iron is approximately 1 erg/cm^2 while the magnetostatic energy of a spherical single domain of radius R is $\frac{8}{9}\pi^2 R^3 I_s^2$ where I_s is the spontaneous magnetization, which is for iron about 2×10^3 e.m.u. The critical size for a single domain particle of iron is therefore of the order of 10^{-6} cm diameter. Powders of iron showing properties approaching those of single domains have in fact been produced. For some materials the wall energy is larger than for iron whilst I_s is smaller; this is especially so for certain ferrites. These materials consequently have a much greater critical size of a micron or so, and single domain powders are fairly easily produced. Since there are no walls in single domain particles magnetization can proceed in the presence of an applied field only by *rotation* of the spontaneous magnetization. Although rotation in normal materials is mainly reversible, in the absence of domain walls irreversible rotation processes giving rise to hysteresis occur. As an illustration of this consider Fig. 13(a). In the absence of an applied field the spherical single-domain particle is spontaneously magnetized in a preferred direction, say a-b. The least preferred direction, that is to say the direction in which the spontaneous magnetization would have its largest energy, is say c-d. If a steadily increasing field is applied as shown the magnetization will rotate towards c-d, the field providing the necessary energy. When it reaches a certain direction lying between a-b and c-d, however, instability occurs because further rotation results in a decrease in the magnetic energy which is larger than the accompanying increase in anisotropy energy. The spontaneous magnetization therefore rotates intantaneously into a direction close to the magnetic field. If the applied field is now reversed so also is the rotation process. The hysteresis loop for the particle therefore resembles the illustration in Fig. 13(b). If K is the anisotropy constant, it is not difficult to show that coercivities of the order K/I_s should result, and the permanent magnet powders discussed later do exhibit coercivities approaching this ideal. The anisotropy considered above is magnetocrystalline; it is possible to produce needle-shaped particles which are magnetically anisotropic because of their shape, since the magnetostatic energy in such a particle is least when the magnetization is in the direction of the longest axis. Ideal coercivities for this case are of the order $2\pi I_s$, that is greater than 9,000 oersteds for iron.

(*To be continued*)

†The application of powder specimens in high-frequency inductors and transformers is based on a different principle.

Combined Test Prod and Clip

By C. BAYLEY

Simple Design Allowing the Addition of Screening and an Isolating Capacitor

IN the electronics industry the time lag between the development of new components and of the tools for servicing them is (with the possible exception of the soldering iron) much longer than might be expected. For example, the crocodile clip remains much the same as it was, say, 20 years ago; but during this same period the size of components has been halved at least. Consequently the usual crocodile clip becomes almost useless for anchoring to an ordinary B7G valve base pin for instance, and much time and effort is wasted. Another inconvenience becomes obvious when changing from a prod to a clip. Not only must the tool be changed over, but re-connection of the test lead to the other end is also necessary. Now, when on top of all this we remember that, in general, electronic equipment is far more complex nowadays, we can see that the development of a modern combined test prod and clip seems necessary to help reduce the time required for testing.

This article gives a detailed description of two versions of such a tool. The first consists of a long insulating shaft with a handle at one end from which jaws at the other can be opened by an internal wire. The second version is similar, but with the addition of screening and an isolating capacitor with shorting switch.

General Features Required.—Before we come to the detailed description of the construction let us see what conditions must be fulfilled by a satisfactory design for such a tool. These are as follows:—

1. The jaws of the clip and the whole front part of the tool must be narrow, but yet give a sufficiently strong grip.

2. Changing from clip to prod and vice versa, and also anchoring and disconnecting the jaws from the tested part must be easily carried out with one hand at a distance from the jaws.

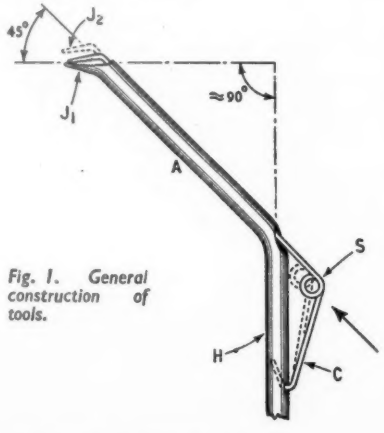

Fig. 1. General construction of tools.

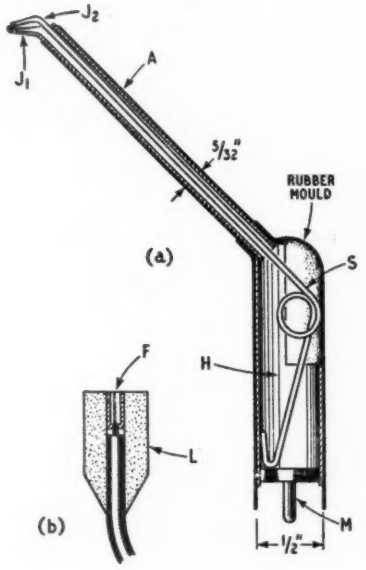

Fig. 2. (a) Construction of simple model. (b) Lead-in to simple model.

3. Convenient application of the tool to the apparatus to be tested must be possible. For example, the tool must not obscure the area under test.

4. The tool must be entirely insulated, with the exception of the small exposed part of the jaws (say ¼in long).

5. In the case of the version with an isolating capacitor, short circuiting this capacity must be readily possible.

6. The tool must be light and dependable.

Principle of Operation.—Fig. 1 shows the basic construction of both models. The top end of the tubular metal arm A is bent through about 45° to form the lower jaw J_1. Steel piano wire is threaded through the arm A to form the movable part of the clip. At the top end this wire is similarly bent through a little more than 45° to form the upper jaw J_2. The jaws J_1, J_2 are normally held firmly together in the prod position by the action of the coil spring S and the portion of the wire C in the handle H. When the coil spring S is depressed in the direction of the arrow the jaws J_1 and J_2 are opened. (The new positions of J_2 and the wire S and C are shown dotted.)

From a consideration of the geometrical shape of such a structure two important points emerge. In

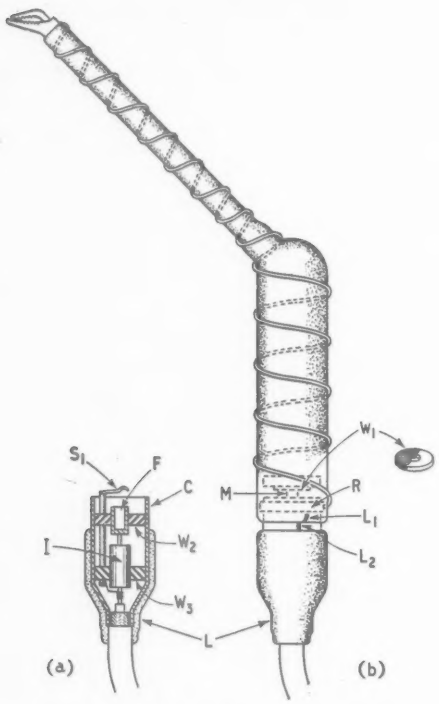

Fig. 3. (a) Construction of screened model. (b) Lead with isolating capacitor.

the first place, the arm A can have any required length: up to, say, 4 inches was found to be convenient. Secondly, taking into account the third design condition, the angle between the axis of the jaws and that of the handle H should be about 90°.

Simple Model.—Fig. 2(a) shows the full construction. The handle H becomes rather complex in view of the requirements of rigidity and overall insulation and yet also for ready manipulation of the spring S. The handle H is made of a metal tube with a single split along its length and with a diameter of roughly half an inch. The tube in the handle H is cut out at the top to give access to the spring S, and the bottom ends in a single-terminal brass plug M. The corresponding brass socket F on the lead L is shown in Fig. 2(b). The use of a plug and socket allows the whole prod/clip to be easily disconnected from the lead and replaced by a different sort of tool. The handle H fits into a rubber mould to provide insulation. The wall thickness of this mould will be about $\frac{1}{32}$in; the exact thickness being determined by the elasticity, as that part of the mould facing the spring S will be pressed in and out when the clip is opened and closed. The socket F is insulated by another rubber mould.

The insulation of the arm A is provided by ordinary sleeving or thin rubber. The diameter of the metal tubing of A must not be smaller than about $\frac{1}{8}$in. The decisive factor here is the thickness of the internal wire which must be sufficient to give adequate gripping action on the jaws, and also to counteract the tendency of the upper jaw J_2 to twist sideways under the weight of the tool and lead. The smallest usable wire diameter is $\frac{1}{32}$in, but best results are obtained with $\frac{1}{16}$in.

Some details of the construction of the jaws J_1, J_2 are also worth noticing. When closed, the end of the lower jaw J_1 should protrude about $\frac{1}{32}$in beyond that of the upper jaw J_2. This means that for an average opening of say $\frac{1}{32}$in the ends are in fact in line. This gives a good grip, and also ensures that the two jaws do not obscure each other. The inner part of J_1 is given a slight protruding curvature. This and the fact that J_2 is bent a little more than J_1 mentioned previously ensures a good grip on small objects. Finally, the internal edges of both jaws are given a set of fine teeth as in ordinary crocodile clips.

Method of Short Circuiting the Isolating Capacitor.—Figs. 3(a) and (b) show the construction of the more elaborate tool. This uses the same basic parts as in the simpler model, except that the ordinary lead and socket L is replaced by a coaxial lead ending in a container C. This houses the isolating capacitor I, the socket F, and a device to short out the capacitor I by simply rotating the lead L through 90° to 270°, relative to the handle.

Good connection between the two parts is secured by the plug M and socket F, and also by a split metal ring R which maintains contact between the metallized shielding of the upper part and the container C. This latter is in turn attached to the metal braid of the coaxial lead. Finally, the rubber mould of the handle overlaps the ring R and clasps the cylindrical surface of C, thus helping to ensure a firm mechanical attachment between the two parts.

A special half-insulated washer W_1 and the contact spring S_1 form the simple device which enables the isolating capacitor I to be shorted out when required. The spring S_1 is connected electrically to the lower end of the capacitor I, through gaps in two insulating washers W_2, W_3 which support the socket F and capacitor I. The top part of the spring S_1 is shaped in a similar way to the contact springs in miniature rotary switches. The half insulated washer W_1 is rigidly fixed under the plug M. When the two halves of the tool are assembled, the top part of the spring S_1 is in mechanical contact with the washer W_1 all the time, but electrical contact can be made only over the non-insulated half of the washer W_1.

The contact positions are identified by lines L_1, L_2 marked on the handle, and lead, such that when L_1 and L_2 are in line the isolating capacitor I is short-circuited. By rotating the lead in either direction through between 90° and 270° relative to the handle the capacitor I is replaced in circuit.

Method of Screening.—Proper screening of such a tool is very important when a.c. tests on high-impedance circuits are to be performed without introducing excessive hum or upsetting couplings. The use of the metal container C enables this to be done for the lead L without any difficulty. However, shielding of the rubber mould round the handle H and arm A is rather difficult as the shield must be pliable at least around the spring S. It has been found that the best method of screening is to cover the arm A and handle H with spiral wound wire preferably stuck to the surface. One end of

the wire is threaded through a small hole in the mould on the handle H to make contact with the metal ring R and thence via C with the braid on the coaxial lead. The whole surface of the arm A and handle H is then painted with gold conducting paint, and, when this is dry, with several layers of insulating paint (such as "Hymeg" made by Berger). This ensures screening properties nearly as good as those provided by orthodox braided sleeving; and even prolonged movement of the shielding over the springs will not upset this screening.

Ionosphere Review 1957

RECORD "HIGH" CONDITIONS

*By T. W. BENNINGTON**

THE monthly average relative sunspot number—continuous records of which go back to January, 1749—has, prior to the present sunspot cycle, exceeded a value of 200 on only three occasions, in May, 1778, December, 1836, and May, 1947, which months were all near high sunspot maxima. During the present cycle the value of 200 was first exceeded in November, 1956, and during 1957 the provisional values for September, October, November, and December, were 218, 259, 211, and 244 respectively, the October value being the highest ever recorded. The "smoothed" sunspot number—determined from a twelve-month running mean of the monthly numbers—has never, prior to the present cycle, exceeded a value of about 159, but during every month of 1957 for which it is yet available it has been greater than this and, in fact, reached about 183 at the epoch June/July, 1957. The point of interest to radio engineers about all this is that it indicates that, during 1957, the solar activity has been extraordinarily high, and it would be expected, therefore, that as a result the ionization in the principal ionospheric layers would be much enhanced, and the usable frequencies for long-

*Research Department, British Broadcasting Corporation.

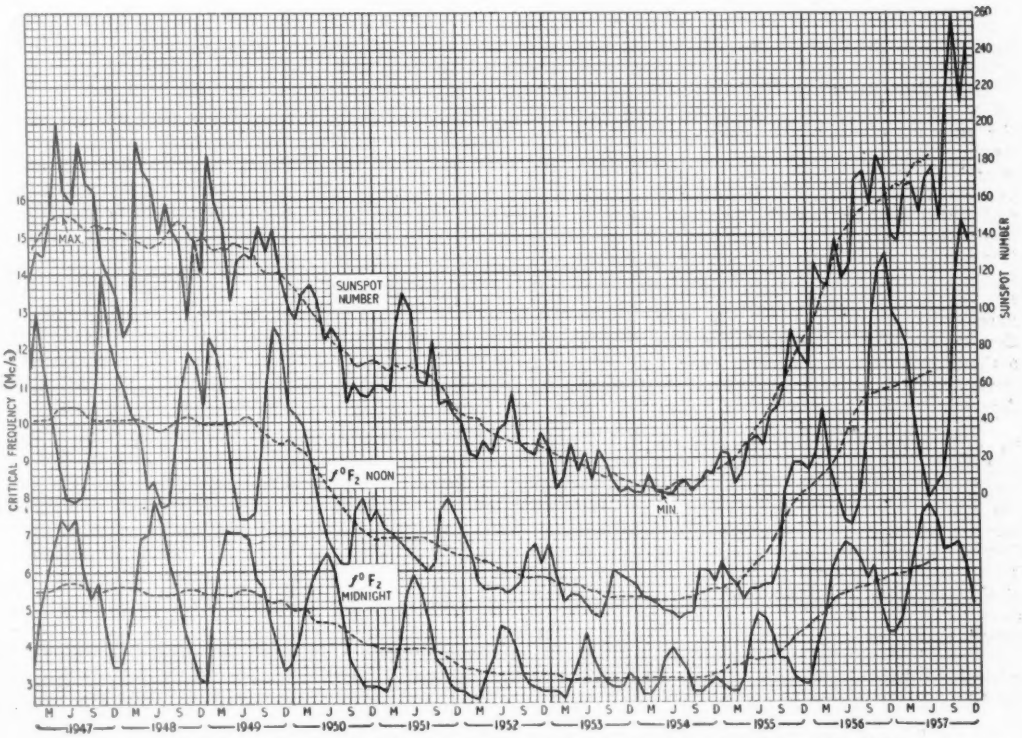

Variations in sunspot activity, with corresponding variations in ionospheric conditions, 1947—1957.

distance communication considerably higher than usual.

It may here be of interest to remark that the "relative sunspot number," which is internationally used as an index of the general solar activity, was instituted by R. Wolf, of Zurich, many years ago, and is derived from observations made at a number of different observatories. The relative number is deduced from these according to the formula:—

$$R = C\ (10G + N)$$

where R is the relative sunspot number, G is the observed number of sunspot groups, N is the total observed number of sunspots, and C is a factor which depends on the telescope used and on other factors affecting the observations. Thus the large groups, which are the most active areas, are suitably weighted as compared with the smaller spots, and the observations from different places are reduced to a common basis. These relative numbers, despite what may seem to be a somewhat arbitrary method of derivation, have been found to correlate well with terrestrial phenomena which depend upon the solar activity.

Course of the Sunspot Cycle.—The variations in solar activity since the last sunspot maximum, and its effects upon the F_2 layer ionization, as indicated by measurements of the vertical-incidence critical frequency of the layer, may be seen from the graphs. The sunspot numbers shown are those published from Zurich, except for the last 12 values, which are the provisional numbers obtained by the Royal Greenwich Observatory. The F_2 critical frequencies are those measured at the D.S.I.R. station, Slough. The full-line graphs are of the monthly values, and the dashed lines give 12-month running mean values, thus smoothing out the seasonal and other variations.

Since the last sunspot minimum in April/May, 1954, the sunspot activity has quickly risen to reach the unprecedentedly high values now prevailing. At the end of 1956 it was thought that the maximum would be a record high one, and that it might occur early in 1957, though, since future sunspot activity cannot be predicted with much accuracy, there was no certainty about this. Though the first of these anticipations proved correct the second did not: in fact, at the end of the year the activity—as indicated by the 12-month average sunspot number—was still rising. We must remember, though, that we can only know this value up to a time six months back, and, since it is from this quantity that the epoch of sunspot maximum is determined, this may still have occurred in 1957.

The average critical frequencies, it is seen, have increased by a factor of just over two since 1954, and, both at noon and midnight during 1957 were considerably higher than at last sunspot maximum. During the autumn the monthly mean critical frequency for noon reached remarkably high values, that of 15.4 Mc/s for November being an example. This would imply a monthly mean m.u.f. for noon of about 43 Mc/s, which would mean that on some days the m.u.f. would be above 50 Mc/s. Such very high m.u.f.s have, in fact, been observed to be occurring in practice. Thus, during 1957, the F_2 critical frequencies and m.u.f.s did indeed follow the rise in solar activity, to reach record high values.

Usable Frequencies.—Practical reception results clearly indicate the effect of the abnormally high solar activity upon radio propagation, the upper frequency limits for long-distance reception having been remarkably high. The highest frequency band for long-distance broadcasting—26 Mc/s—has been usable throughout the year, and the same applies to the 28-Mc/s amateur band. To take, as an example, the North Atlantic circuits, the highest frequencies receivable over these gradually decreased during the spring from the neighbourhood of 45 Mc/s to about 35 Mc/s in April. They further decreased to about 28 Mc/s in July, following on the summer decrease in daytime F_2 layer ionization in the northern hemisphere. By September they had increased again to the order of 40 Mc/s, to over 50 Mc/s in October, and to about 55 Mc/s in November. It is not meant, of course, that these high frequencies were receivable on every day, for, with the high solar activity, a considerable number of ionospheric disturbances occurred and on disturbed days the F_2 layer ionization was much reduced. But on undisturbed days they were often receivable during the periods mentioned, and provide interesting proof of the very high frequency limits for long-distance F_2 layer propagation at times of very high solar activity.

A further interesting example is given by reports of the reception of the Crystal Palace sound (41.5 Mc/s) and vision (45.0 Mc/s) channels at long distances. During the 1956 autumn and early winter the sound channel was occasionally received in Australia and the West Indies, and both channels were being frequently received in West, Central, and South Africa. In the spring of 1957 such reception was again frequent in Africa, but in the summer it became much less so. During October, November, and December, reception again occurred frequently in Africa, and was also reported from a number of places in Canada and the U.S.A. The vision channel was received in Australia in December. Reports from Johannesburg indicate that between 1000 and 1800 G.M.T. signals on the sound channel were obtained for the following approximate percentages of the time: January 2.0, February 23.4, March 59.3, April 61.8, May 22.2, June 14.4, July 10.3, August 8.2, September 22.2, October 47.4, November 28.0. Signals on the vision channel were received for considerably smaller percentages of the time, but their reception followed the same seasonal pattern, i.e., the peak periods being around the equinoxes. By vision channel reception it is not meant, of course, that good television pictures were obtained.

As for 1958, it appears possible that sunspot maximum will have occurred before the year begins and, thereafter, that the highest usable frequencies will start to decrease. But, since it is highly probable that this decrease will be a very slow one, we may expect little change in propagation conditions over various paths as compared with those during similar months of 1957. The daytime frequencies will of course decrease, and the night-time frequencies increase, from present values towards the summer, and next autumn they are unlikely quite to reach the present high values. But, so far as long-distance communication of all kinds is concerned, the highest frequencies actually allocated for the various services should be usable over one circuit or another throughout the year. And there is every probability that "quasi maximum" radio conditions will prevail throughout 1959 as well.

AN OUTSTANDING OSCILLOSCOPE

from the E.M.I. Range

TYPE WM2

(complete with plug-in pre-amplifier)

A versatile wideband oscilloscope well suited to a variety of applications—such as production testing, single shot photography and design and maintenance work on radar, television and computers.

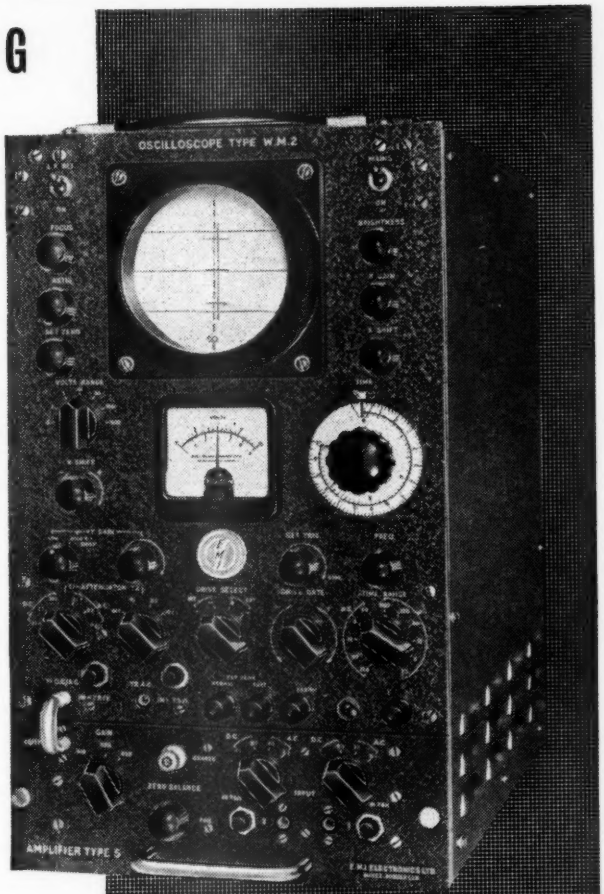

- **Direct time and voltage measurement with 2% accuracy**
- **Differential inputs**
- **Built-in signal delay**
- **Bandwidth DC to 12 Mc/s**
- **Y sensitivity at full bandwidth 100 mV/cm**
- **Maximum Y sensitivity 3 mV/cm**
- **Maximum sweep speed 40 cm/μS**
- **EHT 6 kV on 5″ CRT**

TYPE WM2

IMMEDIATE DELIVERY

Price £285 *(Plug-in pre-amplifier £75)*

If you would like further information, please telephone or write to:—

E.M.I. ELECTRONICS LTD.

(INSTRUMENT DIVISION) · HAYES · MIDDLESEX · Telephone SOUthall 2468 Ext. 1071 & 655

EE128

The first frequency changer valve specially designed for printed circuit turret tuners

The use of printed circuits in television turret tuners offers attractive advantages both from the quality and performance of the product and the reproducibility of performance. Printed circuits, however, limit the scope of wiring connections mainly to two dimensions instead of the three dimensional freedom of normal wiring and the existing connections of frequency changer valves are not very suitable for use with the existing cascodes. In order to realise the expected improvement in performance both the basing connections of the pins and the internal connections in the valve have to be optimised. The new Ediswan Mazda 30C13 has been specially designed to overcome these problems and give improved performance in gain and stability, particularly in Band III. Samples and preliminary technical information on the 30C13 will be available at an early date to Set makers only. Our Application Laboratories will be pleased to discuss your problems.

EDISWAN

MAZDA

valves and cathode ray tubes

SIEMENS EDISON SWAN LTD.
VALVE AND CATHODE RAY TUBE DIVISION
155 CHARING CROSS ROAD · LONDON · W.C.2

An A.E.I. Company

LETTERS TO THE EDITOR

The Editor does not necessarily endorse the opinions expressed by his correspondents

Loudspeakers in Parallel

I WOULD like to reply to the two letters in the December 1957 issue commenting on the article "Loudspeakers in Parallel. Increase of apparent source size is not one of their advantages" (October issue).

Anyone who differs from Mr. G. A. Briggs on a subject like this has the dice heavily loaded against him but I will try my luck. As the title implies, the contribution was intended to draw attention to what I think is a contradiction of the obvious conclusion, and it was not intended to be a condemnation of paralleled units, for on almost every other score two units in parallel have advantages over a single unit.

Mr. Briggs agrees with me on the assumption that I intended that directional speakers are used, but strangely enough (and hence the article) I think the conclusions are valid for omni-directional sound sources. If I put two similar speakers up side by side and connect them in parallel I can hear only the nearer speaker. In short, the position of the virtual sound source is that of the nearer speaker, but the loudness is due to the resultant output of both speakers. This is true (I believe) irrespective of the spacing of the units. If anybody has tried this and finds that there are conditions in which it is not true I will be pleased to hear from them.

I heard Mr. Briggs' last demonstration at the Festival Hall and I noted that the sound source always appeared to be located in the nearer speaker, though I have no doubt whatever that the presence of the other speakers were advantageous in other directions. There is a simple but striking demonstration of the effect using a line source speaker which may have up to 20 similar loudspeaker units handling the same signal.

If this is laid down horizontally and the listener stands in front of it he will find that the apparent position of the sound source is that of the nearer speaker, i.e. the one directly in front of him, and that this moves along as he moves parallel to the source.

If the two units differ in the response, then the sound source is stretched; but other troubles, a ragged frequency response and a disembodied-voice effect, begin to appear. These effects get worse as the difference in response between units increases. The separation at which a balance is struck is a personal compromise.

One of the advantages claimed for spaced speakers is, as Mr. Briggs mentioned, the question of the reduction of standing wave patterns. I hope to document this aspect in the near future.

The letter from Mr. Barzilay is a more difficult problem. I think he is implying that there are conditions in which two loudspeakers appear larger than one, but as he does not state what these conditions are I cannot comment.

Rugby. J. MOIR.

Mr. Briggs comments:

I agree with Mr. Moir that in a small room the sound seems to come from the nearest speaker when two or three ordinary or semi-directional types are switched on, but I find that this effect can be largely overcome by facing the speakers obliquely towards a wall and listening to reflected sound.

As regards our last Festival Hall demonstration, we had four speakers spaced very widely apart on the platform, because this seemed to give us the nearest simulation of the actual orchestra. Again, I agree with Mr. Moir that perhaps one-third of the audience would place the sound in the speaker nearest to them; but I think the remainder of the audience sitting in the centre and at the back of the hall would find the sound coming from all four speakers, because the difference in distance would not affect the issue. I remember that we always sat at the back of the stalls for our listening tests at rehearsal, and I certainly got this impression. Actually, front and side seats are not really satisfactory for listening to loudspeakers.

Idle, Yorks. G. A. BRIGGS, Wharfedale Wireless Works, Ltd.

Tape Speeds

THERE are two comments that I think can usefully be added to "Free Grid's" interesting note, "Irritating Irrationalities," in your January issue. In this he commented on the curious fact that, throughout the world, supply voltages are rated in multiples of 11 and suggested that this derives ultimately from the 1.1 volts of the Clark cell. He then went on to discuss what he referred to as the "insane illogicality" of the standard tape speeds, $7\frac{1}{2}$, $3\frac{3}{4}$, $1\frac{7}{8}$ (and so on) in/sec now being used for magnetic recorders and surmised that this practice arose from successive halvings of an original tape speed of 30 in/sec. This is, of course, largely the case but, as so often happens, the truth is rather less simple and rather more interesting than it appears.

It is true that 30 in/sec was the speed generally used in this country and the U.S.A. in the middle and late 1940s but it was a very close approximation to the standard speed that had already been adopted in Germany. The German standard was naturally a metric one and it was, as "Free Grid" would have wished, a whole number; but what seems a little curious and does not appear to have been explained is why the precise value chosen was 77 cm/sec. I think that we can hardly blame the Clark cell in this case.

As regards the second point, I think that "Free Grid" will see on reflection that it is not always right to suppose that saneness and logicality require the use of specifications expressed in whole numbers. A cake recipe which called for $1\frac{7}{8}$ eggs would certainly be undesirable and equally a standard which implied a.c. motors with shafts rotating at 1,655 r.p.m. on a 50-c/s mains supply would be inconvenient. In the case of tape recording and reproducing machines, however, the tape is almost always friction driven by a spindle which must in any case have an "odd" diameter and it is difficult to see any practical advantage that would attach to the use of a speed of one instead of $1\frac{7}{8}$th in/sec or of two instead of $1\frac{7}{8}$ in/sec.

In any case it must surely be accepted that if the inch-using countries were to have "sane and logical" tape speeds, expressed in whole numbers of inches per second, and if the metric countries were to be equally "sane and logical" in centimetres then we would not have international interchangeability and this would hardly be either sane or logical.

It is perhaps worth adding, "for the record" so to speak, that there was a period in the late 1940s when two slightly different versions of the same nominal tape speed existed side by side, that is to say 30 in/sec in U.K. and the U.S.A. and 77 cm/sec (or 30.16 in/sec) in the European countries. While not wholly irrational this was certainly irritating if only because of the differing durations of nominal half-hour recordings when made in one country and replayed in another. The first steps towards international standardization of the speed and other characteristics of magnetic tape recording were taken at a meeting of the representatives of a number of broadcasting organizations that was held in Berne in 1950. As a result it was agreed that all organizations would adopt the standard tape speed of 76.2 cm/sec (30 in/sec) and any slower speeds to be used in the future would be in a geometrical progression with a ratio 2:1. This has since been formally adopted as a world standard by the International Electrotech-

nical Commission so that the standard tape speeds are the same in all countries. In the inch-using countries they are expressed as 30, 15, 7½, 3¾, 1⅞ . . . in/sec and in metric-using countries as 76.2, 38.1, 19.05, 9.525, 4.7625 . . . cm/sec.

H. DAVIES,
London, W.1. B.B.C. Engineering Division.

Line Scan Ringing

MR. K. E. MARTIN'S letter in the December, 1957, issue notes early efforts in tuning leakage reactance of the television line scan transformer. For the record, my work on this feature resulted in the tuned line-scan/high-voltage transformer design incorporated in the Bendix Radio Division of Bendix Aviation Corporation's first commercial television receiver, Model 235M1, developed in 1947-1948 (marketed in 1948). This design employed tightly coupled primary/secondary windings, a high-build "narrow cam" tertiary. The core of the Bendix transformer was of powdered iron of the cartwheel-and-split-hub variety; this was prior to my investigation of ferrite cores in 1948 at the General Electric Company, resulting in the Model 77J1 transformer. The Bendix development is recorded in my notebooks remaining with Bendix Radio Research Laboratory in Baltimore.

A realization of the importance of the critical coupling of the tertiary and impedance relationships in the output circuit struck me forcibly at that time, as I noted the reduced driver and damper valve peak voltages resulting from correctly phased harmonic content. That the early Bendix coil was fairly in-tune was the basis of use with it of pressed-stem single-ended damper valves (operating at less than 2 kV anode-to-cathode), the first 6W4-GT diodes commercially available to Bendix supplied by National Union Co. This low-surge voltage introduction of the 6W4 to commercial use was followed by later insulation improvement with button-stem construction, and improved ratings.

The horizontal sweep-output valves initially selected were single-ended auto-radio output valves, two type 7A5, used in parallel. The later introductions of the G.E. 6AV5 and RCA 6AU5 were based on maintaining the driver surge at low levels, as results from harmonic reduction of the fundamental peak voltage at the driver plate. Retention of the transformer tuning allowed single-ended driver tubes to be upgraded from 50 deg sweep to 90 deg sweep as demonstrated with my paper presentation at the I.R.E./R.T.M.A. Fall Meeting at Syracuse, New York, in 1952, also emphasizing core "d.c. de-saturation."

Contemporary with my development at Bendix, independent work by R. B. Gethmann at the General Electric Company led him to devise a tuned TV transformer based on a closed, laminated core loop, one leg of which contained layer-wound primary and secondary coils, the h.t. overwind being a layer-wound tertiary coil mounted on the opposite leg and properly poled for additive fundamental voltage surge, tuned to minimize the primary voltage crest with harmonic adjustment. These tuned transformers were used in G.E.'s early post-war television receivers.

CHARLES E. TORSCH,
Chief Television Engineer,
Cleveland, Ohio, U.S.A. The Rola Company, Inc.

"Do It Yourself" Interference

THOUGH I did not view the television Children's Hour series on how to make a simple radio receiver, referred to by Douglas Walters in his letter in your December issue, I feel he is trying to "damp" the "wave" of youth's enthusiasm for scientific knowledge.

It is possible that in the years to come we may owe Gilbert Davey gratitude for several hundred additional engineers in the electronics industry, thanks to the spark of interest produced by a boy's "Do-it-yourself" radio receiver.

In the early nineteen-thirties, several of my young friends and myself were helped by our fathers and neighbouring friends with the gifts of radio junk, which to us at that time was more valuable than gold. My happiest days were spent winding a coil on an old ebonite former, with the end of the "cotton-covered" tied to the door handle, plus the frantic efforts to get my one-valver to work. This, with a valve that cast strange patterns on the wallpaper in the failing December light, and a neighbour, pipe in mouth, finding where I had erred, was true happiness.

Yes, those eleven-plus years of mine and young radio friends are long remembered. All served in radio during the second World War, and are professional radio men at the present time, thanks to a one-valve regenerative detector.

No! Douglas Walters, let's tolerate a few squeaks in our 'Ohms, to the furtherment of electronics.

PETER STARK LANSLEY,
Communications Officer,
Ministry of Transport & Civil Aviation.
Southampton (Eastleigh) Airport.

TV Whistle

IT would seem that the viewing of your correspondent, Mr. D. A. Thoms (January issue), has not yet been extended to a Peto Scott receiver. For some years now, these receivers have incorporated a direct drive type of line time base, which allows the use of a line output transformer core consisting of a single Ferroxcube rod. Most line time base whistle comes from the joins of the two halves of the closed loop core of the conventional auto transformer where, if the gap is not completely rigid, the magnetic effect of the alternating flux causes slight movement and hence the whistle. In the direct drive system, this gap is obviously non-existent and, in consequence, very little whistle indeed is produced.

BRIAN G. SCOTT,
Weybridge. Peto Scott Electrical Instruments, Ltd.

Optical Noise Filter

"STOPPING down" a lens limits its effective optical area. As only the centre portion is in use, this area of the lens in the human eye is more truly spherical. Objects lying in the same plane form images at the focal point (retina) more exactly than when subject to the distortion due to the less exactly spherical portion near the periphery of the lens.

You may say "why not wear two pin-holes instead of spectacles?" This would improve our vision if we were prepared to carry the odd arc lamp around to make up for a subsequent loss in illumination!

Colchester. E. A. SHAW.

SURELY the effect mentioned by your correspondent T. G. Clark in the January, 1958, issue, namely, the improvement in clarity of an object when viewed through a small aperture, is due to the increased depth of focus thus obtained. This is because the small aperture permits only those rays which are close to the axis of the eye's lens to be refracted.

If the rays farthest from the axis are excluded by the introduction of a small aperture, the image formed by the remaining rays on the screen is clearer, although still out of focus, and much dimmer.

This is similar to the "pin-hole camera effect," and makes the eye less dependent on its lens for focusing.

This would seem to explain the apparent improvement in television picture contrast and resolution when viewed through a small aperture, but the "noise filter" effect is not so obvious, since the pin-hole acts as an attenuator rather than a filter.

The "reality" of a television picture is increased when viewed through *one eye* only, due to the fact that one sees everything in two dimensions, and a 2-D picture therefore appears more "real." This could partly explain the improvement noted.

New Malden, Surrey. DAVID M. LINDSLEY.

Technical Notebook

New Potting Compound said to have good electrical properties and high resistance to mechanical shock can be formed *in situ* by mixing castor oil with an organic isocyanate made by I.C.I. under the name Suprasec. The result of the chemical reaction is an amber-coloured opaque material which is rather like rubber except that it does not bounce. The lack of bounce when a potted electronic unit is dropped on the floor is somewhat alarming, but all the shock is said to be taken up by the material. Useful compounds such as flexible and rigid foams, soft and hard rubbers, lacquers, insulating compositions and adhesives can also be made *in situ* by mixing other polymeric reactants with the isocyanates. It is possible, for example, to fill awkwardly shaped cavities with foams or other materials, say, for insulating purposes, simply by pouring in the appropriate quantities of the two chemicals.

Thin Wire Permanent Magnets of only 5 mils in diameter have been cold drawn from a ductile magnet alloy called Cunife by I. L. Cooter and R. E. Mundy of the American National Bureau of Standards. Normally, of course, most commercial permanent magnet alloys have to be cast or sintered into the required shape because of their hard and brittle nature. Cunife, however, can be cold worked; and even if this is done to the extent of affecting adversely the magnetic properties of the material the characteristics can be substantially improved again by subsequent heat treatment. Values of coercivity, retentivity and maximum energy product for various diameters of the cold-drawn and heat-treated thin wires are given in the December, 1957, issue (Vol. 59, No. 6) of the *Journal of Research of the National Bureau of Standards*. As an example, the graph shows how the coercive force H_c, and residual induction, B_r, of 0.005-in diameter wire magnets vary with different temperatures of heat treatment. The composition of Cunife, incidentally, is 60 per cent copper, 20 per cent nickel and 20 per cent iron.

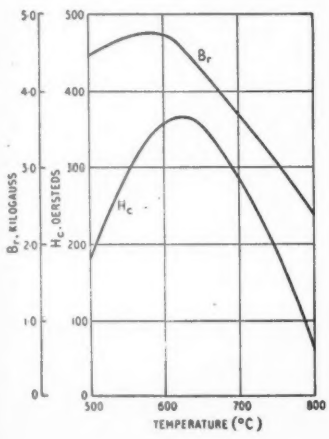

Magnetic-Line Propagation along the earth's field lines and passing well outside the usually accepted limits of the ionosphere has for some time been postulated for audio frequency "whistler" atmospherics (see *Wireless World* for July 1953, p. 338). Recently such propagation has been demonstrated for ordinary radio waves by Stanford University, according to a report in *Electronics Business Edition* for December 10th, 1957. A pulse-coded signal transmitted on a frequency of 15.5 kc/s from Annapolis in Maryland was received twice at Cape Horn: once by ordinary ionospheric propagation and the second time 0.7 second later and 10 to 30 dB weaker by "whistler" magnetic-line propagation.

Drift Transistors are high-frequency types, basically of alloyed construction, in which the transit time of the current carriers is reduced (and hence the cut-off frequency raised) by a "built-in" accelerating electric field. This field is produced by a special graded distribution of the impurities in the base region achieved during manufacture. As well as accelerating the current carriers, it also tends to reduce the collector capacitance, while the high average density of impurities in the graded base tends to give a low value of base resistance—both useful features for high-frequency operation. The alpha cut-off frequencies obtained are usually of the order of tens of megacycles. As an example, the new RCA drift transistors 2N370, 2N371 and 2N372 have an alpha cut-off frequency of 30Mc/s in the common-base connection (see characteristic). The 2N370 and 2N372, which are intended for r.f. amplification and r.f. mixing respectively, will give a maximum power gain of 17dB at 20Mc/s in typical operation in a common-base circuit (or 26dB at 10Mc/s). The 2N371 is intended for use as an r.f. oscillator for frequencies up to 23Mc/s. All three types incorporate shielding to minimize capacitance between leads and coupling to adjacent components. This is provided by a fourth lead situated between the collector and base leads and connected internally to the metal case.



Sensitive Displacement Transducer, designed by Salford Electrical Instruments for measuring small changes in radii of curvature, will detect movements as small as 2.5-0-2.5 thousandths of an inch. It is an electromagnetic type of transducer. A central stylus controls the position of a magnetic armature disc which is mounted in a gap between two pairs of coils. Each pair of coils is wound as a transformer and mounted in a high-permeability magnetic pot core. A constant alternating current is arranged to flow in the primary winding of each transformer and the output of the differentially connected secondary windings is fed to the moving coil of a dynamometer indicating instrument. Any movement of the armature disc causes a corresponding change in the mutual inductance of the coils, with a resultant increase or decrease in the current to the indicating instrument. A battery of 60 of these transducers is being used in the Royal Aircraft Establishment's new wind tunnel at Bedford as part of an automatic safety check on the strain in the steel plates which form the throat of the tunnel.

Variable Star Detector, using a flying-spot scanner is described by J. Borgman in *Philips Technical Review*, Vol. 19, No. 4. Using a partially silvered mirror, the light beam from the raster of the scanner is split into two parts which, after being focused, separately scan two negatives photographed at different times of the same region of the sky. The resulting transmitted images are then focused on to two photo-multipliers. The signals from these are

subtracted and used to intensity-modulate the beam of an ordinary television c.r. tube. The sweep voltages of the picture tube and flying-spot c.r.t. are synchronized. Where the two negatives are different the signals from the two photo-multipliers will not be the same, and, when subtracted, will thus produce a mark on the picture tube corresponding to the position of the star. This will happen where the image of a star of variable luminosity is different on the two negatives owing to their different times of exposure. This provides a more rapid and certain method of variable star identification than the similar viewing by eye of a superposition of negative and positive, or viewing the rapid interchange of two photographs (blink microscope) where intensity changes will show up as changes in image size.

Transparent Magnetic Oxides known as rare-earth-iron garnets, permitting the internal magnetic domain structure to be seen with a polarizing microscope, have been discovered at the Laboratoire Electrostatique et de Physique du Metal of the Institute Fourier in Grenoble, France, and independently at the Bell Telephone Laboratories, U.S.A. Most magnetic materials are, of course, opaque to light and their internal magnetic structure is not visible. The manner in which magnetic domains are oriented within them has been inferred from reflection of polarized light by their surfaces or by delineating domain boundaries at these surfaces with colloidal magnetic oxides. Yttrium-iron garnet is the most completely studied member of the new garnet family. It has a Curie temperature of 545°K, as compared with 848°K for magnetite, and a spontaneous magnetization at zero temperature. Of great interest is the fact that it contains magnetic ions with but a single valence. Both x-ray and neutron diffraction studies have shown clearly that, unlike the ferrites, the interactions between identical magnetic ions wholly occupying two different crystallographic sites are responsible for ferrimagnetism in the garnet structure. In yttrium-iron garnet the width of the ferrimagnetic resonance absorption lines at 9,300 and 24,000Mc/s depends on crystallographic direction. Line widths of only 0.8 oersted were observed in thin discs at 10,000Mc/s, when the temperature was held at 540°K. These line widths increased with decreasing temperature and passed through peak values of several hundred oersteds between 65°K and 4.2°K. A polarized light beam passing through the transparent magnetic domains in rare-earth-iron garnets has its plane of polarization rotated in one direction in one domain but in the opposite direction in an adjacent and oppositely magnetized domain. This Faraday rotation is wavelength-dependent and amounts to several degrees per mil of thickness. It makes the domains within the crystals clearly visible. The internal domain structure can, therefore, be studied over a wide range of temperatures and magnetic field conditions. Thus, it has now become possible to correlate Faraday rotation in a magnetic material with spectroscopic data over a broad temperature range.

Hall-Effect Compass described by I. M. Ross, E. W. Saker and N. A. C. Thompson in the *Journal of Scientific Instruments* for December, 1957, depends on the voltage developed across a crystal of indium antimonide when a steady current is passed through it in the presence of the earth's magnetic field. The voltage output passes through maxima and minima as the crystal is rotated in azimuth and can be read on a galvanometer. The principle was first demonstrated by Righi over 70 years ago, using bismuth, but the recent emergence of materials like germanium with much greater Hall efficiency has made it a more practical possibility. Where temperature is not important germanium does, in fact, give the best voltage output, but indium antimonide gives better power output and sensitivity. The compass actually consists of a small slice of InSb crystal about 5-10 mils in thickness with electrodes electroplated on the edges. This is mounted in resin between Permalloy C polepieces, into which are screwed two 12-inch "concentrator" rods of the same high permeability material for collecting the earth's field and increasing the power output. With a current of 1 amp passing through two of the electrodes on the crystal, a 1° deflection from E-W orientation gives an open circuit voltage of 0.12 mV across the other two electrodes. The device is not very suitable for a direct-reading compass because of ambiguities in the readings, but has possibilities for null indication and, arising out of this, for servo operation, in which the compass card is automatically kept in correct alignment, and for automatic steering of small craft.

Multi-stable Transistor Circuits, using direct-coupled combinations of n-p-n and p-n-p transistors, have been devised by M. J. Wier, of Illinois University. The design principles are the same as used for bistable circuits and are described in D.S.I.R. unpublished report PB 122983*.

Half-Century Time Constant.—The insulation resistance of the 1-μF plastic film dielectric capacitors mentioned in our December, 1957, issue (p. 595) was given incorrectly as 1.5×10^7 ohms. It should, of course, have been 1.5×10^9 *meg*ohms.

The Tecnetron is a new French semiconductor device said to be capable of amplifying frequencies up to 1,000 Mc/s. Developed by M. Teszner at the National Centre of Telecommunications Studies, it consists of a 2-mm germanium rod, 0.5 mm in diameter, and has a narrow neck in the middle which is surrounded by a tiny ring of indium. Current passed from one end of the rod to the other can be controlled by a signal applied to the indium electrode. The action is said to depend on an internal field, and the device appears to be somewhat similar in its mode of operation to the field-effect transistor.

* Obtainable from the Lending Library Unit of the D.S.I.R., 20, Chester Terrace, Regent's Park, London, N.W.1.

ASSOCIATED ILIFFE TECHNICAL BOOKS

"WIRELESS WORLD" PUBLICATIONS

	Net Price	By Post
ABACS OR NOMOGRAMS. A. Giet. Translated from the French by H. D. Phlopen and J. W. Head	35/-	36/-
TELEVISION RECEIVING EQUIPMENT. W. T. Cocking, M.I.E.E. 4th Edition	30/-	31/9
TRANSISTOR A.F. AMPLIFIERS. D. D. Jones, M.Sc., D.I.C., and R. A. Hilbourne, B.Sc.	21/-	21/10
WIRELESS SERVICING MANUAL. W. T. Cocking, M.I.E.E. 9th Edition	17/6	18/3
SECOND THOUGHTS ON RADIO THEORY. "Cathode Ray" of *Wireless World*	25/-	26/1
RADIO LABORATORY HANDBOOK. M. G. Scroggie, B.Sc., M.I.E.E. 6th Edition	25/-	26/9
GUIDE TO BROADCASTING STATIONS 1957-58. Compiled by *Wireless World*	2/6	2/11
BASIC MATHEMATICS FOR RADIO AND ELECTRONICS. F. M. Colebrook, B.Sc., D.I.C., A.C.G.I. Revised and enlarged by J. W. Head M.A.(Cantab.). 3rd Edition	17/6	18/6
PORTABLE TRANSISTOR RECEIVER. S. W. Amos, B.Sc. (Hons.), A.M.I.E.E.	2/6	2/10

A complete list of books is available on application

Obtainable from all leading booksellers or from

ILIFFE & SONS LTD. Dorset House Stamford Street London, S.E.1

MARCONI TELEVISION RECORDING EQUIPMENT

TYPE BD679 RECORDING CHANNEL

16mm film presents a most economical and flexible means of recording television pictures since film costs are low, developing and printing techniques are advanced and a wide range of fine grain film stocks are readily available. Projection, editing, viewing, dubbing and handling are all easily carried out with standard equipment. The Fast Pull-down technique presents great advantages over other systems of recording on film but the mechanical difficulties of moving the film in the short period of frame blanking have hitherto prevented the employment of the technique. These problems have now been successfully overcome by Marconi's.

Features

Exceptionally high picture quality.

Specially developed gearbox enables Fast Pull-down technique to be employed. F.P.D. Mechanism has given over 3,000 hours trouble-free operation.

Pull-down time adjustable, normally set at 2 milliseconds permitting recording of fully interlaced picture. Simple single-lens optical system avoids loss of contrast.

Sound can be recorded on optical track, magnetic stripe or separate synchronous magnetic track.

Conveniently placed input selector switches, monitor and level controls. Sound/Vision cueing device incorporated.

Recording can be made on positive or negative stock of a wide variety, either direct positive, direct negative or reversal. Magazines hold 2,400 ft. (2,000 ft. magnetic stripe) or film may be fed directly into a rapid processor.

MARCONI

COMPLETE SOUND AND TELEVISION BROADCASTING SYSTEMS

MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED, CHELMSFORD, ESSEX, ENGLAND

PERFORMANCE ASSURANCE WITH

COSSOR

PRINTED CIRCUITS

AN INSTRUMENT RANGE IN KIT FORM

Q. *Why has Cossor Instruments decided upon this innovation ?*

A. To make available a range of first-class measuring instruments **at a considerable saving in cost to the Buyer.**

Q. *Are Kit instruments inferior in performance to their Factory-built equivalents ?*

A. Certainly not. If assembled and wired exactly in accordance with the Manual of Instructions.

Q. *A certain skill must, surely, be required to build these instruments ?*

A. None beyond the ability to use a small soldering iron.

Q. *How can a performance specification be maintained without setting up test equipment ?*

A. Largely by the use of PRINTED CIRCUITS which allow no interference with the layout of critical parts of the circuit.

Q. *How many Kit instruments are at present available ?*

A. Three. Two Oscilloscopes, a Single-Beam and a Double-Beam, and a Valve Voltmeter. Others will follow shortly.

Q. *Could I have more information on these interesting instruments ?*

A. With the greatest of pleasure. Just write to :

Model 1071K ***Double Beam*** *Kit Oscilloscope*

List Price £69.0.0.
Hire Purchase Facilities.
Trade terms on application.

COSSOR INSTRUMENTS LIMITED

The Instrument Company of the Cossor Group

COSSOR HOUSE · HIGHBURY GROVE · LONDON, N.5

Telephone : CANonbury 1234 (33 lines) Telegrams : Cossor, Norphone, London Cables : Cossor, London

Pulse-Type Frequency Measurement

By J. C. MULLER,* B.Sc.(Eng.)

Apparatus for the Checking of Crystal Oscillators

PROBABLY the most accurate method of frequency measurement involves comparison of the unknown or test frequency with some known standard and counting the resultant low-frequency beat. This takes place either by provision of a fundamental standard frequency of the same value as the test frequency, or through suitable translation of either the test or the standard frequency to provide the required beat.

The general method of multiplication of frequencies is through harmonic generation, for which several well-known methods exist, all involving deliberate distortion of the fundamental and then selective amplification of the required harmonic frequency.

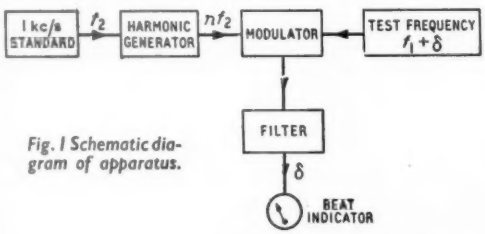

Fig. 1 Schematic diagram of apparatus.

A well-known frequency generating equipment employs 4 kc/s pulses generated by means of a saturable reactor[1]. Harmonics up to the 27th and 28th have a substantially constant amplitude, giving rise to a highly efficient generator.

During discussions about the use of low-frequency counters it has been suggested that a method of using a 1-kc/s pulse generator for frequency measurement be employed.

The project was first investigated as a possible means of comparing, approximately, known crystals against a standard. For example, suppose that a crystal has a frequency known to be $f_1 \pm \delta$, where δ is a very small deviation (fraction of 1 cycle per second), and it is required to determine δ. If this frequency is mixed with a standard frequency f_1 a beat of frequency δ will result, which can be counted, visually or by means of a low-frequency counter. The standard f_1 may be derived as an nth harmonic of a suitable low-frequency standard f_2, which means that a range of standard frequencies nf_2 is available.

In the particular case, all test frequencies of interest were integral multiples of 1 kc/s which was adopted as a suitable fundamental. The mixing process produces a series of modulation products, but, provided the mixer is followed by a suitable low-pass filter, only δ will appear in the output. Fig. 1 shows the proposed set up.

Harmonic Generator.—The frequencies of interest covered from 60 kc/s to 600 kc/s, a useful band in carrier telephony, therefore involving harmonics up to and including the 600th. From the Fourier series for a rectangular wave as shown in Fig. 2:—

$$\text{Average value } A_v = \frac{1}{T}\int_0^T F(t)\,dt = \frac{Ad}{T}$$

Amplitude of the nth harmonic

$$C_n = 2A_v \left[\frac{\sin \frac{n\pi d}{T}}{\frac{n\pi d}{T}}\right]$$

Plotting C_n against the harmonic number results in the graph shown in Fig. 3. This shows that a rectangular wave of given width and repetition period contains harmonics only up to, but excluding n_o where n_o is the value for which $C_n = 0$.



Fig. 2 Rectangular waveform.

Calculation showed that at a pulse repetition frequency of 1 kc/s a rectangular pulse of 1 μsec duration is required to give a reasonable performance at 600 kc/s.

Initially a saturable reactor was used to generate the pulse. This leads to a very simple circuit but it proved unsatisfactory for the short pulse required.

A convenient method proved to be by means of a delay line[2]. It can be shown that a wave travels along a transmission line with a finite velocity given by $\frac{1}{\sqrt{LC}}$ where L and C are the inductance and capacitance per unit length of the line. Any wave impressed on a line will therefore take a finite time to travel a certain distance or will reach the far end after a finite delay. If the wave is reflected at the far end and the line is loss-less, it will reappear at the near end after a time equal to twice the delay. If the required delay time exceeds a



Fig. 3 Harmonic amplitude plotted against harmonic number.

*G.E.C. Telephone Works, Coventry.



Fig. 4 Low-pass filter as a delay line.

small fraction of one microsecond, however, the cable becomes inconveniently long; thus, e.g. a polythene cable for a 1 μsec. delay is 200 metres long. In these cases lumped parameter lines are used, the simplest being a low-pass network. For the network shown in Fig. 4(a) it can be shown that

$$Z = \sqrt{\frac{L}{C}}\left(1 - \frac{\omega^2}{\omega_c^2}\right)^{\pm\frac{1}{2}}$$

according to whether the termination is mid-series or mid-shunt.
Phase shift in the pass band is

$$B = 2n \tan^{-1}\left[\frac{\omega_c^2}{\omega^2} - 1\right]^{-\frac{1}{2}}$$

$$= 2n \sin^{-1}\left(\frac{\omega}{\omega_c}\right)$$

where ω_c = critical angular frequency $= \frac{1}{\sqrt{LC}}$

n = number of complete sections.
At low frequencies the following approximations can be made:

$$Z \doteqdot \sqrt{\frac{L}{C}}$$

and $$B \doteqdot \frac{2n\omega}{\omega_c} = \omega 2n\sqrt{LC}$$

The delay $= \frac{dB}{d\omega} \doteqdot 2n\sqrt{LC} = \sqrt{L_t C_t}$

where L_t and C_t are the total inductance and capacitance. The phase curve $\sin^{-1}\left(\frac{\omega}{\omega_c}\right)$ is concave upwards so that $\frac{dB}{d\omega}$ increases continuously with frequency. A more linear phase characteristic and hence a more constant delay is obtained using the m-derived structure, as shown in Fig. 4(b), with $m = \sqrt{1.5} = 1.23$.

To produce the pulse the line is discharged through some form of switch operating at the required repetition rate. In this case a small thyratron was used. The thyratron is normally biased to a suitable voltage and is non-conducting, with the anode at supply voltage. A trigger voltage is applied to the grid and on reaching the set value triggers the valve. A heavy current flows resulting in a large volt drop across the anode resistor. The anode voltage decreases to the point where the valve cuts off again and abruptly rises back to supply level. The pulse-forming network may ideally be represented as in Figs. 5(a) and 5(b).

Fig. 5(a) represents the condition during charging of the line, i.e. with the thyratron non-conducting. Switch S is open and point a is at supply potential V_s. The line charges through resistance R to this potential.

When S is suddenly closed due to the thyratron conducting, a circuit is formed with the transmission line charge and resistance R, equal to the characteristic impedance of the line, in series, resulting instantaneously in equal volt drops across R and Z equal to $\frac{V_s}{2}$. The voltage wave of magnitude $\frac{V_s}{2}$ travels along the line and is reflected at the unterminated end, suffering a reversal in sign. After a time $2\frac{dB}{d\omega}$ it reappears at the input end and cancels the voltage across R. The result is that a voltage of magnitude $\frac{V_s}{2}$ appears for a period $2\frac{dB}{d\omega}$ across R and is then suddenly cancelled. This happens once per cycle of trigger voltage. With a well-designed delay line, and provided the repetition period is long compared to the de-ionizing time of the thyratron, near perfect rectangular pulses can be generated.

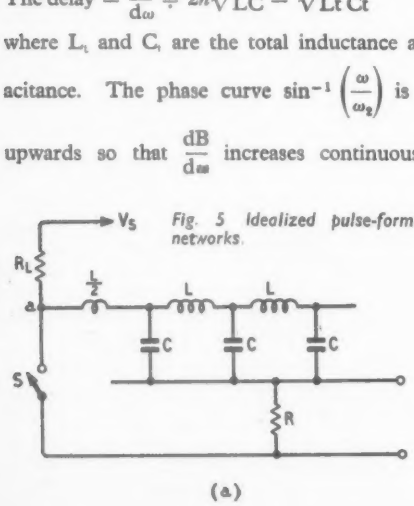

Fig. 5 Idealized pulse-forming networks.



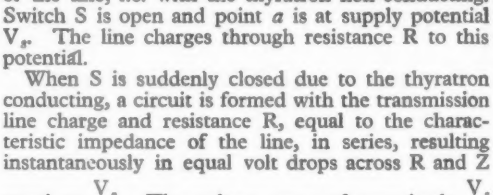

Fig. 6 Modulator circuit.

In order to obtain a beat of sufficient amplitude it was found necessary to amplify the pulse appreciably. This presented a problem since the pulse generated had an amplitude of approximately 10 volts. Further, due to the unequal amplitudes of the harmonics, the low-order harmonics

tended to overload the modulator, resulting in poor mixing at the high frequencies. It was, therefore, decided to introduce some form of band-or low-pass filter between the harmonic generator and the modulator.

The simplest network giving good results was found to be a double-tuned, top-capacitive coupled circuit. This was adjusted to give a reasonably square response of 20 kc/s bandwidth. The circuit may either be tunable to cover the required frequencies, or a number of tuned circuits may be switched to cover the range.

The output from the tuned circuit was amplified approximately 50dB by means of an aperiodic amplifier giving an output voltage of some 50 volts peak.

The Modulator.—Fig. 6 shows the germanium diode lattice modulator fed through two balanced transformers as used in the apparatus. A variation introduced was to feed the harmonic and test frequencies into the two opposite ends of the modulator and obtain the beat frequencies at what is normally the carrier input terminals.

The beat frequency required will be that between the test frequency and the nearest harmonic of the standard. It will therefore be the lowest frequency present in the modulator output. A low-pass filter with a cut-off frequency of 15 c/s was inserted in the output and a 300-0-300 microammeter was used as a beat indicator.

Performance.—To assess the performance of the apparatus, it was used to measure the frequency deviation of a 500 kc/s test frequency. The latter was derived from a 124 kc/s temperature-controlled crystal master oscillator by means of a 124 kc/s to 100 kc/s converter followed by a multiplier. The oscillator was first checked against the 2.5 Mc/s standard frequency transmitted from MSF Rugby, by means of a frequency measuring apparatus[3]. Immediately afterwards, the test oscillator was checked against the apparatus described (Fig. 7). The 1 kc/s standard frequency was supplied from a laboratory standard using a temperature-controlled crystal oscillator.

The accompanying graphs, Fig. 8, show typical readings obtained of frequency deviation from 500 kc/s over a 90 minute test period. It can be seen from the lower graph that the test oscillator maintained a constant deviation of 8.8 parts in 10^8 below 500 kc/s. The upper graph shows the corresponding readings obtained from the pulse apparatus. There is a certain amount of scatter but this does not exceed 3 parts in 10^9 about the mean. It is known that the scatter of the 1 kc/s standard does not exceed 1 part in 10^9 about the mean.

The apparent average discrepancy between the readings obtained by the two methods is actually the deviation of the 1 kc/s laboratory standard above the nominal value.

Errors are involved in the measurements due to inaccurate counting of the beat. This was done visually and timed by means of a stopwatch. It is often difficult to obtain a smooth and defined beat due to noise or small disturbances on the supplies. The author tried to minimise errors due to these factors by means of voltage supply regulation and secondly by counting each beat when the pointer

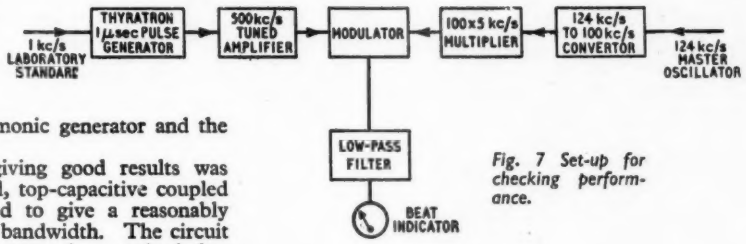

Fig. 7 Set-up for checking performance.

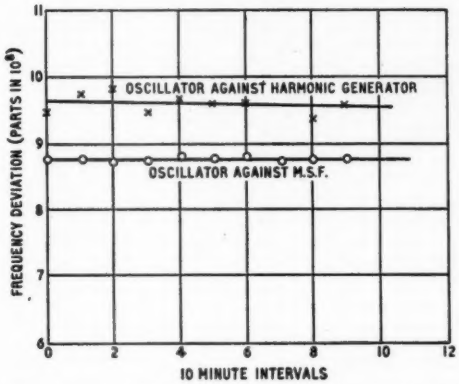

Fig. 8 Curves showing oscillator deviation measured against MSF standard frequency transmissions (2.5 Mc/s) and 1 kc/s pulse harmonic generator.

passed the zero position on the scale in one direction only. Furthermore, the beats counted were of sufficient number and length of time to make small timing errors insignificant. It was estimated that these errors did not amount to more than 0.5 parts in 10^9.

The scatter observed in the readings could possibly be considerably reduced by more efficient triggering of the thyratron. In the present set-up a sinusoidal trigger voltage was used, although an attempt was made to minimize the possible variation in triggering instant by using a trigger voltage of magnitude at least twice the negative bias on the thyratron, thereby ensuring triggering during the steep rise time of the wave. However, a substantial improvement is likely by using a 1 kc/s input that has been squared, differentiated and clipped. This should also tend to reduce any random noise component which might be modulating the output frequency. Another possible improvement is to produce the pulse by means of a blocking oscillator pulse generator.

In conclusion, the author would like to thank Mr. Doherty of the G.E.C. Applied Electronics Laboratory, Coventry, for supplying the thyratron pulse generator.

REFERENCES

[1] "Magnetic Generation of a Group of Harmonics" by Peterson, Manley and Wrathall, *B.S.T.J.* October, 1937.

[2] See for example "Radio and Radar Technique" by A. T. Starr (Pitman).

[3] "Testing Precision Oscillators" by M. P. Johnson, *Wireless World*, April 1955.

U.K. TELEVISION

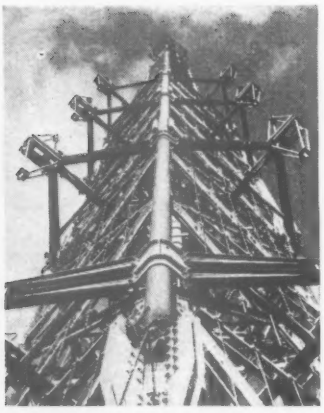

Part of the B.B.C. Crystal Palace aerial which consists of 8 tiers, each of 4 dipoles, the lowest tier being at a height of 350 feet and the highest at 505 feet. The aerial was designed by Marconi's and the tower built by B. I. Callender's.

THE recent publication of the annual reports of both the B.B.C. and I.T.A., and the coming-of-age of television in this country, make it opportune to review the two services.

First, as befits the elder, the B.B.C. With the opening of three more permanent stations (Sandale, Isle of Man and Londonderry) during December and the completion of the permanent aerial at Crystal Palace, the coverage of the B.B.C. television service at the end of the year exceeded 98 per cent of the country's 50 million population.

It is hoped in due course to increase the coverage still further, and to this end additional stations are being planned for the Dover area, the Orkneys and Peterborough. As can be seen from the coverage map on this page, this still leaves large tracts of the country outside the service area, but for geographical reasons the task of adequately covering these sparsely populated areas is extremely difficult. It may well be that the B.B.C. will have to resort to "fly power" automatic relay stations such as are used in Italy.

In addition to the stations already mentioned, the past year has seen the opening of permanent low-power stations at Rosemarkie and Blaen Plwyf and an improvement in the output power of the Norwich transmitter. This, incidentally, will be increased still further in the spring.

The vision signal radiated in Northern Ireland has in the past suffered to some extent because the Divis station has had to rely on the reception of the Kirk o'Shotts transmissions for re-radiation (sound is

B.B.C. STATIONS

	kW	
Channel 1 (45.00 Mc/s vision, 41.50 Mc/s sound)		
Crystal Palace, London	200	V
Divis, N. Ireland	12	H
Channel 2 (51.75 Mc/s vision, 48.25 Mc/s sound)		
Holme Moss, Yorks.	100	V
N. Hessary Tor, S. Devon	1–15	V
Rosemarkie, Inverness.	1	H
Londonderry, N. Ireland	1	H
Channel 3 (56.75 Mc/s vision, 53.25 Mc/s sound)		
Kirk o'Shotts, Lanarks.	100	V
Rowridge, Isle of Wight	1–32	V
Norwich	1–10	H
Blaen-plwyf, Cardigan.	1	H
Channel 4 (61.75 Mc/s vision, 58.25 Mc/s sound)		
Sutton Coldfield, Warwicks.	100	V
Meldrum, Aberdeen.	4–17	H
Sandale, Cumberland	16	H
Les Platons, Channel Islands	1	H
Channel 5 (66.75 Mc/s vision, 63.25 Mc/s sound)		
Wenvoe, Glam.	100	V
Pontop Pike, Durham	12	H
Douglas, Isle of Man	1	V

Effective radiated power (peak white vision) is given. Where a directional aerial is used both max. and min. e.r.p. are shown.
V = Vertical polarization.
H = Horizontal polarization.

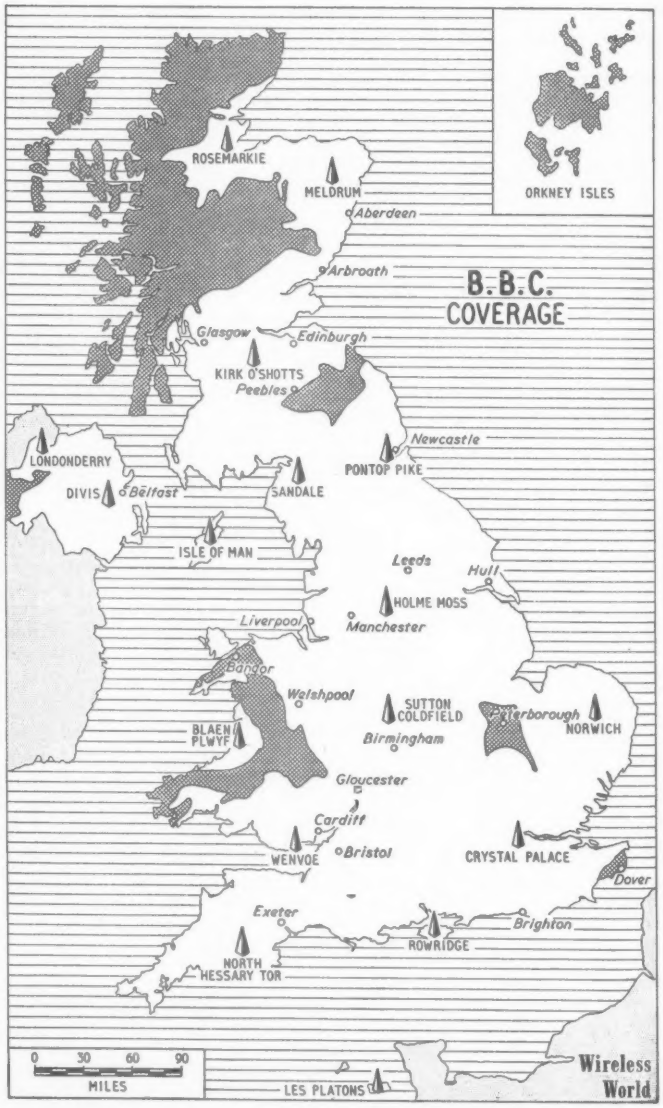

sent by line). To overcome the difficulty the B.B.C. has set up a station in the Isle of Man where signals from Holme Moss are received and relayed by a u.h.f. link to Divis.

The B.B.C. television service is now radiated by 18 stations including the temporary Brighton transmitter not shown on the map.

Now, to turn to the younger, the I.T.A.—not yet three years old. To forestall any criticism it should be pointed out that the I.T.A. coverage map is not strictly accurate as an end-of-the-year survey. It was not until January 14th that the St. Hilary station came into service, but it was originally planned for December 17th, and was in fact operating experimentally from that date. The opening of this station to serve an estimated population of over three million brings the total number of people within the service area of the six transmitters to about 38 million (76% of the population).

Within the service areas of the first five I.T.A. stations there are 4.75M homes with receivers capable of receiving both the B.B.C. and I.T.A.

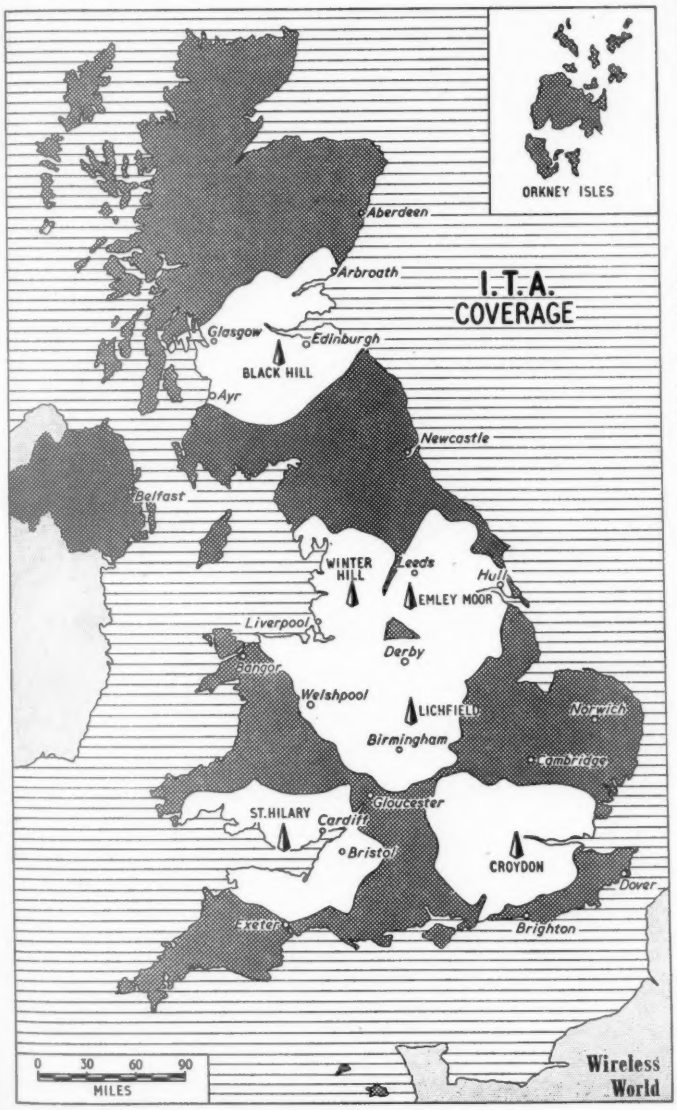

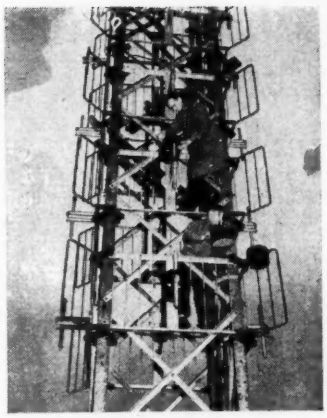

Constructing the Channel 10 aerial installed by Marconi's for the St. Hilary I.T.A. station. It has a gain of 13 giving a vision e.r.p. of 200 kW. The engineers are seen here fitting anti-icing shrouds to the dipole supports.

St. Hilary is the second station to be opened in 1957, the other being Black Hill. Both these stations were to have novel aerials, but unforeseen technical difficulties in the system designed for St. Hilary necessitated further development work, and it was therefore decided by the Authority that in order to get the station on the air as soon as possible a more conventional type should be installed. The Black Hill aerial is unusual in that the elements are located centrally within the 750-ft mast and radiate through the openings in the lattice steel structure, thus reducing wind loading.

The I.T.A. plans for 1958 include the opening of the Chillerton Down, Isle of Wight, station and a North-Eastern transmitter.

References

"Annual Report and Accounts of the B.B.C., 1956-57" (Cmnd. 267). H.M.S.O. 6s.

"Independent Television Authority Annual Report and Accounts, 1956-57." H.M.S.O. 2s 6d.

I.T.A. STATIONS

Channel 8 (189.75 Mc/s vision, 186.25 Mc/s sound)		
	kW	
Lichfield, Staffs.	200	V
Channel 9 (194.75 Mc/s vision, 191.25 Mc/s sound)		
Croydon, London	120	V
Winter Hill, Lancs.	100	V
Channel 10 (199.75 Mc/s vision, 196.25 Mc/s sound)		
Emley Moor, Yorks.	10-200	V
Black Hill, Lanarks.	65-475	V
St. Hilary, Glam.	200	V

Effective radiated power (peak white vision) is given. Where a directional aerial is used both max. and min. e.r.p. are shown.
V = Vertical polarization.
H = Horizontal polarization

Manufacturers' Products

NEW ELECTRONIC EQUIPMENT AND ACCESSORIES

Midget Wire-wound Potentiometer

A NEW miniature, Type MW, wire-wound potentiometer measuring only $\frac{7}{8}$in in diameter and $\frac{11}{16}$in deep has been introduced by the Reliance Manufacturing Co. (Southwark), Ltd., Sutherland Road, Higham Hill, Walthamstow, London, E.17. The new model has a $\frac{1}{4}$in diameter fixing bush threaded 32 t.p.i., and a $\frac{1}{4}$in diameter spindle with a rotation of approximately 285°.



Reliance miniature Type MW wire-wound potentiometer.

Resistance values range from 5Ω to 50kΩ, the latter an exceedingly high value considering the small size of the potentiometer. The resistance tolerance is ±5% for potentiometers over 100Ω and ±10% for those below 100Ω and the rating is 1 watt with the whole element uniformly loaded. A difference of 500 V d.c. is the maximum permissible between spindle and track. The price is 5s 4d for potentiometers of 5Ω to 10kΩ, 6s for 10kΩ to 25kΩ and 7s 6d over 25kΩ and up to 50kΩ.

Miniature Variable Capacitors

THE illustration shows two new miniature variable capacitors recently added to the range made by Jackson Bros. (London), Ltd., Kings Way, Waddon, Surrey. Each is assembled on a single ceramic front plate measuring 1.187×0.937in.

One, the C711/719, is a butterfly type capacitor available in capacitance up to 65pF each section with 0.015in air gaps and up to 15pF each section with 0.045in gaps. The other, the C701/709, is a differential type with capacitance up to 150pF each half with 0.015in air gaps and up to 30pF each half with 0.045in air gaps.

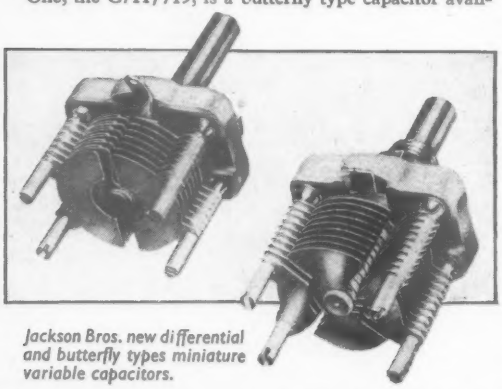

Jackson Bros. new differential and butterfly types miniature variable capacitors.

Both capacitors should find applications in v.h.f. and u.h.f. equipments where small size, low-loss and a low minimum-capacitance form of construction are primary requirements.

Lockable Switches

WITH the expansion of automation and similar forms of machinery control occasions may arise when it would be desirable to lock a master switch so that unauthorized persons cannot tamper with it. This is possible with the new lockable handle which can be fitted, when required, to the range of single and multi-way rotary switches made by Crater Products, Ltd., The Lye, St. Johns, Woking, Surrey.



Crater Products new lockable handle for their range of rotary switches.

As the illustration shows, these switch handles are of quite a new design and embody a Yale-type lock which can be secured and the key withdrawn in any of the several positions of a multi-way switch.

High-precision Frequency Standard

STABILIZATION of oscillators by means of quartz crystals has been the standard practice for many years past, and while frequency stabilities of the order of 1 part in 10^7 satisfies most broadcast and communications transmitter requirements, with on occasion an improvement to 1 part in 10^8, stabilities of any appreciably higher order have hitherto been difficult to achieve.

In the latest Marconi Quartz Servo Freqency Standard Equipment, Type RD101, which was exhibited at the Western Electronic Show and Convention (WESCON) at San Francisco, weekly frequency stabilities to within 2 parts in 10^{10} are achieved and the equipment should find, therefore, applications in fields of activities where extreme accuracy is essential.

Investigations by the Marconi Company have revealed that the principal obstacles to high stability in quartz crystal oscillators are mechanical vibration, valve inter-electrode capacitances and cathode impedance. At the working frequency of 5 Mc/s the two last-mentioned alone precluded attainment of the desirable minimum guaranteed stability of 1 part in 10^7.

These obstacles are claimed to have been surmounted in the Marconi Type RD101 equipment. Its principal features are:—

High-precision 5-Mc/s crystal with low drift rate and immunity from vibration. Dual stabilization of frequency by single crystal. Accurate servo systems with cathode-ray tube monitoring facilities. Uninterrupted operation during checking and maintenance. Output at least 1 volt r.m.s. (sine) into 75Ω at 10 Mc/s, 1 Mc/s and 0.1 Mc/s. Power consumption 500 VA at 200/240 V, 40 to 60 c/s a.c.



Marconi Quartz Servo Frequency Standard, Type RD101.

EMI

"HIS MASTER'S VOICE"

MARCONIPHONE · COLUMBIA

Announce NEW PRACTICAL WAY OF LEARNING AT HOME

NEW — completely up-to-date methods of giving instruction in a wide range of technical subjects specially designed and arranged for self-study at home under the skilled guidance of our teaching staff.

NEW — experimental outfits and lesson manuals are despatched on enrolment and remain the student's property. A tutor is allotted to each student for personal and individual tuition throughout the course.

Radio and television courses, with which specially prepared components are supplied, teach the basic electronic circuits (amplifiers, oscillators, detectors, etc.) and lead, by easy stages, to the complete design and servicing of modern Radio and T/V equipments.

If you are studying for an examination, wanting a new hobby or interest, commencing a career in industry or running your own full-time or part-time business, these practical courses are ideal and may be yours for moderate cost. Send off the coupon to-day for a free Brochure giving full details. There is no obligation whatsoever.

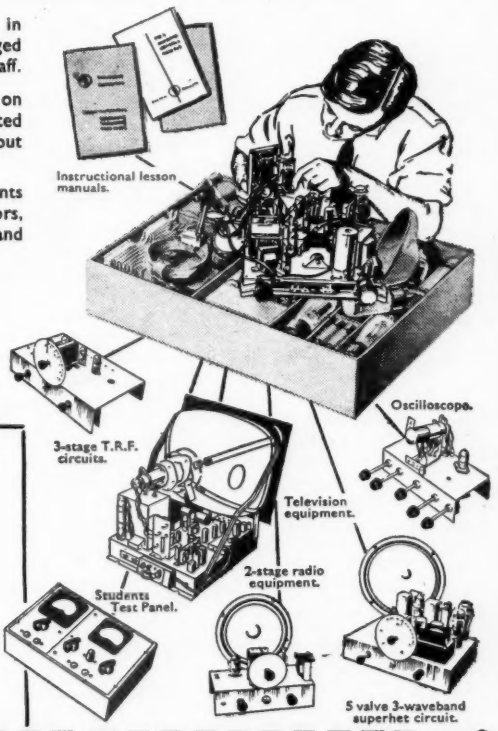

Courses with Equipment

RADIO • SHORT WAVE RADIO
TELEVISION • MECHANICS
CHEMISTRY • PHOTOGRAPHY
ELECTRICITY • CARPENTRY
ELECTRICAL WIRING
DRAUGHTSMANSHIP • ART etc.


E.M.I. Factories at Hayes, England

EMI INSTITUTES

Fill in for FREE BROCHURE
E.M.I. INSTITUTES, Dept. 127x, London, W.4.

FREE

Name.....

Address..... Age..... (If under 21)

BLOCK CAPS PLEASE

I am interested in the following subject(s) with/without equipment

FEB 58 (We shall not worry you with personal visits) IC107

The only Home Study College run by a World-wide industrial organisation

Three things you should know about EDISWAN transistors

MAZDA

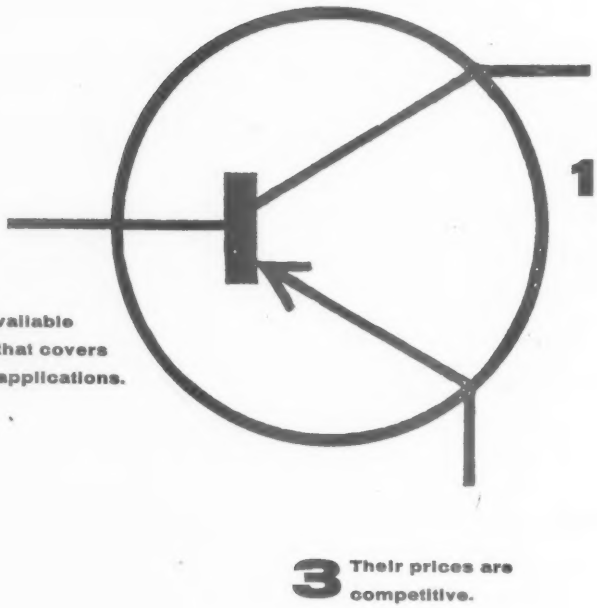

1 More and more manufacturers are specifying them.

2 They are available in a range that covers numerous applications.

3 Their prices are competitive.

Your reference files are incomplete

unless they include our latest folder of Ediswan Mazda PNP Junction Transistor Data.

May we send you a copy?

SIEMENS EDISON SWAN LIMITED

An A.E.I. COMPANY

155 Charing Cross Road, London, W.C.2, and branches

Telephone: GERrard 8660. Telegrams: Sieswan Westcent, London

CRC 15/11

A PRELIMINARY SKIRMISH WITH MODERN THEORIES OF THE STRUCTURE OF MATTER

ATOMS

By "CATHODE RAY"

IN discussing such things as the construction of solids and what goes on when electric currents are flowing through them, I have hitherto uttered a warning that it would be a very simplified explanation, ignoring certain complications of modern science. These are, for example, Fermi-Dirac statistics (which are vital where transistors are concerned), the pessimistic Heisenberg uncertainty principle, the snobbish Pauli exclusion principle, the contradictory Schrödinger wave mechanics, and the notorious Einstein relativity theory, to say nothing of Planck's quantum theory. The risk of running up against these and other alarming subjects has been greatly increased by the advent of transistors. In fact, any but quite elementary or purely practical books on transistors are almost sure to bring them in.

There are two reasons why I have dodged them. One is that most of us find them difficult, because they are highly mathematical and not easily visualized. The other is that they don't help very much when taken separately, so as soon as one starts on them one is in for the lot. On the other hand, the effort is rewarded by knowledge that applies not only to transistors, or even semi-conductors in general, but to most of physical science. For instance, the book I found most helpful in studying electronics was actually written for metallurgists!*

I am not going to pretend to give a proper treatise on them, but it is a good thing to have at least a rough idea of what they are and where they fit into the general scheme. Among other things, they help to explain the conspicuous differences in the electrical resistances of metals, semi-conductors and insulators; rectification at junction and point contacts; thermionic emission; photo-electric effects; and luminescence.

Mass and Energy

There are two main themes running through all: matter (or mass) and energy. So it will be as well to begin by making sure what they mean.

Mass is related to weight, but is not the same. The weight of a thing depends on where it is. As every science-fiction reader knows, a person on the moon would be light enough to jump over a house, but if he moved to Jupiter he would be too heavy to get up out of an easy chair. But the mass of anything is always the same so long as the amount of stuff in it is unchanged. One exception is now known—the relativity effect, by which a body gains mass with speed. This is noticeable only when things move nearly as fast as light; for example, electrons in particle accelerators. The speed has to be about 15,000,000 m.p.h. to make the mass increase by 0.1%.

* "Electrons, Atoms, Metals and Alloys", by W. Hume-Rothery (Iliffe).

The textbook definition of energy is "capacity for doing work." That just passes the buck to the definition of work, which in this scientific sense doesn't correspond at all closely with what we usually understand by that word. It means motion against resistance or pressure or force. Lifting a 10-lb weight 3 feet does 30ft-lbs of work. This work imparts 30ft-lbs of potential energy to the weight, which means that by virtue of its height it is now able to do a total of 30ft-lbs of work in falling down again. By means of a pulley arrangement it could haul up another weight. Or by falling freely it could make a dent in the floor—a short distance of movement against considerable resistance. In this case the work done on the floor would be converted into a small amount of heat, which would be dissipated among the surroundings. At the moment of touching the floor the weight would have lost all its height (and therefore all its potential energy) but it would have gained velocity, which gives it another form of energy—kinetic energy. It is this energy of movement that would be converted an instant later into heat energy. Alternatively, the falling weight could be coupled to a little dynamo to convert the mechanical energy into electrical energy; and this electrical energy could do work by moving a current against a resistance, converting itself into heat energy, or by setting a current moving in an inductance, storing up the energy in a magnetic field.

There are fixed rates of exchange between all these forms of energy. It used to be believed that the total amount of energy in existence was constant, and also that the total amount of mass was constant. The release of heat energy when coal was burnt, and of mechanical energy when a bomb exploded, was attributed to "chemical energy." According to the most accurate weighing possible, the total mass of all the materials concerned was the same before and after combustion.

It is now known that this so-called chemical energy exists in the form of mass, so that when the coal burns or the bomb goes off a small part of the matter composing them is annihilated. Energy is gained at the expense of mass. The ratio of energy gained to mass lost is the square of the speed of light, so the destruction of a very small amount of mass is enough to create quite a lot of energy. One ounce is enough for 700,000,000 kilowatt-hours. In the ordinary way, nearly half a million tons of coal would have to be burnt, and one doesn't easily notice a shortage of one ounce in all the resulting ash and flue gases. It is only in transactions of the kind that go on (or off?) in H bombs that the proportion of mass destroyed is appreciable by ordinary standards. Conversely, a vast deal of energy is needed to create even a grain of matter, so there is really nothing in it for the conjurer.

Energy must be distinguished clearly from power,

which is the rate at which energy is being delivered. You pay the Electricity Board for so much energy, in kilowatt-hours (notwithstanding that they sometimes make the bill out incorrectly, for current); and it is up to you whether you use that energy in a short time to obtain a large amount of power in kilowatts, or for a long time for a low power.

Everything that goes on anywhere in the universe, on any scale from the movements of electrons, through the activities of living creatures, to the outpouring of light and heat from stars, involves redistribution of energy. The curious behaviour of things such as rectifiers and transistors depends on energy on the smallest scale, as possessed by electrons, which are component parts of atoms.

Restaurants Again

The atoms of all substances consist of a positively charged core or nucleus, surrounded by sufficient electrons to neutralize that charge. The amount of positive charge decides what substance the atom is. If it is one unit, the atom is hydrogen and has one electron (i.e., one unit of negative charge) surrounding the nucleus. If it is two units it is helium, with two electrons; if three, lithium; and so on. The highest number found in nature is 92, which is uranium. These numbers from 1 to 92, which decide what element an atom is, are known as the atomic numbers.

All the hundreds of thousands of different substances are constructed of these comparatively few elements, for atoms combine to form molecules, which usually behave quite differently from any of the ingredient elements; for example, water, each molecule of which is made up of two atoms of hydrogen and one of oxygen (Fig. 1). What is called "atomic energy" is really nuclear energy, because it results from changes in the nucleus. That is right outside our subject; the only things about the nucleus that concern us are the number of units of positive charge on it and the fact that nearly all the mass of the atom is concentrated there. The energy we are going to consider is the energy of the surrounding electrons. Although the nature of any substance—whether it is solid, liquid or gas; whether it is poisonous or nutritious; whether it is a conductor or an insulator; etc., etc.—is decided by the number of positive charges in the nucleus of each atom composing its molecule, this influence of the nucleus is exerted indirectly as a result of the number of electrons required to neutralize its charge.

It may seem strange that the nature of a substance depends on how many electrons are normally included in each atom. The strangeness increases when we learn that the actual number of electrons is often greater or less than the normal complement needed to neutralize the nuclear positive charge. For instance, a nitrogen atom has a nuclear charge of +7 units, so normally has seven electrons; but stray nitrogen atoms in a valve are liable to have an electron knocked out by the fast-moving electrons composing the anode current. Such an accident leaves one nuclear charge unneutralized, so the atom as a whole has a charge of +1 and is called a positive ion. But it retains all the usual features of nitrogen, in spite of the fact that it has only 6 electrons, which is the normal complement for carbon (Fig. 2).

The distinctive characteristics of each element and compound could not be accounted for by the normal number of electrons per atom if those electrons were stuck around the nucleus like seeds on a strawberry or buzzed around it at random like a cloud of gnats in a sunny corner of the garden, or even if they revolved around it in neat orbits at any convenient distance, like planets around the sun. It was in trying to explain how some of the most characteristic properties of substances depend on the number of electrons in each of their atoms that (in the July 1956 issue) I likened atoms to restaurants having a curious rule that the first table must be filled before anyone sits at the second, and so on.

The first table in all of them seats only two, and the next eight, so if there are ten guests both of these tables are just filled and in this sociable community there is no tendency either for one guest to go away and leave a vacancy or for another to come in and sit alone at the third table, which also seats eight. This restaurant represents an atom of neon, which is a gas that combines with no other

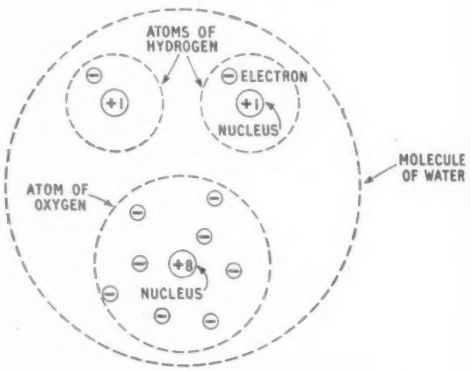

Fig. 1. Diagram showing the composition (but not the arrangement) of a molecule of water.

element at all. But the sodium atom has eleven electrons, so one electron is all by himself at the third table, feeling very much out of it. If there is a fluorine restaurant nearby, which is one with nine guests, leaving one vacancy at the second table, he quickly slips across to it, giving it a surplus of negative charge (−1 unit) and leaving behind an unneutralized positive charge (+1 unit). These charges, being opposite, attract one another so strongly that the two atoms are held together in partnership under the new name of sodium fluoride. This is one example of how compounds are formed.

I didn't think it necessary to mention that these atomic restaurants have another rule—that no more than one guest is allowed in any seat at the same time—because in any well-conducted restaurant that goes without saying. But at first sight there is no more reason why the electrons in an atom should observe a one-at-a-time rule than a rule that the "seats" must be filled in a particular order. Yet this one-at-a-time or no-petting rule is dignified in physics by the name of the Pauli Exclusion Principle. Of course, the electrons don't obey it just because a

chap called Pauli said so; he did no more than call attention to a state of affairs that presumably has existed all the time. It was not until later that someone thought up a plausible explanation for the orderly behaviour of atoms.

Strange Behaviour

But you may justly be complaining that you might be able to take a more intel igent interest in the subject if you knew what the atomic " seats " are and what distinguishes one from another. This is why it was necessary to make sure about energy, because the seats are energy levels. In our earlier example of energy we considered a 10-lb weight 3 feet above the ground, and having therefore 30ft-lbs of potential energy. A similar weight—or the same one—2 feet above ground would of course have 20ft-lbs of potential energy, and so on. Just as weights are attracted to the earth, electrons are attracted to the oppositely charged and relatively heavy nucleus, and the nearer they are the less potential energy they have. A weight can be kept at any desired



Fig. 2. Although the nature of any substance is due to the activities of its electrons rather than its nucleus, it is the normal number of electrons that decides, and that in turn is decided by the charge on the nucleus. Both these atoms have the same number of electrons, but (a) is nitrogen and (b) is carbon. (a) has been positively ionized by removing one electron.

potential energy by putting it on a shelf at the appropriate height above ground, but how can an electron be kept at a constant energy level?

We have had recent examples of how bodies can be kept a few hundred miles above the earth without any visible means of support. They are made to revolve around it at high speed, so that the gravitational pull is exactly neutralized by centrifugal force. So it is not surprising that a popular theory was that the electrons revolve around the nucleus like satellites. But this theory failed to explain why all the electrons revolved at the correct speed to maintain a stable atom, instead of just falling all the way to the nucleus once they came within its attraction. Still less did it explain the fact that such electron orbits (if orbits they were) occurred only at certain fixed distances from the nucleus. This is equivalent to a restaurant rule that guests must occupy seats at certain places, not just anywhere they fancy. According to the ordinary laws of mechanics, the kinetic energy of orbital revolution is only half of what the electrons would attain from loss of potential energy by directly falling, so the total energy of an electron is less when it is in a close orbit than when it is in a distant one; but why should it be restricted to certain fixed total energies?

The theory now in vogue is so contrary to ordinary ideas gained from what we can see around us that it is very difficult to grasp. Until comparatively recently it was assumed that electrons were solid particles of matter, similar to grains of dust but much smaller. This seemed reasonable, because they could be weighed and their individual tracks followed in " cloud chambers " in much the same way as aircraft too high to be seen can be followed by their cloud trails. Their movements through vacuum tubes seemed to conform to the laws of mechanics. Admittedly they were peculiar in having a certain fixed negative electric charge, but that was easily brought into the calculations. One could visualize them quite clearly.

Radiation—light, radio, X-rays, etc.—could also be clearly visualized as something of an entirely different kind: a form of energy, propagated as waves, and of course free from any " graininess."

In many respects these two contrasting concepts worked well in practice. To this day most of the books at elementary and engineering levels are based on them. Where they broke down most conspicuously was in the relationships between them. It was known that electrons could give up some of their energy, which emerged as radiation. And also that radiation could be absorbed by electrons, which were thereby raised to a higher level of energy. In fact, in some cases electrons were parted entirely from their atoms. A good example of this is a photo-electric cell, which is like a diode valve in which a specially prepared metal plate takes the place of the heated cathode. When light falls on the plate, electrons are emitted and can be drawn off by making the anode positive. In broad principle all this seems very reasonable. But the details are not at all as one would expect.

One would expect that the stronger the light the more violently the electrons would be ejected, and if it was very weak indeed there would be none at all. The argument (if any were needed) would be that the more intense the light, the greater would be its energy, so the more energy would be imparted to the electrons, and therefore the greater would be their kinetic energy and consequently their speed. What actually happens, however, is that the brightness of the light has no influence at all on the speed at which the electrons are emitted, but only on the number emitted in a given time. What does affect the energy with which the electrons emerge is the *colour* of the light. We know that colour is an indication of the frequency of the light waves. After allowing for a certain minimum excitation to get an electron out of the atom at all, its emergent energy is found to be proportional to the frequency of the light or other radiation. I mentioned that the cathode in a photo cell is specially prepared; this is because the electrons of most metals are too firmly held to be removed at all by radiation in the visible frequency band (i.e., light)—still less radio frequencies. X-rays have thousands of times the frequency of light, so are most potent in stripping atoms of their electrons, which emerge at high speed.

If sea waves beat against a wall made of heavy stone blocks, nothing noticeable happens to them until the waves reach a certain degree of violence; beyond that, general distintegration sets in. But if

they followed the electronic example the feeblest ripples (provided their wavelengths were short enough) would pull out an occasional block here and there from the moment they started to lap against them!

The doctrine that was evolved to account for these and other apparently absurd results is known as Planck's quantum theory. The heart of it can be expressed with welcome simplicity in the celebrated equation

$$E = hf$$

The meaning of this is that energy does not flow in a continuous stream, but in "packets" (called quanta) each equal to a fixed amount h multiplied by the frequency of the energy. This h appears, like the speed of light, to be a fundamental property of the universe. But unlike the speed of light it is very small, being 6.6×10^{-34} joules per c/s. (A joule is the amount of energy equal to one watt for one second.)

Though this equation is as simple in form as Ohm's law, it has some revolutionary implications. If energy can only be delivered in packets, not "loose," then the idea of radiation streaming forth as continuous waves must be wrong. The higher the frequency (shorter the wavelength) the larger the packets. The greater the intensity of radiation at a given frequency, the more packets per second of the same size.

This apparently fantastic theory does at least fit in with facts that could not be accounted for by "common sense." There is the puzzling behaviour of the photo-cell, for example. And it agrees with what is known about the radiation from the electrons around atoms, which occurs at certain frequencies characteristic of the kind of atom, presumably dictated by the size of the energy jump from one fixed orbit to another closer to the nucleus. These and other agreements do not, of course, prove the theory true. And the theory certainly raises some difficulties.

For one thing, it seems completely self-contradictory. If energy is radiated in isolated packets, like the flow of anode current in a valve, then it cannot be continuous waves, and if it is not continuous waves what is f the frequency of?

In this argument it is taken for granted that an unmodulated anode current, since it consists of separate electrons, cannot be waves. Experiments have shown, however, that sometimes a stream of electrons does behave more like a beam of waves than a stream of particles.

Well, of course, this sort of thing makes it very difficult for ordinary people to pursue a logical line of reasoning at all. We feel like Alice in Wonderland, and may be tempted to give up. But the mathematical geniuses carry on regardless and find a theory that fits the apparently contradictory facts. After all, what reason have we for assuming that the ultimate particles of which all matter is composed behave like visible particles on a small scale, or that waves of light are really like waves that we can see, only smaller? If a giant from Jupiter had such coarse sight that he could see nothing smaller than houses, we would think him very stupid if he assumed that each one was built of tiny houses.

When the facts are examined there seems to be no escape from the conclusion that instead of matter being in particles and radiated energy being in waves, both are alike in being both waves and particles. The reason why the wavelike aspect of matter escapes ordinary observation is that it is negligible except on the electron scale of magnitude. And the reason why we radio people never dream of regarding our signals crossing space as particles is that that aspect is hardly noticeable unless the frequency is much higher even than our microwaves. It is rather like Einstein's relativity, which, although it completely revolutionized ideas about the fundamental quantities—space, mass and time—yet differed from the old ideas by amounts that are negligible for nearly all practical purposes. However, transistor development is only one of many quite practical affairs that necessitate the new ideas about electrons and energy. Reconciling these two apparently incompatible aspects of them is the stickiest patch, which will come up for consideration next month.

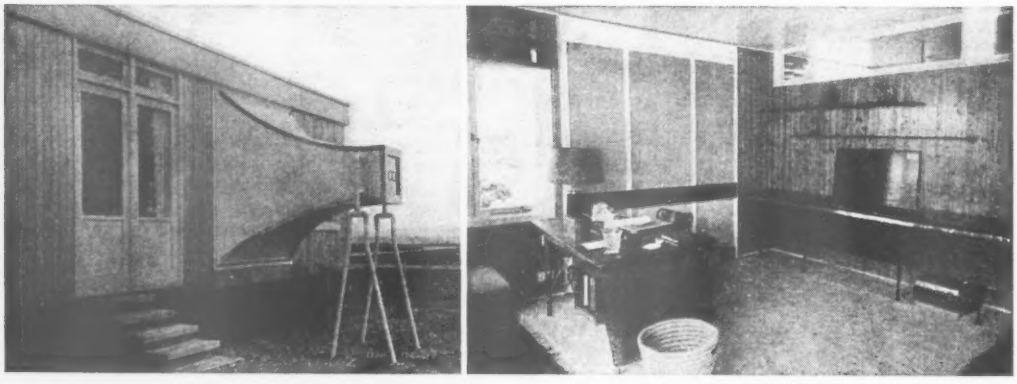

"HI FI" BUNGALOW.—Warren House, Beaulieu, owned by Lord Montagu of Beaulieu, has been designed to incorporate an exponential loudspeaker horn with a flare diameter of 72in and length of 82in. The loudspeaker is made of fibrous plaster and is enclosed by a wooden casing packed with fibreglass. The main drive unit is a Goodmans Audiom 8, supplemented by a Wharfedale Super 8 for middle frequencies and two Super 3 units for the "highs." These are fed through a three-way crossover network from a "Quad" 12-watt amplifier and f.m. tuner, or, alternatively, from a Chapman S5 a.m. tuner. Record reproduction is via Garrard, Goldring and Danish Ortofon turntables and pickups.

Vortexion

TAPE RECORDERS and AMPLIFIERS

The above recorder uses a synchronous capstan motor and for use on 12 volt car battery a 50 c/s ± 1 cycle 230 v., 120 w. power supply unit is available as detailed below.

T.R.G.10 MINIATURE AMPLIFIER AND VERSATILE PRE-AMPLIFIER. A modern miniature amplifier, measuring only 4½ x 5in. over front panel and projecting 10⅓in. to the rear. Uses C core transformer material to obtain low external magnetic field and has less than 0.1% harmonic distortion at 10 watts output. The amplifier response is level 15 c/s. to 50,000 c/s. within 0.2 db. The 3-valve pre-amplifier will operate direct from recorder heads with correction networks for different tape speeds and switched inputs are provided for radio, microphone and gram. with correction for all recording characteristics.

"SUPER FIFTY WATT" AMPLIFIER. This heavy duty amplifier is available for long life under arduous conditions. The normal life being 5,000 hours without valve change.

★ The total hum and noise at 7½ inches per second 50-12,000 c.p.s. unweighted is better than 50 dbs.

★ The meter fitted for reading signal level will also read bias voltage to enable a level response to be obtained under all circumstances. A control is provided for bias adjustment to compensate low mains or ageing valves.

★ A lower bias lifts the treble response and increases distortion. A high bias attenuates the treble and reduces distortion. The normal setting is inscribed for each instrument.

★ The distortion of the recording amplifier under recording conditions is too low to be accurately measured and is negligible.

★ A heavy mu-metal shielded microphone transformer, is built in for 15-30 ohms balanced and screened line, and requires only 7 micro-volts approximately to fully load. This is equivalent to 20ft. from a ribbon microphone and the cable may be extended 440 yds. without appreciable loss.

★ The 0.5 megohm input is fully loaded by 18 millivolts and is suitable for crystal P.U.s, microphone or radio inputs.

★ A power plug is provided for a radio feeder unit, etc. Variable bass and treble controls are fitted for control of the play back signal.

★ The power output is 4 watts heavily damped by negative feedback and an oval internal speaker is built in for monitoring purposes.

★ The play back amplifier may be used as a microphone or gramophone amplifier separately or whilst recording is being made.

★ The unit may be left running on record or play back, even with 1,750ft. reels, with the lid closed.

CP20A AMPLIFIER. This standard amplifier for extreme tropical use will operate from 230 v. A.C. mains or 12 v. car battery and give 15 w. output for a consumption of 5.5a. Inputs for 30Ω balanced microphones, M.I. P.U. and Cr. P.U.

POWER SUPPLY UNIT for operation with Tape Recorder or similar equipment on 12V. car battery.

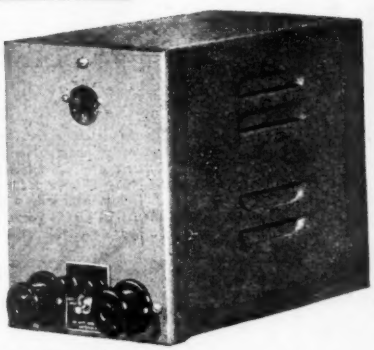

This D.C. to A.C. supply unit has been specially manufactured to provide 1% accurate 50 cycle A.C. power for 50 c/s synchronous motors and amplifiers sensitive to mains noise. The output from the 50 cycle is well filtered to reduce harmonics and give approximately the same degree of quietness as normal 50 cycle mains.

The efficiency is over 80% at wattages over 50. Terminals for a remote control switch are fitted to prevent carrying the heavy low voltage L.T. cables any distance from the battery. The unit can then be fitted at the point closest to the battery to prevent voltage drop on leads and the A.C. satisfactorily extended to any required position.

The unit is fitted in an 18 gauge steel case to give screening, but it should not be placed close to tape heads in case the field causes slight hum.

The case measures 9in. x 6in. x 9in.

Full details and prices of the above on request

VORTEXION LIMITED, 257-263, The Broadway, Wimbledon, London, S.W.19

Telephones: LIBerty 2814 and 6242-3 Telegrams: "Vortexion, Wimble, London."

XUM

Train for a wonderful future in ELECTRONICS...

Every day the demand for the expert in electronics grows. Radio, television, radar and the whole field of industrial automation are rapidly expanding and the trained specialist assures for himself a well-paid career in this quickly developing profession. Here is your opportunity to enter for:—

3 YEAR COURSE TELECOMMUNICATIONS — Entrance standard G.C.E. Ordinary level or equivalent. This course trains students to become Assistant Development Engineers. It covers the City and Guilds' Full Technological Certificate in Telecommunications Engineering. It also includes theoretical and practical instruction on Computers (Digital and Analogue), Process Control and Automation. Next course commences September 9th, 1958.

1 YEAR COURSE Full-time day course in the Principles and Practice of Radio and Television. Designed for the training of Radio and Television Servicing Engineers and others similarly engaged in the Electronics industry. Next course commences May 28th, 1958; others in September and January.

The E.M.I. College of Electronics, Dept. 127, 10 Pembridge Square, London, W.2
Telephone: Bayswater 5131/2

The College is part of the E.M.I. Group . . . Britain's foremost electronic engineers . . . Pioneers of the world's first public Television Service.

THE E.M.I. COLLEGE OF ELECTRONICS

IA63

WESTON PORTABLE INSTRUMENTS

Weston Portable Instruments include D.C. moving coil, A.C. rectifier and H.F. thermocouple types, and instruments of the A.C./D.C. moving iron type; high grade dynamometer models are also available.

Illustrated above is the Model S.82—a permanent magnet, moving coil instrument in the Portable range. This is primarily a Precision Grade instrument but can also be supplied with Industrial Grade accuracy. Details of this Model, together with others in this series, are available on request.

SINGLE PHASE AND POLYPHASE WATTHOUR METERS
SYNCHRONOUS TIME SWITCHES
SYNCHRONOUS MOTORS
AND MOTOR UNITS

SANGAMO WESTON

PANEL & SWITCHBOARD INSTRUMENTS
D.C.Moving Coil, A.C.Rectifier, H.F.Thermocouple A.C./D.C. Moving Iron

PORTABLE INSTRUMENTS
D.C.Moving Coil, A.C Rectifier, H.F.Thermocouple A.C./D.C. Moving Iron, A.C./D.C. Dynamometer

LABORATORY STANDARD INSTRUMENTS
D.C. Moving Coil, A.C./D.C. Dynamometer

CURRENT TRANSFORMERS . FREQUENCY METERS ALL-PURPOSE TEST SETS AIRCRAFT INSTRUMENTS RATIOMETERS TACHOMETERS . WESTON STANDARD CELLS ELECTRICAL THERMOMETERS "PHOTRONIC" PHOTO ELECTRIC CELLS PHOTOMETERS

SANGAMO WESTON LIMITED
ENFIELD · MIDDLESEX
Telephone: ENField 3434 (6 lines) & 1242 (6 lines) *Grams*: Sanwest, Enfield

Scottish Factory: Port Glasgow, Renfrewshire
Port Glasgow 41151

Branches: London, CHAncery 4971
Glasgow, Central 6208; Manchester, Central 7904
Newcastle upon Tyne, Newcastle 26867
Leeds, Leeds 30867; Liverpool, Central 0230
Wolverhampton, Wolverhampton 21912
Nottingham, Nottingham 42403
Bristol, Bristol 21781
Southampton, So'ton 23328
Brighton, Brighton 28497

SW/28

New Frequency-Shift Telegraphy System

IMPROVED RECEPTION UNDER CONDITIONS OF FREQUENCY SELECTIVE FADING

It is the usual practice for long-distance point-to-point radio communication to use the frequency-shift system of telegraphy and extract the signals at the receiving end by a discriminator as used in a conventional f.m. receiver.

In common with all systems of radio communication it is liable to interference from one cause or another, a common one being frequency selective fading due to multi-path propagation. The effect is that fading occurs on either the mark or the space frequencies independently and the customary method of combating this trouble is to use spaced, diversity aerials.

A little thought will show that with the frequency-shift telegraphy system (f.s.t.) the complete message is actually conveyed by the mark and space frequencies independently, since the absence of a mark signal on the mark frequency is a strong indication of a space signal, and *vice versa* on the space frequency. Thus there is the potentiality of frequency diversity in a f.s.t. system with only a single aerial, but it is not realizable by ordinary receiving techniques.

A system of f.s.t. reception which does take advantage of this form of frequency diversity has been developed by the British Post Office and is described in paper No. 2151R published in the March, 1957, Part B, *Proc. I.E.E.*

A completely new receiver is not necessary for this method of reception as it is only the detector part of the set that is affected, and a unit to replace the demodulator and its ancillary circuitry is all that is needed. The early stages of any high-grade communication receiver are suitable for feeding the new demodulator unit and the equipment is intended to be used after the final i.f. amplifiers of existing f.s.t. receivers, such as those installed in the Post Office radio stations. The block schematic diagram shows the new demodulation unit and as spaced diversity aerials are customarily employed at these stations the new demodulator is made to conform with this requirement, although it is applicable to a single-aerial system, in which case about half the equipment would be redundant.

The output mark and space frequencies of 4.5 kc/s and 5 kc/s respectively are obtained by mixing the i.f. outputs of the main receivers with the outputs of two variable-frequency oscillators.

The process of amplifying and rectifying are the same in both mark and space branches, except that the output of the mark branch is positive and that of the space branch is negative, for the "signal on" condition in both cases.

The "assessor" units interpret the mark and space rectified outputs with reference to pre-set signal levels so that the presence, or absence, of a signal is independently and continuously weighed in each branch. As the combined output varies in

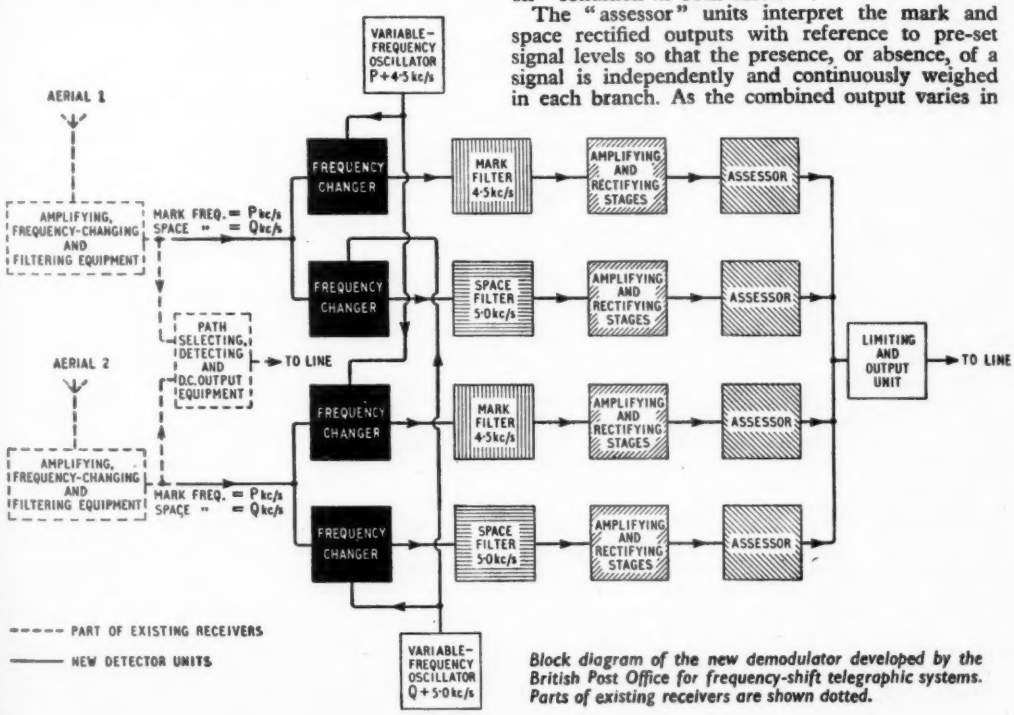

Block diagram of the new demodulator developed by the British Post Office for frequency-shift telegraphic systems. Parts of existing receivers are shown dotted.

magnitude, as well as in polarity, it is further amplified and limited before passing to the land line. The circuits concerned with this operation deliver a final output of ±30 volts d.c.

The frequency stability requirements of the new method of reception are considerably more stringent that those required by international regulations for long-distance telegraphic services. On the h.f. bands, for example, these regulations permit a frequency tolerance of 30 parts in 10^6, but with the new system of reception, and with transmitters and receivers working on 15 metres, the permissible tolerance is only 25 c/s, or 1 part in 10^6. This assumes telegraphic speeds of about 100 bauds. However, such close mutual agreement is readily attainable with modern communications equipment.

Transistor Amplified A.G.C.

Economical Circuit for Use in Small Portables

BY W. WOODS-HILL

THE miniaturization of portable receivers brings in its wake some problems which are not generally encountered in full-size models. One of the more subtle of these is the very large and sudden changes in signal level encountered when a "vest pocket size" set is carried about in the hand or pocket.

The problem is rendered more difficult if transistors of low cut-off frequency are used as these do not lend themselves very well to simple a.g.c. control such as can be obtained from the d.c. voltage available at the diode detector. This lack of control springs from the fact that the source impedance of the a.g.c. voltage (diode detector) is the same or even higher than the impedance of the transistor control element, so that only half or less of the d.c. swing is available for control.

If space were not so restricted, and if cost allowed, an elaborate d.c. amplifier terminated by a suitable low impedance circuit (grounded collector) could be evolved. But even d.c. amplifiers have their drawbacks in this case, because as well as amplifying the changing voltage, they also move its level towards that of the negative h.t. line, whereas the control voltage for the i.f. stage is required at a small negative (−0.16V) bias voltage close to the earth line. To achieve this bias a voltage dividing network must be inserted between the collector of the d.c. amplifier and earth, which besides "dividing down" the voltage to the required level, unfortunately also divides down the controlling voltage swing available. This therefore tends to defeat the main objective, which is to obtain a large voltage swing for a small change of signal amplitude.

If the bulk of a separate battery could be tolerated, then the undivided voltage available at the collector could be directly connected to the base of the i.f. transistors. However, this circuit would probably rapidly go out of adjustment due to irregular fall of both battery voltages with age.

A Practical Circuit. The ideal amplified a.g.c. system would work without any extra supply batteries, be independent of normal battery voltage fluctuations with age, and use no more components or transistors than a more usual system.

The diagram shows a circuit which approaches this ideal. It has been successfully used by the author and gives a good a.g.c. action.

The transistor T2 combines the function of second detector, audio amplifier and a.g.c. voltage amplifier.

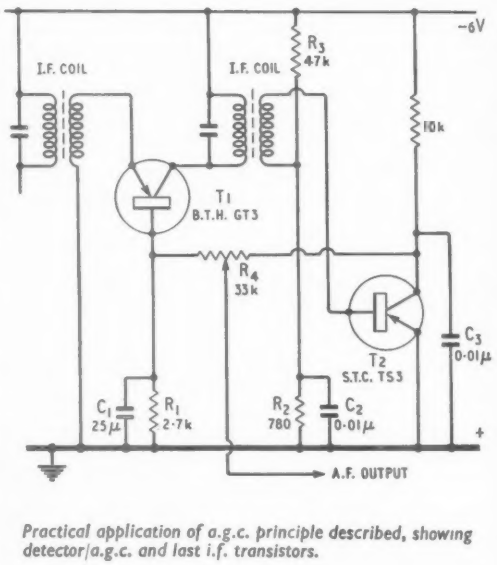

Practical application of a.g.c. principle described, showing detector/a.g.c. and last i.f. transistors.

The ability of this transistor to perform all these functions hinges on the fact that junction transistors exhibit a "pentode like" characteristic whereby the current is independent of collector volts over a wide range of voltages, right down to about −0.3V. This means both that the mean operating potential of the collector can be brought down close to the earth line (say to −3.5V), so that little voltage dividing is necessary to bring it down to the −0.16V required as bias for the i.f. stage, and also that a high collector load can be used, thus giving correspondingly high d.c. amplification. Despite this low collector voltage it still operates reasonably linearly, and does not add any appreciable extra distortion to the audio signal. Moreover, its detection efficiency is little impaired by these operating conditions.

If a volume control for the audio signal appearing at the collector of T2 is needed, then it is quite in order to use the resistance of the fixed portion of the potentiometer as one leg of the a.g.c. voltage divider

connecting the collector of T2 to the base of the last i.f. transistor T1, as in the diagram, provided that the bottom of this potentiometer is decoupled to earth at audio frequencies by the condenser C1.

Circuit Operation. Under low-signal conditions the potential at the collector of T2 is 3.5V and that at the base of T1 0.16V. As the r.f. signal applied to the base of T2 increases in amplitude the average current in T2 will increase, because, during the negative r.f. half cycle signal swings, the forward bias set by R_3 and R_4 is increased so that the d.c. level at the collector falls towards earth. The extent of this fall naturally depends on the increase of signal at the base of T2, but with a dummy load on T2 instead of the i.f. stages (no a.g.c. in action), has been noted to fall as far as from 3.5V to 0.6V. This would normally have represented a fall in bias from 0.16V to about 0.03V had the circuit been connected to the i.f. transistor bases. However, with a.g.c. in action this is most unlikely to occur because the i.f. sensitivity falls very rapidly below 0.09V bias, so that a signal which was potentially capable of producing such a fall would have been sufficiently reduced by the i.f. stages becoming desensitized. The aim is to maintain good audio quality even under strong signal conditions by ensuring that the voltage at the collector of T2 does not fall below the knee of the collector-current/collector-voltage curve at 0.3V.

Condenser C_3 is, of course, a filter for r.f. decoupling.

Circuit Design. It is difficult to be specific about what values to use in a circuit of this type, because the characteristics of junction transistors vary greatly between different types and also to some extent between individual samples of the same type. However, if the principles are understood it should be reasonably easy to evolve a suitable circuit for whatever type of transistor is proposed, and then make one of the components, e.g. R_3, variable to take up any differences between samples of the same type.

The first criterion is that the voltage at the collector of T2 must not be allowed to fall below the knee given in the manufacturers' collector-voltage/collector-current curves. To achieve this, arrange the forward bias on the base of T2 to be between $\frac{1}{4}$ and $\frac{1}{2}$ of what the manufacturers recommend for class A operation. A fixed bias is required because the collector-current/emitter-current curve is not linear close to cut-off. Choose a collector load which under these conditions gives a collector voltage which is about ten times the knee of the bend. Make the value of resistance R_1 connecting the base of the T1 to its emitter as large as possible, yet not so large that any appreciable gain is obtained with no negative bias connected. A resistance R_4 should be connected between T2 collector and T1 base of such a value that the i.f. transistors receive the recommended bias.

Should the value of this resistance cause the voltage on the collector of T2 to fall below 3.5V under no-signal conditions, then the collector load should be reduced and R_3 increased, until the collector potential reaches 3.5V and the i.f. transistors are receiving their correct bias.

Effect of Battery Supply Variations. Assuming the battery supply voltage falls with use then, because the bleeders R_3 and R_2 are specifying the bias applied to the base of T2, this bias will also fall, causing a reduction of the current through T2. This causes the voltage at the collector (which is also the source of the a.g.c. voltage to the i.f. transistors) to increase. On the other hand, by stipulation, the supply volts to the collector of T2 have fallen, so that this increase will not be as marked as might at first be thought.

The overall effect of decreasing battery voltage on the entire set is a general falling off in liveliness, but this is partly compensated by increasing i.f. stage sensitivity due to the increasing bias discussed above. In fact, R_3 can be so adjusted that the set will become more lively with use (as the battery voltage falls) though, as might be expected, the quality begins to suffer due to improper operation of the audio stages.

SHORT-WAVE CONDITIONS *Prediction for February*

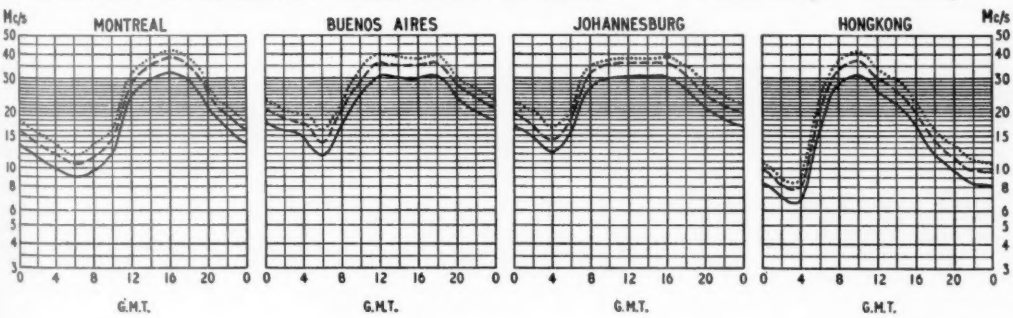

THE full curves given here indicate the highest frequencies likely to be usable at any time of the day or night for reliable communications over four long-distance paths from this country during February.

Broken-line curves give the highest frequencies that will sustain a partial service throughout the same period.

•••••••••• FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE FOR 25% OF THE TOTAL TIME

— — — PREDICTED AVERAGE MAXIMUM USABLE FREQUENCY

——— FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE ON ALL UNDISTURBED DAYS

News from the Industry

G.B.C. Electronic Industries, Ltd., has been formed by H. V. Bolsom and L. M. Bolsom who have resigned their directorships of the Champion Electric group of companies which was recently taken over by Thorn Electrical Industries. The new company, which has offices at 119, Edgware Road, London, W.2 (Tel.: Ambassador 2872), has been formed to import and distribute tape recorders and electronic equipment. The first two tape recorders to be handled are the miniature battery-operated transistorized Phonotrix made in Germany and the Italian mains-operated Phonetic.

Bonochord has been merged with W.S. Electronics, both firms being members of the K.G. (Holdings) group of companies. The trade name Bonochord will continue to be used for hearing aids and auditory equipment. Bonochord's offices and showroom at 48, Welbeck Street, London, W.1, will continue, but production is now centred at the W.S. Electronics works at 44, Brunel Road, London, W.3. Colonel A. E. Tyler is general manager of W.S. Electronics, Ltd., B. J. Brown is works manager, and R. A. Cail technical manager.

Multimusic, Ltd., has been formed as a wholly owned subsidiary of Multicore Solders, Ltd., with a view to marketing products in the field of magnetic tape recording and reproduction. The company's formation reflects the interest of Multicore's chairman and managing director, Richard Arbib, in sound reproduction.

Gramophone records of flexible, transparent, cellulose acetate, only 0.003-inch thick, for use as advertising "gimmicks," are now available in this country. Rainbow records, as they are called can be attached to the walls of a cereal carton, for instance. Playing time at 78 r.p.m. averages from 70 secs on a five-inch disc to 140 secs on a seven-inch record. L.P. records can also be made. The equipment, installed by Everest Plastics, Ltd., of 45-46, Morley House, 320, Regent Street, London, W.1, for the cartons division of E. S. & A. Robinson, Ltd., at Fishponds, Bristol, can produce 40,000 impressions per day.

H. W. Forrest, Ltd.—The note in last month's "News from the Industry" on this company's introduction of transformers for a.f. transistors inadvertently came under the heading "New Addresses." The company, established in 1922, has been at its present address, 349, Haslucks Green Road, Shirley, Solihull, Warwickshire, for many years.

E-V, Ltd., formerly Sapphire Bearings, Ltd., the sapphire stylus and ceramic cartridge manufacturers, has a reconstituted board of directors. John Dalgleish, chairman and managing director of Camp Bird, Ltd., the parent company, is chairman, P. J. N. Collaro, who recently resigned from Collaro, Ltd., is managing director, and Dr. F. E. Templeman is technical director. A. P. Riding is also on the board. D. Robinson, previously managing director of E-V, is now managing director of Ambassador. A new company, Electronic Reproducers, Ltd., which will be primarily concerned with the manufacture of crystal cartridges, has been formed by the group. It will operate under the chairmanship of P. J. N. Collaro, with Dr. F. E. Templeman as technical director.

Mullard's 4MeV linear accelerator is being installed by Philips Electrical at the research station of British Petroleum, Ltd., at Sunbury-on-Thames, Middlesex. In this connection it has many applications, including the production of electron beams for initiating polymerization and the production of new materials by molecular re-arrangement or graft techniques.

Millionth television receiver off the Ekco production line at Southend-on-Sea (a 17-inch table model with v.h.f. sound) was presented to a local children's home. E. K. Cole started manufacturing television receivers in 1936, but since production reopened in 1946 over 980,000 receivers have been made.

Automatic Telephone & Electric Co., who have supplied considerable quantities of telegraph equipment to the U.S. airforce in this country, has received further orders valued at £76,000 for telegraph distortion measuring sets and electronic regenerative repeaters. TDMS equipment was shown by A. T. & E. at the Washington exhibition of the Armed Forces Communications & Electronics Association last year.

Thirty television cameras and associated equipment have been ordered by the B.B.C. for the new television centre at White City, where the first three studios are planned to be brought into service in 1961. The cameras will use 4½-in tubes of the image-orthicon type and the order is shared equally between E.M.I. and Marconi's.

Aerialite, Ltd., have produced their 40 millionth aerial. To mark the occasion a voucher of £100 has been packed with the aerial, and ten other aerials carry a £10 voucher.

Printed Circuits, Ltd., of Stirling Corner, Barnet By-Pass, Borehamwood, Herts, recently announced that they are prepared to undertake the quantity production of almost any form of printed circuit at a fixed cost of 1d per square inch. This figure includes raw materials and processing but excludes the cost of special tools.

OVERSEAS TRADE

Multi-channel radio telecommunications equipment to link the towns of Luanda, Malange and Marechal Carmona in Angola (Portuguese West Africa) is to be supplied by Marconi's and A. T. & E. The order was obtained from the Angolan postal and telegraph authorities through the companies' associates, Automática Eléctrica Portuguesa (S.A.R.L.). The total distance covered will be about 400 miles. Marconi's will supply the terminal transmitters and 16 repeaters and A. T. & E. the carrier telephone equipment.

Radio telephone equipment valued at over $100,000 has been ordered from Pye by the Veterans' Taxi Cab Company of Montreal.

Masts for the most northerly coast radio station in the world—at Isfjord, West Spitzbergen, were supplied by B. I. Callender's Construction Co. Four 120-ft. masts support the station's aerial.

Brussels International Exhibition.—A display of consumer goods is being arranged by the Council of Industrial Design for the British industries pavilion at the Brussels Exhibition (April 17th to October 19th). Among the sound and television receiver manufacturers who have agreed to participate in the display are Bush, Cossor, Ekco, E.A.R., Philco, Portogram and Trix.

Belgium.—One of the twenty sections of the Liége International Fair, which is being held from May 10th to 26th, will cover electrical and electronic equipment. British manufacturers are being offered specially reduced rates for space. Further information is available from the U.K. representative of the Fair, R. C. Liebman, 178, Fleet Street, London, E.C.4.

France.—Lille International Trade Fair (April 19th to May 4th) will include a section for domestic sound and television receivers. Particulars are obtainable from the Commissariat General, Grand Palais, Foire de Lille, Lille (Nord).

FEBRUARY MEETINGS

LONDON

5th. Brit.I.R.E.—"Radio investigations during the I.G.Y." by Dr. W. J. G. Beynon at 6.30 at the London School of Hygiene and Tropical Medicine, Keppel Street, W.C.1.

6th. I.E.E.—49th Kelvin Lecture on "High polymers" by Dr. H. W. Melville at 5.30 at Savoy Place, W.C.2.

7th. Television Society.—"The effects of noise in television transmission" by T. Kilvington (Post Office Eng. Dept.) at 7.0 at the Cinematograph Exhibitors' Association, 164 Shaftesbury Avenue, W.C.2.

12th. Radar Association.—"The early days of radar" by Sir Robert Watson-Watt at 7.30 at the Anatomy Theatre, University College, Gower Street, W.C.1.

14th. R.S.G.B.—"The television interference problem" by G. A. Bird (G.P.O.) at 6.30 at the I.E.E., Savoy Place, W.C.2.

18th. I.E.E.—"Magnetic tape for data recording" by Dr. C. D. Mee at 5.30 at Savoy Place, W.C.2.

19th. I.E.E.—"The relation between picture size, viewing distance and picture quality with special reference to colour television and to spot-wobble techniques" by L. C. Jesty at 5.30 at Savoy Place, W.C.2.

20th. Television Society.—"Test equipment for colour television receivers" by F. H. Cohen and D. C. Kidd (Murphy) at 7.0 at the Cinematograph Exhibitors' Association, 164 Shaftesbury Avenue, W.C.2.

21st. B.S.R.A.—"Reducing distortion in f.m. reception" by Dr. G. J. Phillips at 7.15 at the Royal Society of Arts, John Adam Street, Adelphi, W.C.2.

24th. I.E.E.—"Stereophonic recording on gramophone discs" by H. A. M. Clark at 5.30 at Savoy Place, W.C.2.

26th. Brit.I.R.E.—"Dectra: a long-range navigational aid" by C. Powell at 6.30 at London School of Hygiene and Tropical Medicine, Keppel Street, W.C.1.

26th. Women's Engineering Society.—"Three case studies in automation" by G. Denton at 6.45 at Central Electricity Authority Headquarters, Winsley Street, W.1.

ARBORFIELD

11th. I.E.E. Graduate and Student Section.—"The tracking of the Russian earth satellite" by D. L. Cooper-Jones at 7.0 in the Assembly Hall, 3 (Tels.) Training Bn., R.E.M.E.

BIRKENHEAD

19th. Brit.I.R.E.—"Closed-circuit television" by J. G. M. Downes at 7.0 at the Technical College.

BIRMINGHAM

3rd. I.E.E.—Discussion on "The place of liberal studies in a technical institution" opened by E. H. Horrocks at 6.0 at the James Watt Memorial Institute, Great Charles Street.

BRISTOL

11th. Television Society.—"I.G.Y." by A. F. Collins at 7.30 at the Hawthorns Hotel, Woodland Road.

CAMBRIDGE

4th. I.E.E.—"Problems of sound and television broadcasting coverage" by G. Millington at 8.0 at the Cavendish Laboratory, Free School Lane.

25th. I.E.E.—"The eye as a television camera" by Dr. F. W. Campbell at 8.0 at the Physiological Laboratory.

CHELMSFORD

4th. I.E.E. Graduate and Student Section.—"Transistor amplifier circuits" by W. A. Thorpe at 7.0 at the Public Library.

CHELTENHAM

28th. Brit.I.R.E. — "Information theory" by P. H. Blundell at 7.0 in the North Gloucestershire Technical College.

EDINBURGH

21st. Brit.I.R.E.—"Frequency response instrumentation for the analysis, design and construction of servo-mechanisms" by G. R. Swainston at 7.0 at the Department of Natural Philosophy, the University.

GLASGOW

20th. Brit.I.R.E.—"Frequency response instrumentation for the analysis, design and construction of servo-mechanisms" by G. R. Swainston at 7.0 at the Institution of Engineers and Shipbuilders, 39 Elmbank Crescent.

MANCHESTER

6th. Brit.I.R.E.—"Electronic musical instruments" by Alan Douglas at 6.30 at the Reynolds Hall, College of Technology, Sackville Street.

11th. I.E.E.—"Electric control of stage and television lighting" by F. P. Bentham at 6.15 at the Engineers' Club, 17 Albert Square.

NEWCASTLE

12th. Brit.I.R.E.—Students' night at 6.0 at the Institution of Mining and Mechanical Engineers, Neville Hall, Westgate Road.

RUGBY

25th. I.E.E.—"The importance of research in hearing and seeing to the future of telecommunication engineering" by Dr. E. C. Cherry at 6.30 at the Technical College.

TREFOREST

26th. Brit.I.R.E.—"Industrial television" by R. Swinden and J. E. H. Brace at 6.30 at Glamorgan Technical College.

WOLVERHAMPTON

12th. Brit.I.R.E.—"Industrial applications of radio isotopes" by R. F. Armitage at 7.15 at the Wolverhampton and Staffordshire Technical College, Wulfruna Street.

LATE-JANUARY MEETING

31st. Brit.I.R.E.—"Digital computers" by R. Deighton at 7.0 in Priory Lodge Hall, Malvern (not the Winter Gardens, Malvern, as stated in the last issue).

sound equipment serves the world

Among recent important installations, we have equipped the newly built Sports Stadium at Funchal, Madeira, with a complete Announcement, Music and Radio system, utilizing Column Loudspeakers for even, all-round sound diffusion.

Here is yet another example of the wide-ranging reputation enjoyed by TRIX Sound Equipment.

a product of
THE TRIX ELECTRICAL CO. LTD.
1-5 MAPLE PLACE, TOTTENHAM COURT RD
LONDON, W.1
Tel.: MUS 5817 Grams: Trixadio Wesdo London

RANDOM RADIATIONS

By "DIALLIST"

Whistling TV Sets

THE letter from D. A. Thoms in the January issue of *Wireless World* on the subject of whistle from the line output transformer interested me greatly. Though I can no longer hear this whistle unless I'm close to the receiver and make an effort to do so, I know quite a few people who find it so distressing that they cannot bear to watch television. Some manufacturers make greater efforts than others to minimize it by carefully padding the transformers; but it is a shortcoming in the TV receiver which urgently needs attention. American manufacturers and those in other countries have not the same problem as ours. In the American 525-line, 30-frame system the whistle has a frequency of 15.75 kc/s, in countries using the 625-line, 25-frame system it is 15.625 kc/s. Both of these frequencies should normally be all but inaudible to other than very young ears. As for the French 819-line, 25-frame system, its whistle with a frequency above 20 kc/s is nothing for anyone to worry about. I don't quite see how the whistle in our receivers is going to be cured so long as we continue to use a shock-excited winding in the transformer to produce the e.h.t. voltage. But there are other ways of doing this and I'm sure that the first manufacturer who brings out a whistle-free TV set and makes a strong point of this quality will find large sales for his wares.

Interference Suppression

REGULATIONS on the radiation of interference so far issued by the P.M.G. cover motor ignition systems, small electric motors and refrigerators and a committee is now investigating interference from scientific, industrial and medical equipment. But there are many other sources of interference which can cause serious annoyance to neighbours using their sound and TV receivers and, so far as I can find out, there's nothing except consideration for others and common decency to prevent anyone from using such unsuppressed equipment. Fluorescent lamps, for instance. A small percentage of these can, and do, cause horrible interference. How effective proper suppression can be one knows from visits to the Radio Show in the last few years—hundreds of these lamps, but not a trace of interference from any of them on the TV screens on the stands. Then there are various kinds of apparatus using thermostats. Most, if not all, of those sold in, say, the last three years are suppressed; but the older ones very often aren't. Electric razors come into the "motor" category. Few are in use during viewing hours, save, perhaps, by the more hirsute who need a trim up before going out for the evening or on night duty. Here again all the newer ones have adequate suppression, though the older ones haven't. Motor-operated toys aren't always properly suppressed and since they may be used at odd moments at any time of the day up to say 9 or 10 o'clock, the P.O. engineers may find it very difficult to track down offenders. One friend of mine was almost driven off his head by violent interference, always most frequent on wet days, which never occurred after 8 o'clock in the evening. The P.O. engineers were very good about it, paying visit after fruitless visit. Then they came on a wet day and found it in full swing. It didn't then take them long to discover that the source was a small boy's electric railway, which had been sent him from abroad as a present.

Best TV Screen Height

BEFORE now I've mentioned that if you want comfortable television viewing, as no doubt you do, it's most important that the screen should be at just the right height. In many consoles the screen is too low and you can't do much about it. The table model you can put on to a table of about the right height, raising the set if need be by methods which can safely be left to the ingenuity of *W.W.* readers. And there's an even better way that that. At least one firm* is now marketing a most ingenious trolley, which enables the screen to be adjusted to any height up to five feet from the floor. While the trolley is being wheeled about the set remains on the ground floor, so to speak. But when it's in position you can raise the set to any height you like without any kind of heaving. The set lives in a delicately balanced cradle and when you feel that the height is just what it should be, you stop raising and this locks automatically. To put the set to bed, you simply press a small lever and down it goes as lightly as a feather. A very tall console would be rather unsightly on such a trolley; but I can't see any reason why something similar shouldn't be worked out for sets housed in console cabinets of the more usual size.

* Rediffusion Vision Service Ltd., of Chessington, Surrey.

South Africa Looks In

WRITING from Germiston, South Africa, a reader who is an enthusiastic DX-er tells me that he receives pictures from the Crystal Palace almost every evening between five o'clock and seven o'clock, local time. South African standard time is two hours ahead of ours, so he must be getting the afternoon programmes. His set, made by himself, is the *Wireless World* superhet, of which constructional details were published in 1949. He has made certain modifications to the r.f. section and his local oscillator is crystal-controlled. He has three headaches; the pictures are rather "snowy," though that's surely to be expected; the line timebase is difficult to keep in sync and there's interference at times from the second harmonic of Rome's 21-Mc/s sound service for South Africa. Still, I'm sure it's a wonderful show and one which both he and the designer of the set may well be proud. I was sorry not to be able to comply with his request for circuit details of the Synchroguide system, which I mentioned in these notes a while ago. It's a proprietory device and so far as I know it is supplied only to TV set manufacturers. I hope this South African reader will let me know how he gets on now the Crystal Palace e.r.p. has gone up to 200 kW.

The Wrotham Question

THERE seemed to be so much doubt about the upper limit of Wrotham's audio frequency band that I applied to the B.B.C.'s engineering information department for help in clearing things up. In their

reply they state that both the transmitters at Wrotham and the lines between London and Wrotham are capable of dealing faithfully with frequencies up to 15 kc/s. Though implied, it is not definitely stated that the full 15-kc/s band is always used; but from experience of these transmissions I feel pretty sure that, as a rule at any rate, it is. There may be times when the connecting lines are not right up to the mark; but the P.O. engineers who are responsible for their maintenance are so strict about their standards that I fancy that these are few and far between.

Setback for French TV

AS one of its economy measures, the French Government recently decided that it could not provide the money needed for the expansion of the 819-line network. This must mean that quite considerable areas of the country will remain without a television service for some time to come. In his editorial in the December number of *Télévision* E. Aisberg argues strongly that this is false economy. He gives figures which go to prove the assertion of Gabriel Delaunay, director general of R.T.F., that so far as the French government is concerned television is a paying business. The transmitter at Lille is taken by Aisberg as an example to drive the point home. Reckoning the franc in round figures at 1,000 to the pound sterling, the cost of the station was £200,000. Since it was opened some four years ago 180,000 TV sets have been sold in its service area and by various taxes the State has profited to the tune of £6,000,000 from their sale. It has in addition received not far short of £200,000 in the form of licence fees.

Making it More Difficult

THOUGH I'm all in favour of using small letters in such abbreviations as v.h.f., e.h.t., and so on, I'm dead against the custom adopted by some American publications of leaving out the full-stops. In these, for example, i.f. is written if, which naturally jumps to the eye as the conjunction and in reading an article in which intermediate frequencies are referred to you (or at any rate I) have to be constantly on the alert to distinguish the ifs which are conjunctions from those which are abbreviations. To my mind the authors and publishers of technical books and articles should do all they can to make things easier and not more difficult for the reader.

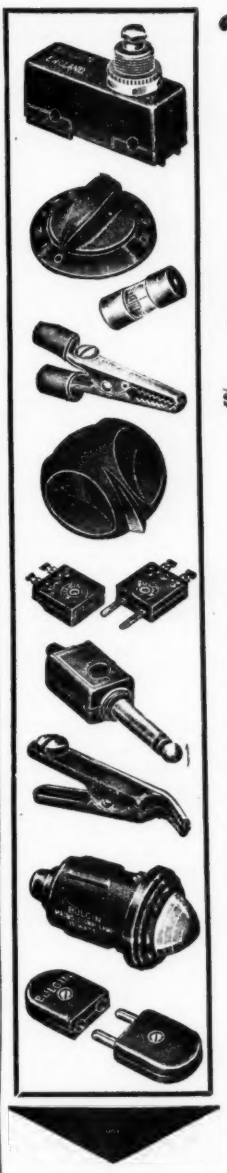

"HELP!" . . .

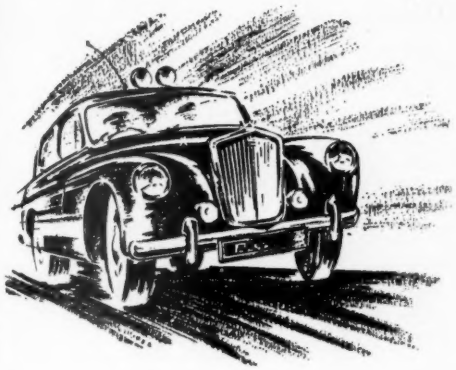

. . . and instant response !

Alarm-calls for aid, to save life, to prevent and detect crime! Today, communicating networks must be more efficient, contact even quicker and more unfailing. Bulgin Components make more modern, more efficient, Radio Communication Equipment possible, achieving new feats and new ambitions.

The Bulgin research and manufacturing Division, with its unique skill and experience is solving many problems of today and tomorrow.

OVER 10,000 COMPONENTS AVAILABLE

★ *Full details will be found in fully illustrated Catalogue No. 198/W.W. (Free to trade letterhead or order.)*

THE HOUSE OF BULGIN *components*

A. F. BULGIN & COMPANY LTD.
BARKING · ESSEX Tel.: RIPpleway 5588 (8 lines)

MANUFACTURERS OF RADIO AND ELECTRONIC COMPONENTS

UNBIASED

By FREE GRID

Chirographic Chores

WHEN I wish to write a letter to my blonde or prepare these few notes for you, one of the most difficult and wearisome tasks is, I find, the pushing of the pen or the hammering of the typewriter keys, at neither of which I am expert.*

The word calligraphy is definitely a misnomer for my handwriting and I prefer to use the more correct term chirography, although unkind people have suggested that podography would be more accurate.

To escape the chirographic chore of the pen or the tyranny of the typewriter, I have tried using a tape recorder, but it is not too satisfactory. I find I like to be able to *read* what I have "written" and not merely to *listen* to it. The day is still far distant when the human voice will be able to operate a typewriter direct, but I think I am definitely on the track of an idea which will eradicate wearisome pen pushing or typewriter tapping. Like all great ideas and inventions it is very simple.

We all know that a musician can read a musical score with the same

Free Grid reading a "score"
(Reproduced from "W.W." February 3rd, 1933)

ease with which you and I read *Wireless World*. It is perhaps less well known that anybody willing to try the experiment can learn to read English written in the Greek or Cyrillic alphabet with the same ease and speed as he can read it in the normal Roman alphabet.

A quarter of a century ago I told you how I had learned to "read" the wiggles of a gramophone recording, and I reproduce a sketch of myself doing it which was published at the time. It is true I was following the score of a musical recording, but it would be just as easy to read speech.

My proposal is, therefore, that we should drop two of the three "Rs" in our school curriculum and teach children to read the "script" of a gramophone record and to "write" by using a microphone. We should, of course, need our recordings on tape rather than disc.

It would not be possible to read magnetic tape direct without applying messy magnetic powder but what could be easier than to pass it through a simple electronic transcribing machine? The recording would be amplified in the usual way and then passed, not to a loudspeaker, but to a cathode-ray tube and made to appear as wavy lines.

I am convinced that one day my idea will be turned into glorious reality, and the myriads of typists in our offices will be retained solely for ornamental purposes, a function which many of them fulfil so ably already in addition to their other duties.

Can you see any fundamental objection to the idea? After all, Rudolf Pfenniger painted recordings on film long years ago.

Pepys on Tape

IN MY opinion a well-kept diary is one of the most entertaining and, as with Mr. Pepys', instructive forms of literature. Judging by the popularity of Mrs. Dale's diary I am not the only one who finds a personal journal entertaining.

Like many other people I have kept a diary spasmodically and recently I picked up one which I kept long ago and I was soon engrossed in its pages. It dealt largely with a blonde I knew in those days and I read the faded ink of my record with mounting interest and excitement. I had just reached a critical point when, in a serial, one would come to the frustrating phrase "Another gripping instalment next week" and I turned over the page eagerly only to find it blank. I had obviously been suddenly interrupted—I mean, of course, in the writing of the diary—and had thereafter, for some unknown reason, not filled in the diary for several weeks, and so I shall always wonder what happened next as my memory does not help me.

I am glad to say, however, that this sort of thing is not likely to happen again as I have called electronics to my aid and am keeping a diary in trouble-free form. Instead of wearily pushing a pen at the end of the day I merely pick up the mike of a tape recorder. This is straight forward enough but I have taken a leaf out of Mrs. Dale's book by recording surreptiously the conversations I have with my friends.

I use a pocket recorder and a "buttonhole" mike which I have adapted in the form of a cuff link so that by suitably placing my arm in an apparently negligent pose I can put the mike in the most advantageous position.

A few weeks ago I took my apparatus with me when I paid a visit to friends whom I had not seen for many years. Mrs. Free Grid was with me and naturally her tongue and those of the other ladies present were soon busy saying things about absent friends which if repeated before witnesses would land them in an action for slander. In fact, the whole business has made me rather uneasy. If the cult of the pocket recorder becomes as popular as that of the candid camera we shall all have to guard our tongues for we shall never know when we are being "taped."

There is one ray of comfort and that is that I doubt very much whether evidence from a tape recorder would be admissible in court. Perhaps readers who are learned in the law can give me the benefit of counsels' opinion on this point.

Luxembourg on V.H.F.

IT is an astonishing thing to me how few broadcast receivers there are on the market which cater for v.h.f. only. I speak from bitter experience, as I have recently had very great difficulty in locating one. Reception of v.h.f. sound is available in some TV sets and also in many sets covering medium waves and, in some cases, the long-wave band as well.

What I object to is that I am compelled to pay for something I don't want, such as a medium- and long-wave range, in order to get something I do want. That means I am paying a higher price than I need to do. This idea seems to be copied from the coal industry's bad example of making us all buy a lot of slate in order to get a little coal.

I do hope that at the next National Radio Show, in which there is to be an audio section for the "hi-fi" enthusiasts, we shall see plenty of "v.h.f. only" sound sets. But a radio dealer tells me that this is not very likely, and the reason can be summed up in one word, "Luxembourg."

If that indeed is the reason I can only say that the sooner the B.B.C. relays Luxembourg in its v.h.f. service the sooner shall we be able to buy "v.h.f. only" sets at mass-production prices.

* A masterly understatement.—ED.

Britain's best Hi-Fi Equipment

We have devoted over 23 years entirely to the design and manufacture of audio equipment and we are proud of our position as leaders in this field. We were the first firm in the world to design and market Amplifiers having a total distortion content as low as 0.1%; a claim which was received with incredulity in 1945, but which was subsequently confirmed by the National Physical Laboratory and has become an accepted world-wide standard.

High engineering ideals have guided our efforts, and Leak Amplifiers have been the choice of the B.B.C., Commonwealth and foreign broadcasting authorities and Recording Studios. This acceptance by professional audio engineers has led to a demand for Leak equipment from music lovers throughout the world.

On the important question of prices it is appropriate to mention one of the basic principles of Leak design. From long experience and by extreme attention to design details during development work on the pre-production models, we enable our craftsmen to achieve a high output per man-hour. The labour costs thus saved offset the increased cost incurred for high-grade materials, components and finishes, and this, together with quantity production (made possible only by a world-wide market), explains how quality products may be sold at reasonable prices.

An important Test Report . . .

Independent laboratory tests of the Garrard 301 transcription turntable were recently carried out by Audio Instrument Company Inc., New York, U.S.A., under the direction of Mr. C. J. Lebel (Chairman of one of the groups which prepared the NARTB Standards). It was necessary that the pick-up and amplifier system should conform in response to the RIAA-new AES-new NARTB response curve within ± 1 db. and in the tests of this excellent transcription unit ***the components selected for use as complying with this requirement were a Leak tone arm fitted with Leak cartridge and a complete Leak pre-amplifier and power amplifier Model TL/10.***

The full test report appeared in the February, 1957, issue of "Wireless World," pages 22 and 23.





We invite you to complete the coupon below and post it to us for details of the NEW Range of Leak High Fidelity Equipment.

LEAK *The First Name in High Fidelity*

H. J. LEAK & CO. LTD., BRUNEL ROAD, WESTWAY FACTORY ESTATE, ACTON, W.3, ENGLAND.

Telegrams : Sinusoidal, Ealux, London
Telephone : SHEpherds Bush 1173/4/5 Cables : Sinusoidal, London

Please send details of

* ☐ FM Tuner
** ☐ Gram. Pickup
*** ☐ Amplifiers

☐ *Please send name and address of my nearest Hi-Fi dealer*

Name .....

Address .....

.....

W W./2/58

BARGAINS TO CLEAR

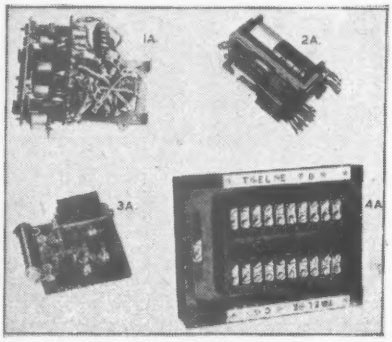

We wish to remind customers that with the new postage rates the minimum postage on a parcel is now 1/6. Orders for light-weight items which total over £3 will be sent post free otherwise sufficient must be included to cover postage. Also where a postage and insurance figure is specifically mentioned then this must be included regardless as these items have to be sent separately.

1a. OSCILLATOR UNIT—contains 4 coils, choke, condensers, four Philips Trimmers and numerous other useful bits and pieces, 2/6 each, 24/- per dozen.

2a. POST OFFICE TYPE RELAY—2 break 4 make, two separate closing coils each 350 ohms. New and boxed, 8/6 each.

3a. HIGH SPEED RELAY—American manufacture, adjustable make and break, coil resistance 2000 ohms. Base Panel size 2½ × 2½. Price 12/6 each.

4a. 20-WAY CONNECTING BLOCK—suitable for telephone and similar work, made for G.P.O. so good quality job. Size approx. 7in. × 5in. Price 8/6 each

5a. MIDGET DYNAMIC MICROPHONE—American made, also operates as earphone. 2/6 each. 24/- dozen.

6a. 1000 Ohm VITREOUS COVERED RESISTOR—120 watt clip-in type, length approx. 10in. 6/6 each. Mounting clips, 6/- dozen.

7a. STAND OFF INSULATOR—moulded high frequency, American make, 3/6 each.

8a. HIGH VOLTAGE MICA-CONDENSER—American Sprague, .01 mFd. 2,500 volts working, 5,000 volt tested. 3/6 each.

9a. TAPPED POWER RESISTOR (75 watts)—has sections 600 ohms, 300 ohms, 150 ohms, 75 ohms and 75 ohms. Metal ends not live. Length approx. 5½in. 4/6 each.





10a. DOUBLE PUSH SWITCH—spring return, porcelain interior, make good foot switch. Size approx. 3½in. × 2in. Price 4/6.

11a. DOUBLE FUSE BLOCK—removable fuses, 10/15 amp, 3/9 each.

12a. PORCELAIN THROUGH PANEL CONNECTOR—Heavy duty, complete with copper terminal. 5/- each.

13a. FULLY SHROUDED PUSH PULL TRANSFORMER—High inductance, primary and secondary, ratio 1—1.5. 8/6 each.

14a. 4mFd. MANSBRIDGE CONDENSER—1,000 volt working, 2000 volt test. size approx. 4in. × 5in. × 1½in. 4/6 each.

15a. 4mFd. MANSBRIDGE TYPE CONDENSER—600 volt working, 1,000 volt test, size approx. 2in. × 2in. × 5in. 2/9 each.

16a. FULLY ENCLOSED FILAMENT VOLTAGE CHANGING TRANSFORMER—Ratio 3-1 and 6-1. Price 5/6 each.

17a. CERAMIC SWITCH—2 pole change-over, 2/6.

18a. RELAY MOUNTING BRACKET—holds two relays, tapped 4BA. 3/- each.



19a. CARBON PILE REGULATOR—reference No. 5U/364T, on mounting base with terminal block and rectifier. 17/6.

20a. CARBON PILE—reference No. 5U2836 12/6 each.

21a. SMALL AMERICAN RELAY—coil resistance 650 ohms. 3/6 each.

22a. MAGNETO GENERATOR—for bell ringing etc. in wooden case with handle, 9/6 each.



23a. RELAY CONTROLLER/AMPLIFIER—for photo-electric cells etc., A.C. Mains operated, contains an Isolation Transformer. Yaxley Switch gives "Off", "Manual" and "Automatic". Sensitivity control sets the early closing current; the relay closes when resistance changes in grid circuit. Price £3/15/-.

AUTOMATIC MOTOR STARTER



For remote control of D.C. motor between 1 and 2 kw., adjustment for 100v. or 230v. Unused and in first-class condition, complete with metal and wired glass cover. Price £5, carriage 5/-.

VACUUM RELAY

American made type No C61610, this is a relay completely sealed in a glass envelope. It will close in a strong magnetic field or by a coil placed close to or round one of its arms. Price 49/6. Operating coils 25/-. each.

SPECIAL PURPOSE VALVES



Triode Type CV 1098, this is a high-powered air-cooled triode. Specification of which is as follows: Filament voltage 8.2 v., filament current 35 amps., anode dissipation 750 watts. Anode volts 25 kv. Suitable for R.F. heating two in push-pull under Class C conditions would have an output of 2 kilo-watts. Brand new, price £5 each. Carriage and insurance 10/-

TETRODE TYPE VT31

MANY OTHER TYPES IN STOCK. PLEASE STATE YOUR REQUIREMENTS.

This is a high-powered air-cooled tetrode. Specification of which is as follows—heater volts 11.25, heater current 8 amps., maximum anode voltage 5 kV., anode dissipation 250 watts, size approximately 14½in. long and 6½in. across the bulb.

Limited quantity only at £4 each, still in original packing. Carriage and insurance, 10/-.



UNITS FOR CONTROLLED AUTOMATIC ROTATION

Part of the radar system RC84. Work together to form a Tower rotating device with remote control.

Item 1, known as Tower 24A, is the geared driving motor which rotates the mast, a heavy construction would rotate a heavy scanner, beam array, etc.

Item 2, known as Indicator 1-221-A remote controller which enables the Tower 24A to be controlled from a remote point. Both Tower and Indicator contain selsyn transmitter/receivers that provide the impulses which cause the Tower to rotate.

Prices 1-221-A £25 plus carriage.
TR24A £35 plus carriage.

NOW TWO MODELS TURRET TUNER



Brand new stock, not surplus, with coils for Band I and III, complete with valves. Model 1.—I.F. output 33/38 mc/s. Series heaters. Model 2.—I.F. output 16-19 mc/s. Parallel heaters with, instructions and circuit diagram **79/6**. With knobs 3/6 extra, post and ins. 2/6.

14" T.V. CABINET

14in. T.V. cabinet of the latest styling—beautifully veneered and polished—limited quantity — sale price **19/6** ea. Carr. and packing 3/6 extra. **Masks 10/- extra.**

F.M. TUNER

This is a high fidelity unit which although moderately priced has a performance equal to the highest priced. Its stability is very good and extremely good results have been received with the simplest of aerials as far away as Eastbourne. The unit is made up ready to work and has its own power supply for A.C. mains. Demonstration at all our branches. Price **12 gns.** or **£1/12/-** down and 6 payments of **22**. Post plus insurance 5/-.

TRANSISTORS

A good range of transistor parts, miniature transformers, electrolytics, etc., available at all branches.

Red Spot and audio ..	10/-
Blue Spot 1.6 Mc/s. ..	15/-
Whit Spot 2.5 Mc/s.	20/-

TRANSISTOR TIMER

All the parts for making Transistor enlarging or process timer with constructional details. **£2/10/-**. Details separately **1/6**.

METER MOTORS



These are very small A.C. mains operated motors which have many applications for driving toys or other light loads. All are in good condition, but not new, having been stripped from electric light meters. Final speed of approx. 1 rev per hour. Price **8/6** ea. Post & insurance **2/-**.

THERMOSTATS

2½in. × 1in. × 1¼in. high. Useful for the control of appliances such as convectors, gluepots, vulcanisers, hot plates, etc. Adjustable to operate over temperature range 50-550 deg. F., fitted with heavy silver contacts. 1½ amp., **3/6**; 5 amp. **8/6**; 2 amp. QMB. **5/6**; 15 amp. QMB. **15/-**. 15 amp. wall mounting type, **19/6**.

Build this in ONE evening. 17" T.V.

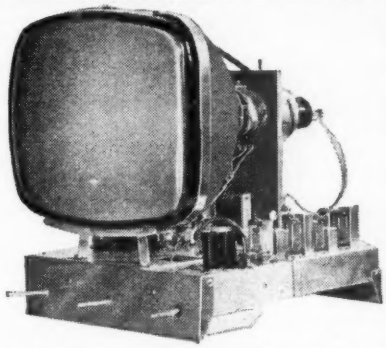

Undoubtedly the most up-to-date televisor for the home constructor. You can build it in an evening and the set when finished will be equal to a factory made equivalent. What other constructor T.V. has all these features?

- No technical knowledge required
- All miniature valves
- Metal rectifier
- Turret tuner
- 12-channel circuitry
- Multivibrator time bases
- Ferrox cube, E.H.T. and scan coils
- 34/38 mc/s. I.F.
- Suitable for any modern 12, 14 or 17in. tube

The building cost (less tube) is only **£29/10/-** plus 10/- carriage and insurance. Or **£5** down and 28 weekly payments of **£1**. New 17" Tubes available **£16/10/-**. All parts guaranteed twelve months.
Full information and data free with parts or available separately, price 3/6.

THIS MONTH'S SNIP

19 RANGE TEST METER

Can be yours for only 10/- deposit and 19 payments of 10/- weekly.

Like all AVO meters it is a very fine instrument; it has a sensitivity of 10,000 ohms per volt and 19 most useful ranges as follows:— D.C. volts 0-1000 (seven ranges), A.C. volts 0-1000 (five ranges), D.C. current 0-1 amp (5 ranges), resistance 0-2 megs. (2 ranges), (complete with test leads). Immediate delivery.

Cash Price £9 . 10 . 0

Non-callers please add 3/6 post and Insurance.

MULLARD AMPLIFIER



A Quality Amplifier designed by Mullard. Power output exceeds 10 watts. Frequency response almost flat from 10 to 20,000 C.P.S. For use with the Acos "Hi G" and other good pick-ups. Made up and ready to work is **£12/10/-** or **£1/10/-** down and 8 payments of **£1/10/-**, plus 10/- carriage and insurance.

MULLARD PRE-AMP. We are pleased to offer as a ready-made unit. It uses the low hum/noise high gain pentode type EF86. It takes its power supply from the amplifier and incorporates 2 switches to provide immediate compensation, for radio, microphone, L.P. and 78 records. The price of this unit is **£4**, post and insurance 3/6 extra. Or **10/-** down and 9 payments of **10/-**. If purchased with above, combined price is **£16** or **30/-** down and 8 payments of **£2**.

SPEAKER BARGAIN

12in. Hi-fidelity loudspeaker. High Flux. Permanent magnet type with standard 3 Ohm speech coil. Will handle up to 12 watts. Brand new by famous maker. Price 32/6, plus 2/6 post and insurance.

6 ft. UNBREAKABLE MAINS LEAD. This is the type of lead which is fitted to electric razors and similar appliances, makes fine lead for test meters and any other devices where the flex is subject to continuous bending and kinking. Twin figure eight construction, soft cream P.V.C. covered. Normally costs **2/-** per yard—we offer three leads for **3/9** post free; special quotes for large quantities.

MAINS ISOLATION TRANSFORMER



Makes servicing safe, also makes the adjustment for differences in mains voltages very simple. Input tapped 200-250v., output tapped 200-250v. Continuously rated at 500 watts, intermittent rating 2000 watts. Cable entry by terminal blocks, two separate screens for suppressing mains interference. Size approximately 14" × 6" × 6", weight approximately 40lbs. Price **£5/12/6**. Carriage and insurance 7/6 (up to 250 miles).

W.D. CIRCUIT DETAILS

Diagrams and other information extracted from official manuals. All **1/6** per copy, 12 for **15/-**.

American Service Sheets	R.109
A.1134	78 receiver
BC.348	76 receiver
BC.312	R28/ARC5
R.103A	R1116/A
B.C.349	RA-1B
BA-1B	AR88D
R-208	AN/APA-1
R-1155	78
R-1124A	76
R-1122A/R-1481	R.T.18
R-1147	CAY-46-AAM-RADAR
R-1224A	A.S.B.-3.
R-1082	Indicator 62A
R-1355	Indicator A.S.B.3
B.C.1206-A/B	Indicator 62
B-453-A (or -B)	Indicator 6K
B-454-A (or -B)	R.F. unit 24
B-453-A (or -B)	R.F. unit 26
Transmitter T1154/	R.F. unit 25
B.D.J.N.	R.F. unit 27
58 walkie-talkie	Wireless set No. 19
Frequency meter	Demobbed valves
B.C.221.	

GEAR PUMPS

Ex W.D. Will build up tremendous pressure. For hydraulic pumps, car lift, etc. Price 27/6, plus 2/6 post and packing.

ELECTRONIC PRECISION EQUIPMENT LTD.

266 London Road, Croydon.
Phone: CRO 6558.
Half-day Wednesday.

42-46 Windmill Hill, Ruislip, Middlesex.
Phone: RUISLIP 5780
Half-day Wednesday.

66, Grove Road, Eastbourne.
Half-day Saturday.

29 Stroud Green Road, Finsbury Park, N.4.
Phone: ARCHWAY 1049.
Half-day Thursday.

Post Orders and enquiries to Eastbourne address and please enclose postage terms are cash with order

As far away as China.....

WHARFEDALE MODEL SFB/3

Accompanies ballet performance before an audience of 1,200 in the King's Theatre, Hong Kong. 28th Aug. 1957.

K. C. Harvey, music critic of the "Hong Kong Standard," writes:
"Music for the Divertisement and the Rossini-Respighi score of La Boutique Fantasque was tape recorded and dispensed through truly hi-fi equipment, under the specialist direction of Albert Chan."

In the "South China Morning Post," Ernst Gottschalk comments:
"The tape-recorded music played by a great symphony orchestra, was technically so well produced that one seldom had the impression that one was listening to canned music."

Sound reproduction for this charity performance was provided by The Radio People Ltd. of Hong Kong, using two SFB/3 loudspeakers which can be seen clearly at each side of the stage in the photograph.

MODEL SFB/3
Specification
Size. 34" x 31" x 12".
Weight. 64 lb.
Impedance. 8-15 Ohms.
Bass resonance. 30-35 c/s.
Max. input. 15 Watts.

Price
£39 : 10 : 0
Complete
Tropical model with resin-bonded plywood can be supplied at £2 extra.

Wharfedale

Made and Guaranteed by
WHARFEDALE WIRELESS WORKS LTD.
IDLE · BRADFORD · YORKS.
Telephone: Idle 1235/6. Grams: Wharfdel Idle Bradford.

Estd. **L·R·S** 1925
EASY TERMS

LEAK QUALITY EQUIPMENT for the Connoisseur

THE LATEST
"TL/12 PLUS" POWER AMPLIFIER
and the
"VARISLOPE III" PRE-AMPLIFIER

are designed to give the highest possible fidelity from records, radio and tape. As supplied to Broadcasting Stations throughout the world. For the finest quality reproduction together with workmanship of the highest order—your choice must be LEAK.

Cash price of the complete amplifier is **£34/13/0.** We can supply for 9 equal monthly payments of £4/1/-. Carriage and crate paid.

All other LEAK equipment available on similar terms—also CHAPMAN and LOWTHER TUNERS. GARRARD & CONNOISSEUR Transcription motors, etc. In fact ALL Quality Equipment supplied over 9 equal monthly payments. 5% interest charge only.

We pay all carriage charges.

Prompt personal service to your requirements.

The L · R · SUPPLY COMPANY, LTD.
BALCOMBE (Tel: 254) SUSSEX

HEARING IS BELIEVING!

Dulci bring you the finest value in tape recording —

the brilliant new DULCI *Harting*

TAPE UNIT

Serious enthusiasts in sound reproduction are astounded by Dulci Harting performance and features. Here are some of them . . .

- **Recording amplifier incorporated with erase and bias oscillator.**
- **Playback equaliser and pre-amplifier integrated on the deck.**
- **2 speeds—7½"/sec. and 3¾"/sec.**
- **Precision numerical position indicator.**
- **Electronic recording level band indicator.**

Control panel superbly styled in modern high impact polystyrene to give streamlined design.
All ready for addition to an existing Hi-Fi system.

Price 55 gns. including tape and spare spool.

DULCI *Harting*

THE DULCI COMPANY LTD.
97-99 VILLIERS ROAD, LONDON N.W.2 *Willesden 6678/9*

In a single application, Araldite epoxy resins combine such diverse functions as bonding, impregnating, insulating and providing surface finishes of remarkable protective value. This rotating magnet generator, made by Ericsson Telephones Limited for telecommunication equipment, has a greater output than other generators of the same drive torque. It incorporates heavy-gauge iron sheet laminations bolted between diecast alloy end cheeks, and the coil is separately wound on to a moulded bobin which, when assembled, forms an integral part of the lamination structure. Dimensional accuracy between the end cheeks must be combined with a relatively large dimensional tolerance on the thickness of the laminations, and Araldite Surface Coating Resins have proved indispensable for impregnating the coil, locking the laminations, and imparting an excellent surface finish to equipment which also conforms to tropical specifications.

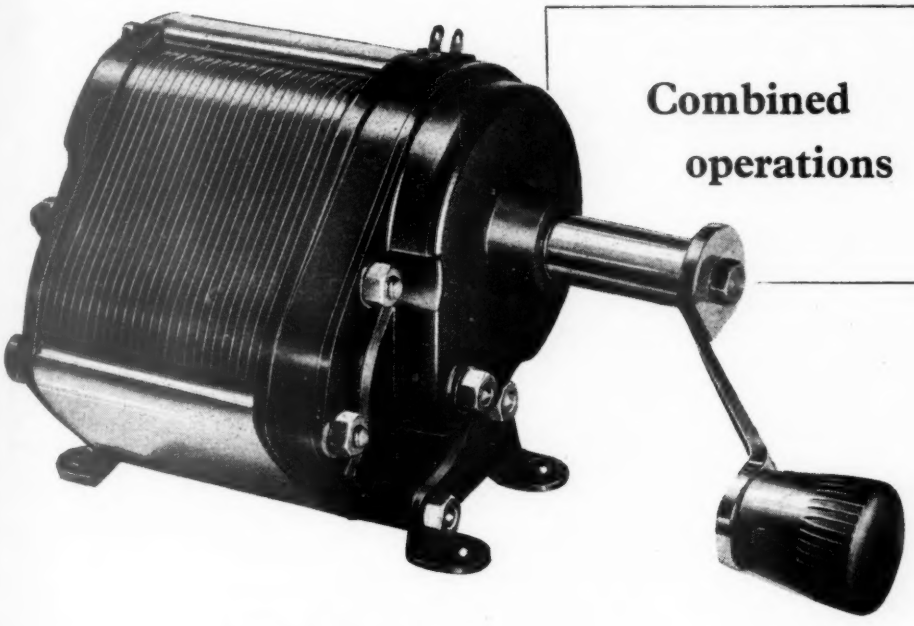

Combined operations

Araldite epoxy resins are used

- ★ for bonding metals, porcelain, glass, etc.
- ★ for casting high grade solid electrical insulation
- ★ for impregnating, potting or sealing electrical windings and components
- ★ for producing glass fibre laminates
- ★ for making patterns, models, jigs and tools
- ★ as fillers for sheet metal work
- ★ as protective coatings for metal, wood and ceramic surfaces

Araldite *epoxy resins*

Araldite is a registered trade name

Aero Research Limited *A Ciba Company. Duxford, Cambridge. Telephone: Sawston 2121*

AP 321

S.C.R. 399 WHOLE INSTALLATION

INCLUDING SHELTER H.D. 17A & 10 KW. PETROL GENERATOR P.E. 95G AVAILABLE

Also available separately

TRANSMITTER B610E

Frequency range 2 Mc.-18 Mc. Three pretuned channels selected by switch. Frequency control regulated either by manually tuned MASTER OSCILLATOR or crystal controlled oscillator.

Power output 450 w. telegraph, 350 w. telephone.

Power supply 120 v. A.C. 50/60 cycles special auto-transformer 120/220 v. made by Hallicrafters can be supplied additionally.

Tube complement oscillator 6V6, doubler or buffer 6L6, intermediate amplifier 807 (2). Power amplifier 250 TH. HV Rectifier 866A(2). Voltage regulator VT139(3). Audio drive 2A3(2). Modulator 100TH(2). Rectifier 5Z3(2).

Complete with Speech amplifier, aerial tuning unit, tank coils, tuning units, microphone, key, connecting cables.

We guarantee full supply of all replacement parts for a minimum of 5 years after purchase.

P.C.A. RADIO

Offices and Works

BEAVOR LANE, HAMMERSMITH, LONDON, W.6

Telephone: RIV 8006/7

BRAND NEW ORIGINAL SPARE PARTS FOR AR88 RECEIVERS.

I.F. TRANSFORMERS 1st, 2nd, 3rd, 4th (for type D) **12/6** each or complete set of 6, **60/-**.
I.F. Transformers. Crystal Load. **12/6** each.
Plates escutcheons (for D and LF), **15/-** each.
Dials (for type D), **10/-** each.
Filter Chokes (for D and LF), **22/6** each.
Output Transformers (for LF), **30/-** each.
Crystal phasing (D), **2/6** each.
Antenna trimmers (LF and D), **2/6** each.
Filter Condenser 3×4μF, **£2/10/-**.
Condensers 3×.25 μF (D and LF), **2/6** each.
3×.01μF (D and LF), **2/6** each.
RF Antenna inductors (D and LF), **7/6** each.
Mains transformers (LF), **£3** each.
Small knobs (for LF and D), **4/-** each.



AVO MINORS in leather case, fully tested, **£5/10/-**. Packing and Carriage 5/-.



MARCONI SIGNAL GENERATOR. T.F.144G. Covering 85 kc/s. to 25 Mc/s. Postage and packing 20/-. **£70.**

2 K.V.A. TRANSFORMERS. 230/50 v. output adjustable by rotary switch. Can be easily adapted as a welding transformer. **£15.** Postage and packing 30/-.

R.109A RECEIVERS. Covering 2-12 Mc/s. 6 v. D.C. **£4/5/-**.
Carriage paid.

HIGH RESISTANCE HEADPHONES 4,000 ohms. Brand New, Ex W.D., boxed, Type D.H.R, **11/-** per pair, postage 1/6.

LOW RESISTANCE HEADPHONES. Brand new, Ex W.D., boxed, Type C.L.R. and D.L.R., **5/6** per pair, postage 1/6

1155L RECEIVERS COVERING TRAWLER BAND. Frequency range 200 kc/s.-500 kc/s. and 600 kc/s.-18.5 Mc/s. Working and guaranteed **£12/10/6.** Packing and carriage within U.K. £1.

MODULATION TRANSFORMERS (U.S.A., Collins), primary imp. 6,000 ohms. C.T., Secondary 6,000 ohms., 20W. **9/6** each.

SPARES for AR77E. Main Dial **8/-**. Bandspread Dia **8/-**. Clean dial window sheet **3/-** Terminal boards **3/-** each. 10in. shaft for switch **1/-**. Band indicator shutter plate **3/6**. Each item 1/- postage.

AMERICAN VALVE TESTER Model 314. Individual lever switches for each tube element. Roll Chart for American type valves. 220/30 V. a.c. Brand new in nice wooden case with leather handles. Full instruction booklet. **£10.** Carriage 10/-.

CONDENSERS, RESISTORS, COILS, TRANSFORMERS. Very large selection in stock.

813 (RCA) VALVE. New, originally boxed with guarantee, **£4** each, post paid.



AMERICAN HANDY TALKIE. Type B.C.611 including two operating crystals (5-6 Mc. band), **£19/10/-.** Postage and packing 10/-.

P. C. RADIO LTD.
170, GOLDHAWK RD., W.12 SHEpherds Bush 4946

PERSONAL CALLERS WELCOME

The ANTIFERENCE

FILTER UNIT FOR BANDS I, II & III

for use as a

DIPLEXER

OR

TRIPLEXER

THE NEW Y3

RETAIL PRICE 13/6 COMPLETE WITH STANDARD COAXIAL PLUG

COMPLETE WITH STANDARD COAXIAL PLUG

BICELFLUX ENAMELLED COILS

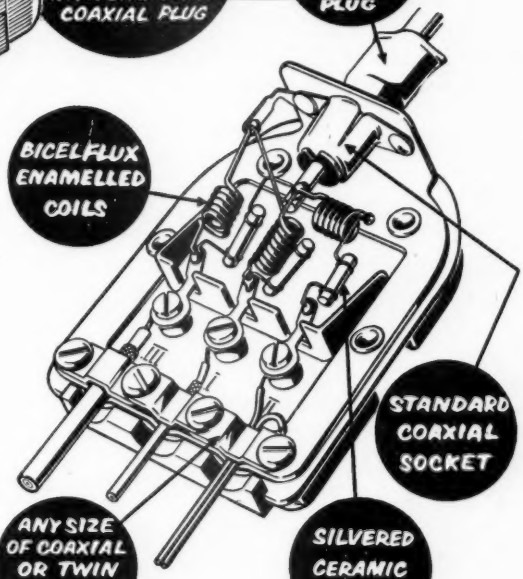

STANDARD COAXIAL SOCKET

SILVERED CERAMIC CAPACITORS

ANY SIZE OF COAXIAL OR TWIN FEEDER CABLE

- ★ High "Q" circuit with all 'open' components.
- ★ Minimum insertion loss.
- ★ Maximum attenuation of unwanted bands.
- ★ Easy to connect—standard coaxial socket and cord cable grips.
- ★ Any size of downlead—coaxial or twin feeder cable.
- ★ Fully insulated — unbreakable 'snap-on' cover.

STANDARD PLUG & SOCKET FOR COAXIAL CABLE

Coaxial Plug, Cat. No. TVP/1
Coaxial Socket, Cat. No. TVS/1
Both 8d. each.

This new standard plug and socket fully conforms to the R.E.C.M.F. Electrical and Mechanical Specification and whilst it is interchangeable with all similar plugs and sockets, it incorporates many advantages.

ANTIFERENCE LIMITED, AYLESBURY, BUCKS.
Telephone: Aylesbury 2511 (6 lines)

ANTIFERENCE LIMITED

X-band microwave measurement

PRODUCT OF N.V. PHILIPS, EINDHOVEN

Undirectional Waveguide PP4420x.

An important new range of equipment by **PHILIPS**

This new range of Philips microwave equipment is based on years of patient research and unique practical experience in Philips own specialised laboratories and factories. Of advanced conception and design, it will enjoy a special place in the microwave field. Some special features of the range include:

- **Unusually high technical standard—proved by many rigorous quality and life tests.**
- **Corrosion-resistant—all vulnerable parts heavily silver-plated and 'flashed' with gold.**
- **Finest quality finish. Specially developed *inexpensive* stands for all components in standard X-band waveguide.**

SEND TODAY for technical brochure giving full information on Philips microwave equipment.

PHILIPS ELECTRICAL LTD Research & Control Instruments Division
Century House · Shaftesbury Avenue · London · W.C.2

(PRC0253)

From a ¼ watt resistor... to a multi-band VHF receiver

WEBB'S RADIO

FOR UNRIVALLED STOCKS

"from bits and pieces to the finished job"

WESTREX "ACOUSTILENS' 20/80" LOUDSPEAKER

Bears a luxury price and quite definitely gives luxury results. Extraordinary realism and diffusion, in fact words fail us in describing this speaker. We can only ask you to listen and assess what other speakers lack.

The Acoustilens in cabinet costs **£169**

W.B. "HF816"

A good 8in. unit at a very reasonable price. Properly mounted it sounds very nice indeed. 16,000 gauss magnet. Speech coil matches 3, 7.5 and 15 ohms. Handles 6 watts. 50-14,000 c.p.s.

The HF816 unit costs **£5.17.0**

COLLARO "STUDIO" TRANSCRIPTION PICKUP

Has an established reputation and continues to offer real "hi-fi" at a very reasonable price **£5.0.5**

GARRARD T.P.A. 10/G.M.C5 PICKUP

Hear this new pickup and you will agree it makes a worthy companion to the renowned Garrard "301" motor. Fitted with diamond for L.P. and sapphire for 78.

Price including T.P.I transformer **£15.9.4**

ACOUSTICAL ELECTROSTATIC LOUDSPEAKER

£52

is on demonstration and in great demand against regular deliveries. Combines unobtrusive realism with convenient size.

ACOUSTICAL QUAD II AMPLIFIER

The de luxe amplifier which has all the answers. **£42**

ROGERS "MINOR Mk. III" AMPLIFIER

An excellent amplifier at a "down to earth" price. Integral controls. This amplifier, built with all the Rogers know-how, gives true hi-fi.

It costs a modest **£14**

"There's always something new at Webb's"

Webb's cater for all purses—whether de luxe, reasonable or rock bottom economic.

WEBB'S RADIO, 14 SOHO STREET, OXFORD STREET, LONDON, W.1. *Tel.: GERrard 2089*

Shop Hours: 9-5.30 (Thursdays 7 p.m.) Saturdays 9-1 p.m.

THE WAYNE KERR
RADIO FREQUENCY BRIDGE Type B.601

A wide range transformer ratio-arm bridge for the measurement of resistance, capacitance, inductance and complex impedance at frequencies between 15 kc/s and 5 Mc/s.

Due to the three-terminal facilities offered by the bridge, it is finding increasing use in the determination of transistor parameters and characteristics.

Amongst the numerous applications possible with a bridge of this design are the measurement of components *in situ*, stray capacitance and transfer admittance.

SPECIFICATION

Capacitance: 0.01 pF to 0.02 μF
Resistance: 10Ω to 10 MΩ
Inductance: 0.5 μH to 50 mH
Accuracy: 1%
Frequency range: 15 kc/s to 5 Mc/s
Price: £140

WAYNE KERR

Makers of Scientific Instruments

THE WAYNE KERR LABORATORIES LTD., ROEBUCK ROAD, CHESSINGTON, SURREY. LOWER HOOK 1131

H

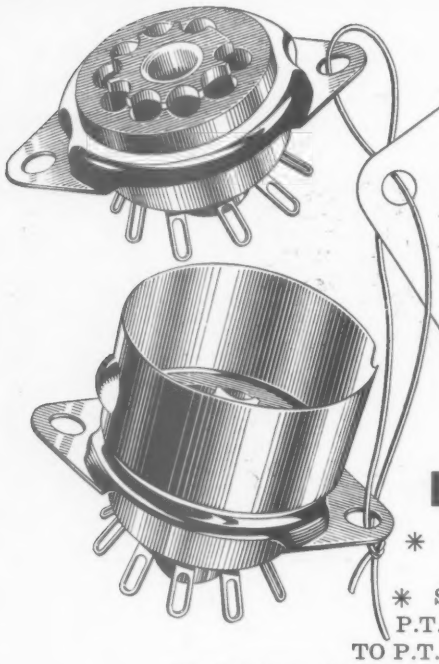

McMURDO

P.T.F.C.E. VALVE HOLDERS

B7G AND B9A

* LOW LOSS—GRADE 1.
* FULLY TROPICALISED—CLASS H 1.
* SILVER PLATED PHOSPHOR-BRONZE CONTACTS.

P.T.F.C.E. MOULDINGS HAVE SIMILAR PROPERTIES TO P.T.F.E. BUT THEY ARE LESS COSTLY TO PRODUCE.

FULL INTER-SERVICE TYPE APPROVAL TO Z.560092-Z.560094-Z.560095-Z.560134

Send for full technical details to:—

McMURDO INSTRUMENT CO. LTD., VICTORIA WORKS, ASHTEAD, SURREY. Telephone: ASHTEAD 3401

MVH. 14

ARMY SIGNALLING LAMPS



12 volt, in metal container with carrying strap. Contents: 3 spare bulbs, operator's lamp and spare bulbs, morse key, plugs and 3 coloured screens (red, green, amber).

12/6 P. & P. 2/6

CHARTBOARD ANGLE LAMP

With clip-on end. Suitable for Colleges, Offices, Draughtsmen, etc. Bayonet fitting Globe.

£1.0.0 P. & P. 2/-



12 VOLT RECEIVERS type 1125d

Contents: two 9D2 valves, 3-1 intervalve transformer, one mu-metal multi-ratio transformer, etc.

10/- P. & P. 2/-

POWER FACTOR CONDENSERS

160 μF 290 V.r.m.s. 50 cycles. Fitted with discharge resistance. In manufacturer's cases.

£2 P. & P. 5/-

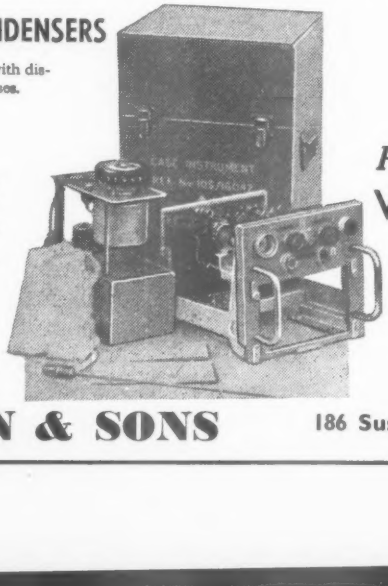

LOUD SPEAKERS

18 L. × 18 W. × 8 deep Cabinet.
8in. Speaker with Transformer.
In good condition.

£1.0.0 P. & P. 5/-

Precision WAVEMETER

CAVITY TUNED

110–230 v. A.C. Complete with mains power lead, aerial assembly. New in transit case. Size: D 9in., W. 7¾in., L. 8¾in. 420 Mc/s—466 Mc/s.

£2.15.0 P. & P. 5/-

A. PRESTON & SONS

186 Sussex Way, London, N.19.
Phone: ARChway 5951

LINEAR

For ***HIGH SENSITIVITY!***
HIGHEST FIDELITY!
MAXIMUM RELIABILITY!
REASONABLE COST!

ANNOUNCING THE 'CONCHORD'

A HIGH FIDELITY 30 WATT AMPLIFIER INCORPORATING PRE-AMPLIFIER AND TONE CONTROLS

EMPLOYING THE LATEST MULLARD EL34 OUTPUT VALVES IN ULTRA LINEAR OPERATION AND HIGH GRADE SECTIONALIZED OUTPUT TRANSFORMER.



Size approx. 13 x 8½ x 7in. Stoved gold hammered finish Weight 14lb. For operation on 200-250 v. 50 c.p.s. A.C. mains. Or other voltages to order. A chrome-handled cover is available at 19/6.

15 GNS. Retail Price

The Following Outstanding Test Figures Include Pre-amplifier and Tone Control Stages

FREQUENCY RESPONSE.
(Exc. Rumble Filter.) ±1 d.b. 20-20,000 c.p.s.

RUMBLE FILTER.
12 d.b. per octave below 50 c.p.s.

BASS CONTROL.
Continuously variable +12 d.b. to −12 d.b. at 50 c.p.s.

TREBLE CONTROL.
Continuously variable. +12 d.b. to −6 d.b. at 12,000 c.p.s.

HUM LEVEL.
Referred to full output −73 d.b.

MAXIMUM POWER OUTPUT.
In excess of 33 watts.

MAINS POWER CONSUMPTION.
110 watts.

STABILITY.
Entirely stable with capacity of .08 mfd. in parallel with loudspeaker load.

EFFECTIVE OUTPUT IMPEDANCE.
0.9 ohms across 15 ohm terminals.

INPUT IMPEDANCE.
Both inputs 500k plus 10 pfd

NEGATIVE FEEDBACK.
Total 28 d.b.

SENSITIVITY.
Input (1) 20 millivolts for rated output.
Input (2) 200 millivolts for rated output.

HARMONIC DISTORTION.
0.05% at 10 watts. 0.1% at 20 watts.

OUTPUT SOCKETS.
Provide matchings for 3 ohm and 15 ohm loudspeakers.

EXTERNAL POWER SUPPLY.
300 v. 30 m/a. 6.3 v. 1.5 a. for radio tuner.

VALVES.
B.V.A. EF86, EF86, ECC83, EL34, EL34, GZ34.
Due to use of Mullard EF86 valves microphony is virtually nil.
As in our extremely successful 'Diatonic' two individually controlled inputs provide mixing facilities for microphone and gram., etc., etc.

The 'DIATONIC' HIGH FIDELITY 10-14 WATT ULTRA-LINEAR AMPLIFIER

WITH INTEGRAL PRE-AMP AND TONE CONTROLS



Size only 9-7-6½in. Weight 12½lb. Power consumption 20 watts. Outputs for 3 and 15 ohm loudspeaker.

12 GNS. Retail Price For A.C. mains 200-250 v. 50 c.p.s. Or other voltages to order. Chassis finish stoved hammered gold, or grey blue.

Attractive cover with chromium carrying handles now available at 17/6.

Full advantage has been taken of the latest component miniaturization developments to reduce unit size to a minimum.

Two high impedance input sockets are provided for microphone and gram., etc. Each input has its associated vol. control.

B.V.A. valves are employed, ECC83, ECC83, EL84, EL84, EZ81.

ALL TEST FIGURES INCLUDE PRE-AMP

FREQUENCY RESPONSE.
±2 d.b. 30-20,000 c.p.s

MAXIMUM POWER OUTPUT.
In excess of 14 watts.

RATED OUTPUT 10 WATTS.

SENSITIVITY.
Vol. (1) 22 millivolts for rated output.
Vol (2) 220 millivolts for rated output.

TREBLE LIFT CONTROL.
Continuously variable +6 d.b. to −13 d.b. at 12,000 c.p.s.

BASS CONTROL.
Continuously variable +13 d.b. to −18 d.b. at 50 c.p.s.

HARMONIC DISTORTION.
0.19% measured at 6 watts

HUM LEVEL.
Referred to maximum output −60 d.b.

NEGATIVE FEEDBACK.
Total 32 d.b

H.T. and L.T. Supply Point is included for a radio tuner.

ALSO AVAILABLE:

The L45. A compact High Quality 4-5 watt amplifier.

Size approx. 6-5-5½in. high. Sensitivity is 28 millivolts so that the input socket can be used for either microphone or gram., tape, radio tuner, etc. B.V.A. valves used are ECC83, EL84, EZ90. Controls are: Vol., Treble and Bass with mains switch. The Tone controls provide full compensation for long playing records. Output matching for 3 ohm loudspeaker.

Retail price **£5/19/6.**

THE LT45 TAPE DECK AMPLIFIER A complete unit (power pack and oscillator incorporated) ready for connection to A.C. mains. 3 ohm loudspeaker and practically any make of deck. Negative feedback equalization adjustment by multi-position switch for 3¾, 7½ and 15in. per sec.

Retail price **12 gns.**

THE LG3 GRAM AMPLIFIER. Overall size 6½ x 4½ x 2½in. Controls: Vol. and Tone (with mains switch). Output for 2-3 ohm loudspeaker. All above for 200-250 v. 50 c.p.s. A.C mains

Retail price **49/9.**

Send S.A.E. for Leaflets. **TRADE AND EXPORT ENQUIRIES TO—**

LINEAR PRODUCTS LTD. ELECTRON WORKS, Tel.: Leeds 23116 (3 lines). (Off Upper Town St.) Armley, Leeds

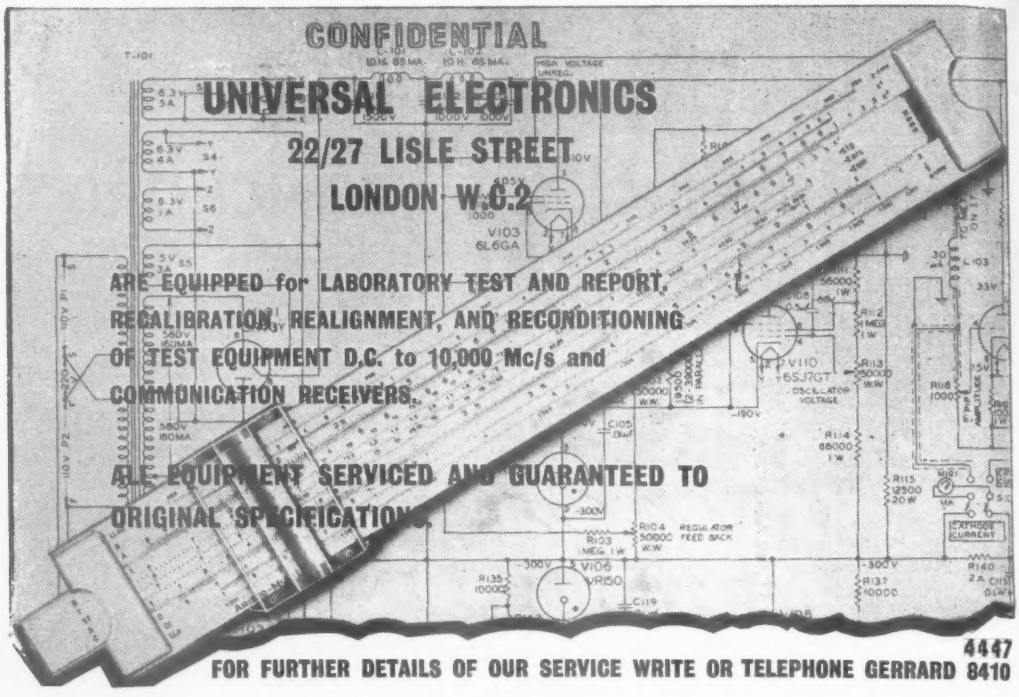

UNIVERSAL ELECTRONICS

22/27 LISLE STREET LONDON W.C.2

ARE EQUIPPED for LABORATORY TEST AND REPORT, RECALIBRATION, REALIGNMENT, AND RECONDITIONING OF TEST EQUIPMENT D.C. to 10,000 Mc/s and COMMUNICATION RECEIVERS.

ALL EQUIPMENT SERVICED AND GUARANTEED TO ORIGINAL SPECIFICATIONS.

4447

FOR FURTHER DETAILS OF OUR SERVICE WRITE OR TELEPHONE GERRARD 8410

CABINETS & HI-FI EQUIPMENT

£10 . 15 . 0

THE CONTEMPORARY. This beautifully made cabinet is oak veneered with mahogany interior and is waxed finished. Available in any shade to order at slightly extra cost.

This cabinet can be fitted with any of the latest Hi-Fi Units.

THE SERENADE. Veneered with finest selected walnut beautifully polished to a medium shade; this attractive cabinet has generous storage space, with board sliding out smoothly on metal rollers.

This cabinet can be fitted with any of the latest Hi-Fi Units.



£12 . 19 . 6



£16 . 16 . 0

THE BUREAU. This popular bureau cabinet is veneered with the finest selected Walnut and beautifully polished in a medium shade. Designed to accommodate almost any of the many units we have available and to give generous storage compartments.

Special Oak finish available to match G Plan Furniture. £18-18-0

HI-FI CHASSIS



Empress 9-valve de Luxe AM/FM with 2 speakers	£27/6/-
Empress 6-valve AM/FM with speaker	£23/2/-
Empress 6-valve AM/FM de Luxe self-powered Tuner	£23/2/-
Empress 5-valve FM Tuner	£13/15/-
Empress 5-valve AM Chassis	£14/5/-
Armstrong PB409	£29/8/-
AF105	£37/-/-
McCarthy 8-valve AM/FM	£22/10/-

PRE-AMPLIFIER/TAPE DECK. Latest Collaro Magnafon Mk. III, with pre-amplifier and bias oscillator, absolutely complete ready to connect to Radio or Amplifier ..... 36 gns.
Power Pack, extra ..... 4 gns.

GRAMOPHONE UNITS

Garrard RC98/4	£19 17 7	Collaro RC457	£9 19 6
RC88/4	£17 18 8	4T200	£19 10 0
4SP/D	£8 16 4	AC4/564	£9 7 0
301 STROBO	£28 0 1	B.S.R. UA8	£8 15 0
Lenco GL56	£23 7 0	Staar	£9 15 0



HI-FI LOUDSPEAKERS. *A small selection of our comprehensive range.*

Goodman's	Audiom 60 Bass	£9 12 9
"	Axiom 150 Mk. II	£11 5 9
"	Midax	£11 16 0
"	Trebax	£6 4 0
"	XO/5000 Crossover	£1 19 0
"	XO750/5000 Crossover	£6 15 6
W.B.	HF1012	£4 19 9
"	T10 Tweeter	£4 4 0

We supply all units and can fit any cabinet with the latest Hi-Fi amplifiers, tuners, transcription units, record changers, speakers, etc. Send for comprehensive illustrated catalogue of cabinets, autochangers, speakers, etc., all available on easy H.P. terms.

LEWIS RADIO COMPANY

120 (Dept. WWF) GREEN LANES, PALMERS GREEN (Nr. Cock), LONDON, N.13. Telephone: BOWes Park 1135/6

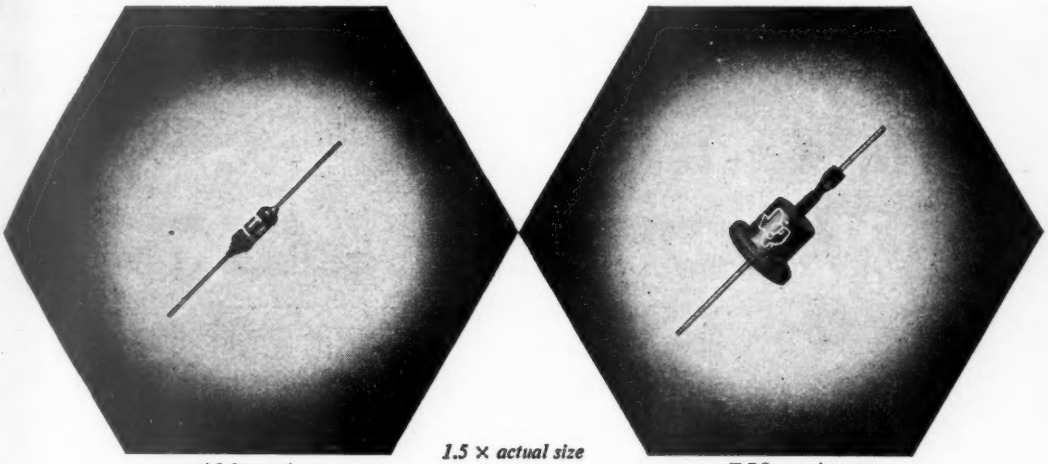

1.5 × actual size

400 mA

"Moly-G", hard glass hermetically sealed case.
Unit Weight 0.195 Grms.

750 mA

Hermetically sealed metal case.
Unit Weight 1.6 Grms.

NOW AVAILABLE

SILICON RECTIFIERS

200–600 volts P.I.V.

These new 'Texas' Diffused Silicon Rectifiers provide you with :—

High current with high voltage
High Forward to reverse current ratio
Wide operating temperature range

TYPE NUMBERS	Peak Inverse Voltage:	200	300	400	500	600 volts
	Moly-G:	1S111	1S112	1S113	1S114	1S115
	Metal Case:	1S001	1S002	1S003	1S004	1S005
				'MOLY-G'	'METAL CASE'	
MAXIMUM RATINGS	Average rectified Forward Current at 25°C			400	750	mA
	Average rectified Forward Current at 150°C			150	250	mA
	Recurrent Peak Forward Current at 25°C			1.25	2.5	Amp.
	Surge Current 1 Sec. D.C. at +25°C to 150°C			3.0	15.0	Amp.
SPECIFICATIONS	Max. Reverse Current at P.I.V. 25°C			0.2	10.0	μA
	Max. Reverse Current at P.I.V. 100°C			15.0	300	μA
	Max. Voltage Drop at I_o=400 mA at 25°C			1.0	1.0	volt

Please write for Data Sheets of these Rectifiers and of our comprehensive range of Silicon Transistors.

TEXAS INSTRUMENTS LIMITED

DALLAS ROAD · BEDFORD · TEL: BEDFORD 68051 · CABLES: TEXINLIM, BEDFORD

F.3A

It pays to specify

EGEN

POTENTIOMETERS

Egen potentiometers can be *relied* upon. Every part, from the tag to the track, is the very best of its kind. Add outstandingly intelligent design and you see why more and more engineers specify EGEN.

NEW 1¼" RANGE



Measuring 1¼" diameter, Type 181 is without a switch. Type 183 has a double-pole Q.M.B. switch and Type 243 *a heavy-duty double-pole Q.M.B. switch specially designed for Television.* These controls are available with tappings at 33%, 50% or 60% of slider rotation, also with terminations suitable for printed circuits.

NEW WIRE-WOUND PRE-SET for group assembly

Among recent additions to the EGEN range is Type 189. It has an easily replaceable wire-wound track with good heat dissipation and can be grouped with Type 166 carbon pre-set controls on a common panel.

EGEN

ELECTRIC LIMITED

CHARFLEET INDUSTRIAL ESTATE

CANVEY ISLAND · ESSEX · ENGLAND

of great interest to Television set Manufacturers

direct TV REPLACEMENTS

offers capacity for the production of

Time-Base Components

70° and 90° components produced to your own specification or as developed by our specialists.

Short or long production runs undertaken.

For further information contact:—

CONTRACTS DEPT.

direct TV *Replacements*

138 LEWISHAM WAY, NEW CROSS, S.E.14

Telephone: TIDeway 6666-8 Grams: Flibak, London.

Can't make up your mind which Tape recorder?

Pound for pound. you get more with a SONOMAG. More fidelity, more flexibility (3 speeds) more performance. The latest Collaro deck, with 3-digit rev. counter is standard. And both portables (see the new Continental-styled model) and the Adaptatape are designed to operate in circuit with your Hi-Fi amplifier and speakers. Hear them all, count the cost and you'll decide on SONOMAG.

Write for full details now to:

SONOMAG LIMITED

2, ST. MICHAEL'S RD., STOCKWELL, LONDON, S.W.9

Telephone: BRIXTON 5441 (3 Lines)

Best Buy at Britain's



CRYSTAL CALIBRATORS, Mk. 2. Ultra modern miniature design, only 9 × 7 × 6½in. Gives 1 Mc/s, 100 Kc/s, and 10 Kc/s marker pips as selected. Requires 60 v. H.T. Controls: On/Off, Modulation On/Off, Adjust 100 Kc/s, Adjust 10 Kc/s. Supplied complete with five 1T4, one 1R5, 1 Mc/s B7G based crystal and headphones. Despatched in specially designed original transit case **ABSOLUTELY BRAND NEW.** £5/19/6.

MARCONI LOOP AERIAL type 696. A small, compact, enclosed loop. On swivel mount with degree scale. **BRAND NEW.** 69/6. Post 2/6. Ideal for R1155, etc.

RT34/APS-13 AMERICAN 70 cm. TRANSMITTER-RECEIVER. Complete with nine 6AG5, five 6J6, two 2D21, one VR105, and dynamotor. Has 34 Mc/s I.F. strip. **BRAND NEW,** in original cartons. 69/6. Carr. 5/6.

BATTERY CHARGERS. Input 230 v. A.C. Output 12 v. D.C., 1.5 amps. In neat grey metal case, 7 × 6 × 5in. **BRAND NEW.** 35/-.

SPEAKERS (Eddystone). 3 ohms, 6½in. diam. In grey wrinkled steel cabinet 9 × 9 × 5in. Complete with volume control and transformer for 600 ohms line. **BRAND NEW.** 27/6. Post 2/6.

VHF TRANSMITTERS. BC-950A–130. 100–150 Mc/s, 4 channel, crystal controlled transmitter. Complete with valves, 2 of 1625, 2 of 832A, 1 of 8f5 (modulator). **BRAND NEW.** In original American packing. (Xtals not supplied.) £5/19/6. Carr. 7/6.

RT37/PPN2 BEACON TRANSMITTER-RECEIVER. 214–234 Mc/s. Size 13in. × 10in. × 5in. Contains 5 3A5, 3 1S5, 1 1R5 and 2 2 v. synchronous vibrators. Operates from 2 v. accumulator via 2 built-in vibrapacks. Complete with telescopic mast Antenna system (9½ft.), lightweight headphones. Technical Manual, super-quality carrying haversack, cords, co-ax cables, plugs, etc. Total wt. 28lb. **BRAND NEW,** boxed. American equipment, 72/6.

SCR522 TRANSMITTER-RECEIVERS. 100–150 Mc/s. Comprises BC624A rec., and BC625 trans. All complete with valves, and in first-class condition. BC624A, less relay, 39/6. With relay, 49/6. BC625, 49/6.

Two-Way MORSE TRAINING SETS, W/T Mk. 3. Consists of 2 valve oscillators (ARP12's) (one with pitch control), for 1 or 2 operators. Has provision for creating "atmospherics." In polished oak case 12½in. × 10in. × 8in., wt. 16lb. Complete with valves, leads, 2 keys, 7-way terminal board, circuit and instructions, but less batteries and phones. Ideal for Cadets, Scouts, etc. **SNIP,** 19/6. Carr 7/6

MAINS DIMMERS. 300 ohms, 1 amp., 300 watts, twin ceramic formers, 15/-. **CRYSTALS.** 200 Kc/s American GEC, 10/- each. 100 Kc/s RCA bars, 15/-.

AVOMETER Model D. £8-19-6 (P. & P. 4/-)

D.C. Volts	A.C. Volts	D.C. Current	A.C. Current
150 mV.	7.5 V	15 m/A.	75 m/A.
300 mV.	15 V.	30 m/A.	150 m/A.
1.5 V.	75 V.	150 m/A.	750 m/A.
3 V.	150 V.	300 m/A.	1.5 Amps.
15 V.	300 V.	1.5 Amps.	7.5 Amps.
30 V.	600 V.	3 Amps.	15 Amps.
150 V.	750 V.	15 Amps.	
300 V.	1.5 KV.	30 Amps.	Resistance
750 V.			0-1000 ohms.
1.5 KV.			0-10 K ohms.

Thoroughly overhauled. Complete with batteries and instructions An extremely robust meter at a very reasonable price.

REGRET PRICE ERROR IN PREVIOUS ISSUE.

SANGAMO WESTON Model E772 ANALYSER 10 Gns. (P. & P. 4/-)

A.C. and D.C. Volts	D.C. Current	A.C. Current
2.5 V.	100 micro-Amps.	0.5 Amp.
10 V.	1 milli-Amp.	1 Amp.
50 V.	10 milli-Amps.	5 Amps.
250 V.	50 milli-Amps.	
1000 V.	100 milli-Amps.	Resistance
	500 milli-Amps.	0-100 ohms.
		0-1000 ohms.
Output meter		0-100 K ohms.
		0-10 Megohms.

Supplied in neat black Rexine covered carrying case, complete with all batteries and instructions. Thoroughly overhauled and in perfect working order.

COMBINATION VALVE TESTER & MULTIMETER Brand new, ex.-U.S.A. For valve, circuit, capacity, and other testing purposes. In neat black crackled metal case with lid and carrying handle. 15 × 7½ × 5½in. Employs 4in. square-faced 100 micro-Amp. meter. Ranges: 0 to 10, 50, 250, 500 and 1000 v. A.C. and D.C.; 0 to 500, 150 K, 1.5 Meg., and 15 Megohms; 0 to 1, 10, 50 and 250 milli-amps. D.C. Valve tester has provision for "short" tests and inter-electrode voltages and currents. Supplied complete with instructions, valve charts and batteries, ready for use on A.C. mains. £14/19/6. Carr. 7/6.

HIGH RESISTANCE AVOMETERS. Similar to illustration. 20,000 ohms per volt D.C. D.C. current 50 micro-Amps to 1 amp.; D.C. volts 2.5 to 2500; A.C. volts 10 to 2500; Resistance 0 to 50, 0-50 K, and 0-5 Megohms. Supplied complete with magnetic screen and batteries. Tested and guaranteed. £14. Post 4/-.

AMERICAN MULTIMETERS

A good general purpose portable meter by Precision, U.S.A. Basic FSD 400 micro-Amps. Ranges: A.C. and D.C. volts 0 to 12, 60, 300, 600, 1200 and 6000; D.C. milli-Amps. 0 to 1.2, 12, 60 and 600; Ohms. 0 to 5 K, 500 K, and 5 Meg.; −10 to +16 dB. In polished wooden case with carrying handle and compartment for leads, etc. Size 7½ × 7½ × 5½in. Complete with batteries, tested and guaranteed. £6/19/6. Post 3/-.

AVO LC & R. BRIDGES. Capacity 5 pFd to 50 mFd; Resistance 5 ohms to 50 Megohms. Inductance can be measured against external standard. Balance is indicated on a meter, which can be used as a valve voltmeter from .1 to 15 volts. Leakage test and Power Factor scale. For use on A.C. mains, tested and guaranteed. £7/19/6. Post 3/6.

MULLARD C & R BRIDGES

0.1 ohms to 10 Megohms in 4 ranges: 10 pFd to 10 mFd in 3 ranges; Calibrate, Open Bridge, and % ranges. For 100-250 v. A.C. mains. Tested and guaranteed. £7/10/-. Post 3/6.

AMERICAN METERS. Brand new Westinghouse, flush, panel mounting, circular 2in. scale, 0-5 milli-Amps., with blank black scale. Boxed, 8/6. Post 1/-.

MEGGERS

Evershed and Vignoles Wee Meggers, 500 volts. Complete in leather case, with leads and instruction booklet. **BRAND NEW,** £12/10/-. Ditto., but 100 volts. **BRAND NEW,** £6/10/-. **INSULATION TESTERS,** by Record Electric. 0-50 Megohms, 500 volts. Tested and guaranteed. **ONLY** £8/10/-.

ADMIRALTY POWER UNITS. Equivalent to AM234. Input 200-250 v. 50 c/s. A.C. mains. Outputs 240 v. D.C. 125 m/Amps., and 6.3 v. A.C. 6 amps. Dual purpose 2½in. panel mounted 300 v. meter reads input and H.T. volts. Double smoothing with paper capacitors. Standard 19in. rack mounting. **BRAND NEW.** 79/6. Carr. 7/6.

MARCONI SIGNAL GENERATORS

85 Kc/s to 25 Mc/s. A.C. mains operation. In fair condition and working order. TF144F, £45. TF144G, £50.

MINIATURE 37/3 IF STRIPS. For FM tuner described in April and May "Practical Wireless." Complete with 3 of EF91, 2 of EF92, and 1 of EB91. A fresh release enables us to offer these once again. **BRAND NEW.** With circuit, 42/6, OR, less valves, 12/6. Post, either, 2/6.

TRIPLETT MULTIMETERS 25 Ranges: 0 to 5, 25, 100, 250, 1,000, and 5 kV D.C. (20,000 OPV); 0 to 5, 25, 100, 250, and 1,000 v. A.C. (1,000 OPV); 0 to 50 microA, 1, 10, 100 and 500 mA, 1 and 5 amps. D.C.; 0 to ½, 1, 5 and 10 amps. A.C.; 0 to 1,000, 100 K. and 10 megohms. Square meter, size 4 × 4in. Contained in 11½ × 8 × 5½in., wooden case, weight 10lb. Supplied complete with instruction book, batteries, leads and special high voltage leads. **BRAND NEW** ready for use and fully guaranteed. 15 gns. Post 5/-.

CERAMIC SWITCHES. Heavy duty (Wearite type), 4 pole, 3 way, 3/6. 2 pole, 6 way, 4 bank, 10/-. **BRAND NEW.**

OUTPUT POWER METERS. Ex-W.D., No. 3, Mk. 2 (Windsor 150 A.). Impedance ranges 2.5 to 20,000 ohms in 40 steps. Power ranges 0–5, 50, 500 milli-watts, and 0–5 watts. Also scaled in dB. 3½in. M/C meter. In oak case, 10½in. × 8in. × 5½in. Tested. £5/19/6. Post 3/6.

HEAVY DUTY BLOWERS. For 200–250 v. A.C./D.C. mains, 300 watts. With 1½in. diam. twin "V"-shape outlets. 2 lengths of hose. 4 spare filters and brushes. Suitable for industrial use, forges, etc. **BRAND NEW,** £4/19/6. Carr. 12/6.

RCA OUTPUT TRANSFORMERS. As used in MI-11220 Amplifier. Primary for push-pull 6L6's. Secondaries 5, 7.5, 15, and 600 ohms, and tertiary for NFB. 25 watts power rating. Potted construction, with tag connections. Full circuit of RCA amplifier supplied. **BRAND NEW,** 27/6.

HEAVY DUTY SLIDER RESISTORS. 0.4 ohms, 25 amps., 250 watts, worm drive, 7/6. 10 ohms, 3.5 amps., worm drive, 10/6. 1 ohm, 12 amps., 150 watts, 7/6.

MINIATURE STC RELAYS. 250 ohms coil. DP C/O (double contacts). 1½ × ¾ × ¾in. Wt. 1oz. 6 v. operation. 7/6.

VIBRATOR PACKS. Input 6 v. D.C. Output approx. 100 v. D.C. at 30 m/Amps., fully smoothed and R.F. filtered. Size 6½ × 5 × 2in. Fitted with Mallory 629C vibrator. **BRAND NEW.** Boxed. 12/6. **ANOTHER,** but 200 v. D.C. 100 m/Amps. With OZ4 valve and vibrator. **BRAND NEW.** Boxed. 25/-.

DUAL PURPOSE TRANSFORMERS (Gresham). Pri. 230/250 v. Secs., 240–0–240 v. 1.5 amps., 5 v. 12.5 amps., 5 v. 1.75 amps. Ideal for ISOLATING TRANSFORMER, to obtain TWO 240 v. 360 watt lines. Potted, oil-filled, 7 × 7½ × 10½in. high. Wt. 50lb. **BRAND NEW.** £3/10/-. Carr. 10/-.

MAINS ISOLATING TRANSFORMERS (Vortexion). Fully shrouded. For testing A.C./D.C. sets in safety. 230 v. input. Output 230 v. 100 watts, 22/6. Post 2/6. **JACK BOXES.** A small metal box fitted with 9 miniature insulated Igranic jack sockets. **BRAND NEW. SNIP.** 12/6.

CHARLES BRITAIN (Radio) Ltd.

11 UPPER SAINT MARTIN'S LANE LONDON, W.C.2. *TEMple Bar 0545*

One Minute from Leicester Sq. Station (up Cranbourn St.)

Shop Hours: 9-6 p.m. (9-1 p.m. Thursday) Open all day Saturday

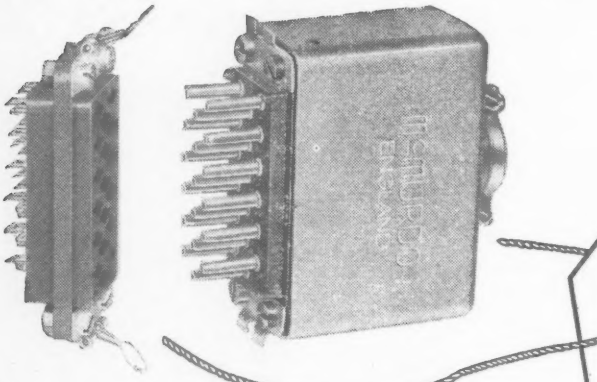

McMURDO STANDARD CONNECTOR

8 WAY | 18 WAY

12 WAY | 25 WAY

Sturdy, Reliable and Inexpensive
Nylon—PF mouldings. Silver plated contacts. Solid drawn aluminium cans. Positive locking mechanism.
Breakdown voltage 3.5kV.

Send for full details to :—

THE McMURDO INSTRUMENT CO. LTD.
ASHTEAD, SURREY. Telephone: Ashtead 3401

MSC 6

THE WORLD'S GREATEST BOOKSHOP

FOYLES

FOR BOOKS

FOR ALL YOUR

Technical Books

Join The Scientific Book Club!

Members buy Books (published at 12/6, 15/-, 16/- & more) for ONLY 4s! — Write today for details.

119-125 CHARING CROSS ROAD, LONDON, W.C.2

Gerrard 5660 (20 lines) ★ Open 9-6 (Thurs. 9-7)

Nearest Station: Tottenham Court Road

The "CONTI-BEAU" TAPE RECORDER CABINET

This Cabinet is the new Contemporary style in highly polished walnut veneered finish, fully grained, picked out with Continental brass strip work. A bureau-type cabinet with a drop front on the right-hand side, containing a removable deck board and storage space. The dimensions are: 2ft. 10in. long, 2ft. 8in. high overall (10in. high removable legs). 1ft. 3in. deep. The amplifier control panel on the left of the Cabinet is 1ft. 1in. × 1ft. 4in. and the tape deck compartment is also 1ft. 1in. × 1ft. 4in. which includes a compartment for spare tape spools. The Speaker compartment is covered by a pleasing gold and silver silk fret, which will house a 9in. × 5in. Elliptical Speaker with ample room for added tweeters if required. A very attractive Cabinet to blend with modern furniture. Trade price £10/10/- plus 15/- to cover carriage, insurance and packing

Send for our monthly bulletin and detailed list for Cabinets, Chassis and sundry electrical components.

V.E.S. WHOLESALE SERVICES LTD.

(Dept. W.W.) 11, Gunnersbury Lane, Acton, London, W.3. *Acorn 5027*

TELEVISION AERIAL COMPONENTS

DESIGNED FOR CONSTRUCTING BAND I & BAND III T.V. AERIALS

ELEMENT DIMENSIONS SUPPLIED FOR ALL CHANNELS

Selecting at random from our new multi-page catalogue:

★ Band III Folded Dipoles *(As illustrated)*
★ Reflector and director rod holders
★ Masthead Fittings for ¾", 1", 1¼" and 2" Masts
★ Mast Coupling units for 2" Masts
★ Insulators, both Rubber and Plastic *(As illustrated)*
★ Alloy Tubing for Elements, Cross boom and masting



Send 1/- P.O. for the revised, fully illustrated catalogue to :

FRINGEVISION LTD., Marlborough, Wilts. ***Phone 657/8***

WAFER SWITCHES TO SPECIFICATION

As we specialise *only* in the manufacture of small quantities of wafer switches (to individual specification) we guarantee competitive prices and fast delivery.

SWITCHES TO PUBLISHED DESIGNS (FROM STOCK)

G.E.C. 912-PLUS

S1 (14061/B1) } 14/6 pair
S2 (14062/B1) }

S4 (SS/556/1) ... 11/6

S5 (SS/556/2) ... 10/6

Mullard Tape Amplifiers

Amplifier "A"

SS/567/A }
SS/567/B } 32/6 the set
SS/567/C }

Amplifier "B"

SS/567/A 16/6

G.E.C. 88-50 Pre-Amplifier

Input Selector (state number of positions) ... 12/-
Treble Selector ... 7/9

Write for Price List and Design Chart.

SPECIALIST SWITCHES

23 Radnor Mews - Sussex Place
London W2 - AMBassador 2308

Suppliers to the leading electronics, aeronautical and automobile companies and to research institutions, the G.P.O. and Universities.

PRE-SET CONTROL LOCK

Designed to lock the spindles of pre-set potentiometers or trimmers without rotational or lateral displacement of shaft.

Will accept wide range of panel thicknesses.

TYPE P — Very attractive appearance for panel mounting

TYPE C — *Send for leaflet A.1*

"KNOB LOCK"

The ideal method of locking panel mounted controls. Positive guard against vibration, etc.

This development of our popular pre-set control lock is finished in black plastic and embodies control knob and instantaneous finger-tip locking knob.

Send for List No. A.6

SUTTON COLDFIELD ELECTRICAL ENGINEERS
Reddicap Trading Estate, Sutton Coldfield. 'phone SUT 3038 & 5663

ELECTRONIC
DRIVOMATIC
LABORATORY

INFRARED DEPARTMENT

LEAD SULFIDE PHOTOCELS

For all applications

- GUIDED MISSILES
- AUTOMATIC SIGNALLING
- PHOTOMETRY
- PARTICULAR PROBLEMS

PUBL. RAPY

34, RUE PERGOLÈSE - PARIS 16e
Tél. PAS. 52-43 & POI. 38-23 **FRANCE**

If you understand music...

. . . you will realise that Grampian high fidelity equipment gives you the nearest approach to "Concert hall listening" in your own home. You will, for instance, appreciate the extraordinary delicacy of reproduction achieved by their new 12in. loudspeaker. A great deal of research and new manufacturing methods were necessary to produce a speaker unit with such an extended audio frequency coverage at such a reasonable cost.

GRAMPIAN 12" SPEAKER UNIT

Type 1255/15



Frequency Range	20-15,000 c.p.s.
Voice Coil Diameter.....	1½in.
Voice Coil Impedance:	15 ohms
Fundamental Resonance:	40 c.p.s.
Power Handling Capacity:	10 watts.
Flux Density:	14,500 lines per sq. cm.
Total Flux:	130,500 lines per sq. cm.



CYCLES PER SECOND INPUT ½ WATT

RESPONSE CURVE for speaker unit 1255/15



A specially designed reflex cabinet suitable for either corner or side of room is now available as an easy-to-assemble kit of parts, complete with grille material ready to assemble, stain and polish. Although it is primarily intended for use with the Type 1255/15 speaker the cabinet will give excellent results with other units of similar specifications. Price **£11**

Deferred terms available if desired for both speaker and cabinet kit!

Full details from:

GRAMPIAN
REPRODUCERS LIMITED

Makers of quality high fidelity equipment

17 HANWORTH TRADING ESTATE, FELTHAM, MIDDLESEX

Telephone Feltham 2657/8

ASK ARTHURS FIRST

LARGE STOCKS OF VALVES and C.R.T.s. METERS, Avo, Advance, Taylor and Cossor Oscilloscopes in stock. AMPLIFIERS, Leak, Trix & Quad. GRAM UNITS, Garrard & Collaro. Collaro TRANSCRIPTION UNIT 2010PX.

LOUDSPEAKERS, Goodmans, Wharfedale, WB Tannoy and leading makes. PICK-UPS and STYLI of most makes. TAPE RECORDERS, Grundig, Philips, Truvox, Playtime & Ferrograph.

LATEST VALVE MANUALS

Mullard, 10/6; Osram & Brimar No. 6, 5/- each; Osram Part 2, 10/-.

Postage 9d. each extra.

PARTICULARS ON REQUEST

Terms C.O.D. OR CASH with order.

Arthurs EST. 1919

PROPS: ARTHUR GRAY, LTD.

GRAY HOUSE, 150-152 CHARING CROSS ROAD, LONDON, W.C.1

TEMple Bar 5833/4 and 4765 *Cables: TELEGRAY, LONDON*

PARKER'S SHEET METAL FOLDING MACHINES. HEAVY VICE MODELS

No. 1 (illustrated). Capacity, 18 gauge mild steel × 3ft. wide No. 2 Capacity 18 gauge mild steel × 2ft. wide No. 3. Capacity, 16 gauge mild steel × 18in. wide End folding attachments for Radio chassis, Tray or Box making, are supplied if required.



3ft. model, weight 56lb., **£6/5/-**. Carr. 10/- 2ft. model, weight 22lb., **65/-**. 18in. model, weight 18lb., **65/-**, carr. on small models 4/-. If with attachments 5/6. Attachment angle for 3ft. 3/6 per ft. Small models 2/- per foot.

Machines guaranteed *Send for details*

A. B. PARKER WHEATCROFT WORKS, STREET, BATLEY, YORKS. WELLINGTON *Tel.: Batley 426*

Manchester Office and Showrooms, 2 Sussex Street, off Norfolk Street, Manchester, 2

Insulating Sleevings

P.V.C. and POLYTHENE SLEEVINGS
INSULATED WIRES and FLEXIBLES
A.I.D and A.R.B. Approved

PLASTICABLE LIMITED
HAWLEY LANE
FARNBOROUGH, HANTS
Phone: FARNBOROUGH, HANTS 85

CATALOGUE FOR 1957 & HANDBOOK

L/P RECORD LIBRARY

POST 3/- FREE

- The only comprehensive selective catalogue of Classical L/P Records—listing only recordings recommended by the Critics.
- Nearly 4,000 discs listed (as already available to Library members).

Also sections on:—

- The care of Long Playing Records.
- The Reproduction of Long Playing Records.
- A Basis for a Record Collection (100 Recommended L/Ps).

If (like us) you love good music and find pleasure in good records, you will (we feel certain) be finding it increasingly difficult to choose from among the many fine L/Ps—just which to add to your collection. Now comes the perfect solution—the chance to borrow the pick of the L/Ps to play AT HOME—ON YOUR OWN GRAMOPHONE. FULL DETAILS OF THIS LIBRARY SERVICE (which costs approx. 1/- per week each L/P borrowed) are included in our Catalogue & Handbook—

THE L/P RECORD LIBRARY CLASSICAL CATALOGUE AND HANDBOOK FOR 1957

COSTS ONLY 3/- POST FREE (50 cents U.S.A.) (For Library details *without* Catalogue, please send large s.a.e. 2½d.)

?? YOUR QUESTION ANSWERED ??

We are frequently asked:—

In what condition are the Library records?

Records loaned by the L/P Record Library are in first-rate condition and worthy of reproduction on the finest high fidelity equipment. The very large majority are in **mint** or near-mint condition.

We can only suggest—take out a trial membership for yourself and see!!

From:— **THE LONG PLAYING RECORD LIBRARY, SQUIRES GATE STATION APPROACH, BLACKPOOL, LANCS.**

FACTORY FRESH — THE LONG PLAYING — FFSS RECORD LIBRARY — SALES SERVICE

FFSS STANDS FACTORY FRESH FOR SALES SERVICE

FFSS announces a new, high quality, Sales Service **operated exclusively by The L/P Record Library.** We have long realised that such a service was badly needed by the audio engineer and high fidelity enthusiast.

- **FFSS** indicates that the record purchased is not only a brand new, guaranteed unplayed, factory copy but that it has been obtained from the makers by special order for the purchaser. Besides being unblemished, the disc is also **as up-to-date a pressing as is currently available in this country.** This is tremendously important when it is realised that many of the older L/Ps (especially Decca) are currently being re-cut from the master-tapes by the manufacturers **with marked improvement in reproduction. FFSS** covers all record labels available in this country **except H.M.V.**
- **INSPECTION** before dispatch and only good pressings are chosen.
- **ADVICE** is given when needed and we can supply the best available recording.
- **STYLUS REPLACEMENT** Diamond or Sapphire—by return of post in most cases.
- **EQUIPMENT AND ACCESSORIES.** Our Reproduction Specialist Mr. C. T. Salisbury will be only too happy to advise personally on the best available within YOUR price range

WHY NOT MAKE A TRIAL ORDER NOW... (or send for more details enclosing large s.a.e. 2½d.)

A vitally important book for both technician and enthusiast fully covering the field for the first time

Over 2600 entries arranged and classified for instant reference
Cloth bound, 30s. post free



This monumental work represents the whole field of published information and research on high quality sound reproduction, from the subject's inception up to and including June, 1957. Because no one could possibly read even half of the vast output of literature on audio subjects, this bibliography on high fidelity has been eagerly awaited for many years.

K. J. Spencer has scanned the world literature on sound reproduction, including all the important research and institutional publications. This formidable and painstaking bibliographical research has resulted in a specialised work of reference which will be of invaluable and permanent benefit to all who wish to be able to consult, quickly and easily, what has been published on every aspect of high fidelity from Definitions to Installation and Maintenance. It is intended that from time to time supplements will be issued of currently published material.

A Bibliography of Sound Reproduction

An essential & authoritative reference book for everyone whose work or pleasure leads them into the exciting new world of

HIGH FIDELITY IN SOUND REPRODUCTION

Compiled by **K. J. SPENCER, ALA**
Foreword by **G. A. BRIGGS**

POST THIS ORDER FORM NOW

To IOTA SERVICES LTD
38 FARRINGDON STREET · LONDON EC4

Send me....copies of **HIGH FIDELITY**
for which I enclose remittance to the value of .....
Invoice us

NAME .....

ADDRESS.....

.....

.....

Henry's
RADIO COMPONENTS
ELECTRONIC & TELEPHONE EQUIPMENT

5, HARROW ROAD,
PADDINGTON, W.2.
PADDINGTON 1008/9 and 0401
CABLES: HENELEC, LONDON

SPUTNIK SPECIAL

Short-Wave Receiver 10 - 60 Mc/s (5-30 Metres).

Reception Set Type 208

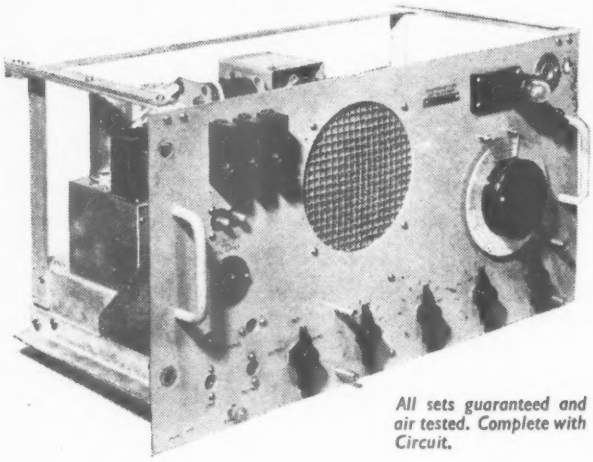

COMPLETE WITH 6 VALVES, TYPE 2-6K8G, 2-EF39, 6Q7G, & 6V6G. INTERNAL MAINS PACK & 6V. VIBRATOR PACK. BUILT-IN 6½" P.M. SPEAKER. MUIRHEAD DRIVE. R.F. STAGE & B.F.O. PROVISION FOR PHONES & MUTING, AND 600 ohm LINE. INPUT. 6VOLTS. D.C. & 100/250 V. A.C. 50 CY.

£6-19-6 CARR. 15/6d.

COMPLETE IN METAL CABINET
24 x 18 x 12" WEIGHT 70 lbs.

All sets guaranteed and air tested. Complete with Circuit.

BE PREPARED TO LISTEN TO THE SATELLITES ! ! !

A.C. SOLENOID TYPE SCM.



Continuous 3 ozs at ½"
Instantaneous to 2 lbs.
9/10ths FULL SIZE
Same dimensions as Type SC
Larger Sizes Available
Greatly increased Discounts for Quantities
Also Transformers to 7 KVA 3 Phase

R. A. WEBBER LTD.
18 FOREST ROAD, KINGSWOOD, BRISTOL Phone 67-4065

CAPACITY AVAILABLE

DEPENDABLE RELAY CO. LTD.
manufacturers of 3,000 & 600 TYPE RELAYS
have now moved to their new factory at
8a AINGER ROAD, LONDON, N.W.3.
Tel: PRI. 8161

CAPACITY AVAILABLE FOR RELAY ASSEMBLIES AND ASSOCIATED ELECTRONIC EQUIPMENT

including Transistorised Relay Units for Counters, Controllers, Timers, all electronic assemblies including chassis, specialists in cable forms.

Switch-tuned F.M.
(FREQUENCY CONTROLLED)
a Sensitive Unit of Quality

Size 4½" × 4½" × 5½"
Wiring diagram and holed chassis available.
Send S.A.E. for full circuit and constructional information.



Get these FREE CIRCUITS & WIRING DIAGRAMS

T.R.F. Circuits
Battery Circuits
Portable Circuits
S'het Circuits
Mains Circuits
Filter Circuits
T.V. Converter Circuits etc., etc.
Send 1/- in stamps for the lot!

OSMOR (Dept. WW19) 418 Brighton Road, South Croydon, Surrey Telephone Croydon 5148/9 OSMOR

HENRY'S
(RADIO LTD)

5 Harrow Road, Paddington, W.2

Opposite Edgware Road Station

PADdington 1008/9

OPEN MONDAY to SAT. 9—6. THURS. 1 o'clock.

Send 3d. for 28-page Catalogue.

QUARTZ CRYSTALS

FT—FUNDAMENTALS

80 Types 5706.667 Kc/s to 8340 Kc/s (in steps of 33.333 Kc/s).
120 Types 5675 Kc/s to 8650 Kc/s (In steps of 25 Kc/s).
(Excluding Types 7000/7300 and 8000/8300)

5/- EACH

Complete Sets of 80 Crystals **£6. 0 0.**
Complete Sets of 120 Crystals **£7. 10. 0.**

7000 Kc/s to 7300 Kc/s, in steps of 25 Kc/s
8000 Kc/s to 8300 Kc/s, in steps of 25 Kc/s **7/6 EACH**

FT2 41A—54th HARMONIC

80 Types 20 Mc/s to 27.9 Mc/s. (In steps of 100 Kc/s.).
(Excluding 24-25.9 and 27 Mc/s). **5/- EACH**

24-25.9 & 27 Mc/s 7/6 | Complete Set of 80 Crystals **£6**

100 Kc/s.	Gold-Plated D.T. Cut	15/-
100 Kc/s.	Two-Pin Box	15/-
150 Kc/s.	Two-Pin Round	12/6d.
160 Kc/s.	,, 10X	12/6d.
200 Kc/s.	FT241A	10/-
500 Kc/s.	FT241A	7/6d.
500 Kc/s.	Brooks	15/-
2500 Kc/s.	Octal	15/-
5000 Kc/s.	Piezo 2-Pin Holder	12/6d.

P.O. Type 4B Ceramic

100 Kc/s. 819.6 Kc/s. ... **15/- EACH**
163.9 Kc/s. 1000 Kc/s. ...

CERAMIC 2-PIN BANANA PLUG

15,010 Kc/s, 16,135 Kc/s. 16,435 Kc/s. 18,025 Kc/s.
15,110 Kc/s, 16,335 Kc/s, 16,700 Kc/s, 18,125 Kc/s. **7/6 EACH**

MARCONI S.T.C. 2-PIN 10X FUNDAMENTALS IN KILOCYCLES

1544.4	1764.5	2261	10,189	11,437
1561.1	1775	2295	10,233	11,501
1566.5	1780	2312	10,245	11,526
1566.75	1815	2315	10,300	11,587
1572.5	1870	2430	10,433	11,751
1579	1875	3270	10,445	11,788
1588.68	1890	3280	10,501	11,814
1613.25	1930	3310	10,511	11,851
1650	1981	3317.5	10,534	11,876
1668.2	2012	3390	10,545	12,600
1674.9	2055	3440	10,557	12,685
1680	2065.75	3630	10,567	AT
1690.5	2067.5	3850	10,622	
1700	2087.5	3920	10,755	7/6
1727	2089	3960	10,767	
1740	2090	4210	10,823	EACH
1761	2118.25	4860	10,856	
	2196	10,166	10,878	

FT241A 72nd HARMONIC CRYSTALS

32.5	32.7	36.4	36.6	5/- EACH
32.6	36.3	36.5	36.7	

T.C.S. CRYSTALS

1522.5	1700	2070.3	2105	2667.5	7/6
1572.5	1962.5	2072.5	2410	2865	EACH
1665.5					

CATHODE RAY TUBES

VCR139A	£1 15 0
VCR139A Mu-Metal Screen	5 6
VCR97. Full T.V. picture (carr. 2/-)	£2 0 0
VCR517C. Full T.V. picture	£1 15 0
MU-METAL SCREENS for VCR97 or 517 ...	10 0
VCR97. Slight-cut-off. Carr. 2/-	15 0
3PB1. Brand new	£1 10 0

MINI-TWO

TWO-TRANSISTOR MINIATURE POCKET RADIO. The smallest Transistor set offered on the market. Variable Tuning, Drilled Chassis, Plastic Case size 3in. × 2in. × ¾in. Miniature Hearing Aid, 2 Transistors and all components including 1½ volt Battery, Circuits and full practical layout diagrams.

Total Cost **49/6** Complete.

"EAVESDROPPER"

THREE-TRANSISTOR POCKET RADIO

(No Aerial or Earth required)

Medium Wave. Variable Tuning. Total cost, as specified, including Transistors, Transformers, Coils, Condensers and Battery, etc., with circuit and plastic case. **77/6** POST FREE

All items sold separately.
With single 'phone, 8/-. With Acos Mike, 9/-. With Min. Hearing Aid, 9/-

The New "TRANSISTOR—8"

Push-Pull Portable Superhet—Can be Built for £11/10/0

This Portable 8 Transistor Superhet is tunable for both Medium and Long Waves and is comparable in performance to any equivalent Commercial Transistor Set. Simplified construction enables this set to be built easily and quickly into an attractive lightweight cabinet supplied.

TEN STAR FEATURES

★ 8 Specially Selected Transistors
★ 250 Milliwatts Output Push-Pull
★ Medium and Long Waves
★ Internal Ferrite Rod Aerial
★ 7 × 4 Elliptical Speaker
★ Drilled Plastic Chassis 8½ × 2½in.
★ Point to Point wiring and practical layout
★ Economical. Powered by 7½V battery
★ Highly sensitive
★ Attractive lightweight contemporary case

We can supply all these items including Cabinet for **£11/10/-.** All parts sold separately.

Send for circuit diagrams, assembly data, illustrations and instructions, and full shopping list FREE. Post 3d.

Pair XC101's supplied 40/- extra. Call and hear demonstration model.

373 MINIATURE I.F. STRIP 9.72 Mc/s.

The ideal F.M. conversion unit as described in "P.W." April/May, 1957. Complete with 6 valves, three EF91's, two EF92's and one EB91, I.F.T.'s, etc., in absolutely new condition. With circuit **42/6** (with valves). Postage and Packing **2/6** (either type). **12/6** (less valves.)

TRANSMITTER RECEIVER

Army Type 17 Mk. II

Complete with Valves, High Resistance Headphones. Hand-mike and Instruction Book and circuit.
● Frequency Range 44.0 to 62 Mc/s.
● Range Approximately 3 to 8 miles.
● Power requirements: Standard 120V H.T. and 2V L.T.

Ideal for Civil Defence and communications.

BRAND NEW **59/6**

Calibrated Wavemeter for same, 10/- extra.

"HOMELIGHT"

2 Transistor Personal Portable

Variable tuning.

We can supply all components including 2 Transistors, Diode, Resistors, Condensers and Miniature Hearing Aid and Plastic Case size 4½ × 2½ × 1½ and 1½V Battery. FOR **52/6.** All items sold separately.

R.F.24. **10/-.** R.F.25, **12/6.** R.F.26, **25/-**
Brand new with valves, carr. 2/6.

EVERSHED WEE-MEGGERS

500 volt. Perfect working order. With leather case	£8 19 6
500 volt. Brand new. With leather case	£12 10 0

5-VALVE A.C./D.C. PORTABLE RADIO-GRAM CHASSIS
THREE WAVE BAND SUPERHET, 200/250V A.C./D.C.

(With Internal Aerial)

Short Wave 16-50m. Medium Wave 187-575m. Long Wave 900/2000m
(With Gram. Switching)

Well-known Manufacturer's product complete with Five Marconi Valves, type: X109, W107, DH107, N108 and U107 and 7 × 4 Elliptical Speaker. Ideal for Portable Radio-Gram. Chassis size: 10 × 4 × 4in.

£7/12/6 P.P. 7/6

Also available as above at the same price, similar chassis with following specifications: Short Wave 11.27—31.9m. Short Wave 31.2—91m. Medium 187—575m and Gram. Switching.

WALKIE/TALKIE TYPE 38. TRANSMITTER RECEIVER.

Complete with 5 Valves. In new condition. With circuit. These Sets are sold without Guarantee, but are serviceable.

22/6 p.p. 2/6.

H/Phones 7/6d. pair. Junction Box 2/6d. Throat Mike 4/6d. Canvas Bag 4/- Aerial Rod 2/6d.

EXCLUSIVE OFFER OF THE R.107

The Army's Finest Communications Receiver

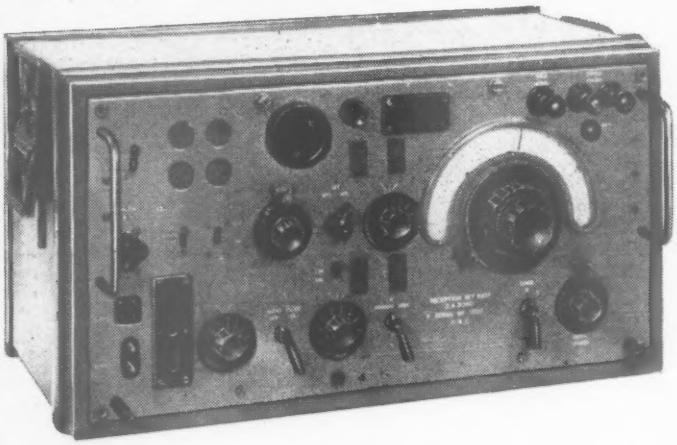

Just purchased from the Ministry of Supply, this magnificent 9 valve 3 Wave-band receiver gives World Wide Reception over a coverage of 1.2—17.0 Mcs. (18-250 metres), taking in several important Amateur Bands, Shipping Band, and part of the Medium Wave Band, including the B.B.C. Light Programme. The Sensitivity is 1 micro-volt on C.W., and 2-6 micro-volts on R.T. The controls include a Bandwidth Switch ("Wide" or "Narrow,") choice of AVC and BFO, Audio Filter, RF Gain, Aerial Trimmer. Has built in Output Stage with Internal Speaker, which can be switched out to use Headphones. Uses normal International Octal Valves. Incorporates AC Mains Power Unit for 100-250 volts, and Vibrator Pack for 12 volts D.C. In grey metal case, size 24 x 13 x 17in. These sets are slightly used, but in first class condition, thoroughly checked and aerial tested before despatch. Complete, ready to switch on ONLY £8/19/6 (carriage 20/- England and Wales, rest of U.K. extra).

COMPLETE, READY TO SWITCH ON **£8.19.6**

A HARRIS ELECTRONICS SPECIAL!

SEE ADVERT OPPOSITE



CR50 BRIDGE measures from 10pFd to 100mFd and from 1 ohm to 10 Megohms in fourteen ranges, having a total scale length of over 120 inches. Leakage test for condensers. Indication of balance is given by a magic eye fed from a high gain pentode. Internal standards of "Constants" 1% resistors. Robustly constructed for bench use, complete and ready for use from A.C. mains. **£8/2/6** plus 4/6 carr./packing.

SG50 SIGNAL GENERATOR covers 100kc/s to 80Mc/s in six ranges on fundamentals (not harmonics) either modulated 400 cps or CW. Frequency accuracy 2%. Uses 6AG5, 6C4 and RM1 with double wound mains transformer. A de luxe instrument housed in grey hammer finished case size 9 x 13 x 4in., with engraved Perspex scale. **£9** plus 6/- carr./packing.

VV50 VALVE VOLTMETER. Price **£8/2/6** plus 4/6 carr./packing. *Further details sent by return of post on receipt of self addressed stamped envelope.*

TRADE supplied direct. **CALLERS** always welcome.

GRAYSHAW INSTRUMENTS

126 Sandgate High Street, Folkestone, Kent
Phone: Folkestone 78618

Latest AVO TEST METERS

AVO METER MODEL 8 MARK II.
The latest version of this finest of all test meters is now available from stock. 50 microamp movement (20,000 ohms per volt). Eight D.C. voltage, seven D.C. current, seven A.C. voltage, four A.C. current and three ohms ranges. Fully detailed literature available free. Price **£23/10/-**. Credit Terms. Deposit **£3/9/-** and 7 monthly payments of **£3/3/-**. Leather carrying case, **£3**.

AVO MULTIMINOR
A new and very attractive pocket size instrument at a modest price. Movement is 100 microamps (10,000 ohms per volt). Six D.C. voltage, five A.C. voltage, five D.C. current and two ohms ranges. Descriptive leaflet available free upon request. Price **£9/10/-**. Credit Terms. Deposit **£1/8/-** and 7 monthly payments of **£1/6/-**. Leather carrying case, **32/6**.

WATTS RADIO (Mail Order) LTD
54 CHURCH STREET, WEYBRIDGE, SURREY
Telephone: Weybridge 4556
PLEASE NOTE. POSTAL BUSINESS ONLY FROM THIS ADDRESS

TRANSFORMERS
COILS *LARGE OR SMALL QUANTITIES*
CHOKES *TRADE ENQUIRIES WELCOMED*
SPECIALISTS IN
FINE WIRE WINDINGS
MINIATURE TRANSFORMERS, PICK-UP, CLOCK AND INSTRUMENT COILS, ETC.
VACUUM IMPREGNATION TO APPROVED STANDARDS

ELECTRO-WINDS LTD.
CONTRACTORS TO G.P.O., M.O.S., L.E.B., ETC.
123-5-7 PARCHMORE ROAD, THORNTON HEATH, SURREY
LIVINGSTONE 2261 EST. 1933

OSCILLOSCOPE

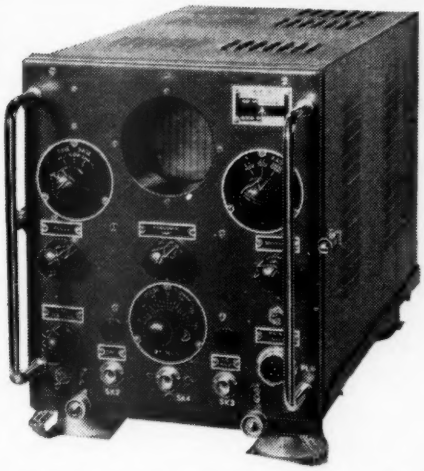

This Ministry of Supply Monitor Type 61 is a First-Grade Synchroscope of recent manufacture designed for D.C. Pulse and R.F. Envelope investigation, and employs a 3½in. CRT type VCR138A. The R.F. Frequency is 180-220 Mc/s approx.; and is tuneable in that range. Has internal 500 kc/s. Calibrating Oscillator on Y Plates. Existing Time Base Speeds are 50 cycles, 20 Micro-seconds fast, and 1,000 Micro-seconds slow. Conservatively rated Mains Power Pack is for nominal 115 v. and 230 v. Will make up into an excellent General-Purpose Oscilloscope at a cost of a few shillings, full modification date being supplied. Front panel size is 10½in. x 12½in., depth of unit being 19in. **BRAND NEW AND UNUSED, ONLY £12/10/-** (carriage, etc., 15/-).

MARCONI SIGNAL GENERATORS TF-517-F/1. Special offer of these Laboratory Signal Generators. Cover 10-18 Mc/s, 33-58 Mc/s. and 150-300 Mc/s. In good, used condition, with charts. Checked before despatch. Complete with power pack for normal A.C. mains. ONLY **£12/10/-** (carriage, etc., 20/-).

R1155 SUPER SLOW-MOTION TUNING ASSEMBLY. As used on all late model 1155s. Easily fitted to "A" sets, etc. ONLY **12/6.**

ROLA 6½in. P.M. SPEAKER. Mounted in Grey crackled metal cabinet 9in. x 9in. x 4½in., and with volume control. BRAND NEW AND UNUSED. ONLY **27/6.**

12-VOLT 1-AMP BATTERY-CHARGER. Very robust, ex Admiralty. In Grey crackled metal case, size 6in. x 6in. x 4½in. BRAND NEW AND UNUSED. ONLY **35/-.**

INSULATION TESTERS (MEGGERS). Read up to 20 megs. at 500 volts pressure. Overhauled, and in perfect order. With leather carrying case. ONLY **£9/19/6,** OR less case **£8/10/-.**

EHT TRANSFORMERS. 5.5 kV. (Rect.) with 2 v. 1 a., **79/6,** 7 kV. (Rect.) with 2 v. 1 a., **89/6.** 2.5 kV. (Rect.) with 2-0-2 v. 1.1 a., 2-0-2 v. 2 a. (for VCR 97 tube, etc.), **42/6** (postage 2/- per trans.).

500 MICROAMPS METER. 2in. circular as used on British No. 19 Wireless Sets. Calibrated 0-15 and 0-600 volts, resistance 500 ohms. A very fine instrument, and A SNIP AT ONLY **15/-.**

WIRELESS SET
No. 19 MK. II

The famous Army Tank Transmitter-Receiver. Incorporates "A" set (TX/RX covering 2.0-8.0 Mc/s., i.e., 37.5-150 metres); "B" Set (VHF TX/RX covering 230-240 Mc/s., i.e., 1.2-1.3 metres), and Intercomm. Amplifier. Complete with 15 valves as follows: 6 of 6K7G, 2 of 6K8G. 2 of 6V6G, and 1 ea. 6B8G, 6H6, E1148, EF50, 807, and booklet giving circuits, notes, etc. Size 17½in. x 8½in. x 12½in. Of American manufacture as previously offered by us, but another large release by the Ministry of Supply enables us to make a substantial reduction in price. In magnificent condition.
BRAND NEW AND UNUSED. ONLY **65/-** (carriage, etc., 10/-).
12-volt Power Units available **25/-** (carriage 5/-).

TCS TRANSMITTERS

The renowned American TCS Model designed by the Collins Company for static or mobile use. Covers 1.5-12.0 Mc/s. in 3 bands, and is complete with 7 valves, employing 2 of 1625 in P.A. Stage 1 each of 1625 in Buffer and Modulator Stages, and 3 of 12A6 in Oscillator Stage. Provision for VFO or Crystal Control. 4 Crystal positions. Radio Telephone or Radio Telegraph. Has Plate and Aerial Current Meters. Power requirements 12 v. LT & 400 v. HT. In black crackle case, size 11 x 13 x 11in., condition BRAND NEW AND UNUSED. ONLY **£12/10/-** (carriage, etc., 15/-).
The double Dynamotor Power Unit, Type 21881B for 12-volt operation, delivering 400 v. for Transmitter and 225 v. for Receiver, is available at **£12/10/-** (carriage, etc., 15/-).

METERS

F.S.D.	SIZE AND TYPE		PRICE
50 microamps D.C.	2½in.	Flush circular	59/6
100 microamps D.C.	2½in.	Flush circular	39/6
250 microamps D.C.	2in.	Proj. circular	30/-
500 microamps D.C.	2in.	Flush square	27/6
1 m/a D.C.	2in.	Flush square	22/6
150 m/a D.C.	2in.	Flush square	7/6
200 m/a D.C.	2½in.	Flush circular	12/6
10 amps D.C.	3½in.	Proj. circular	20/-
20 amps D.C.	2in.	Proj. circular	7/6
40 amps D.C.	2in.	Proj. circular	7/6
15-0-15 amps D.C.	3½in.	Flush square	25/6
15 volts A.C.	2½in.	Flush circular moving iron	8/6
300 volts D.C.	2in.	Flush square	10/6
300 volts A.C.	2½in.	Flush circular	25/-

MARCONI SIGNAL GENERATORS TF-390G rrequency coverage 16-150 Mc/s. BRAND NEW IN MAKER'S ORIGINAL TRANSIT CASES, with instruction manual. For normal A.C. mains operation. A unique opportunity to acquire Laboratory Equipment at a fraction of original cost. ONLY **£25.**

MARCONI BAND III CRYSTAL CALIBRATORS. Frequency range 170-240 Mc/s. Incorporates 5 Mc/s. crystal for better than .001 per cent. accuracy. Directly calibrated dial, internal A.C. mains pack. Complete with spare set of valves and instruction manual in maker's transit cases. BRAND NEW. ONLY **£4/19/6.**

12-WAY SCREENED CABLE. In 10ft. lengths, fitted with plugs, originally made for use with the 19 Set. UNUSED. ONLY **17/6** per lead.

POCKET VOLTMETERS. Not ex-Govt. Read 0-15 v. and 0-300 v. A.C. or D.C. BRAND NEW AND UNUSED, ONLY **18/6.**

CRYSTALS. British Standard 2-pin 500 kc/s. **15/-.** Miniature 200 kc/s. and 465 kc/s. **10/-** each.

SPECIAL MAINS TRANSFORMER OFFER. Normal 230v. A.C. Primary. Secondaries 330-0-330v. 100ma. 4v. 3 amps. Ex W.D., BRAND NEW AND UNUSED. ONLY **15/-.** (Postage etc. 2/6).

CHOKES. 10H 60ma. **4/-.** 5H 200 ma. **7/6.**

FILAMENT TRANSFORMERS. 6.3 v. 1½ amps. **7/6.** 6.3 v. 3 amps. **10/6.** 6 v. **VIBRATOR PACKS.** Output approx. 130 v. at 30 mA., fully filtered and smoothed. Complete. ONLY **12/6.**

Cash with order please, and print name and address clearly

PLEASE ADD POSTAGE OR CARRIAGE COSTS ON **ALL** ITEMS

HARRIS ELECTRONICS
(LONDON) LTD.
Formerly U.E.I. CORPORATION

Radio Corner, 138 Gray's Inn Road, London, W.C.1
Phone: TERMINUS 7937

Open until 1 p.m. Saturdays. We are 2 mins. from High Holborn (Chancery Lane Station) and 5 mins. by bus from King's Cross

G.W. SMITH & CO (RADIO) LIMITED

Phone: GERRARD 8204/9155
Cables: SMITHEX LESQUARE
3-34 LISLE STREET, LONDON, W.C.2

AVO MINOR LEATHER CASES. Brand new 7/6 each. P/P 1/-.

AVO MODEL 7 MULTIPLIERS. Extends 1,000-volt range to 4,000 volts. New, boxed, 5/6 each. P/P. 1/-.

MUIRHEAD VERNIER DRIVES. Brand new 7/6 each. P/P. 1/-.

U.S.A. RADIO CITY VALVE TESTERS. Brand new and unused, complete with instructions. 110/230 v. A.C. operation. Will test most type valves **£8/19/6** each. P/P. 5/-.

FURZEHILL CRYSTAL CALIBRATORS. Includes 6 valves and 1 mc/s. Xtal, giving pips at 10,100 and 1,000 kc/s. Battery operated, 2 v. and 120 v. Brand new and boxed **59/6** each. P/P. 3/6.

W.1191 WAVEMETERS. Portable precision battery operated frequency check meters, coverage 100 kc/s. to 20 mc/s. Supplied complete with all valves and 1 mc/s. Xtal and calibration charts. **£5/19/16** each. P/P. 6/-.

TAYLOR MODEL 160A OUTPUT METER. incorporates 4in. meter calibrated 0-25 mW. Meter multiplier, .01-.10-1.0-10-100. Impedance matching, 2.5-5-100-125-150-600-4,000-8,000-10,000-20,000 ohms. Supplied brand new, boxed and tested, **£14/10/-** each. P/P. 5/-.

AUDIO BEAT FREQUENCY OSCILLATORS. Frequency coverage 0 to 10 kc/s., with separate 50 cycle check point. O/P impedance 10 or 600 ohms. Built-in monitoring voltmeter. Operation 110/200/250 volts A.C. Not new but. supplied in good working order. **£9/19/6** each P/P. 10/-.

MARCONI VALVE VOLTMETER TF.428B/1. 5 ranges, .10 to 150 v. Brand new in original transit cases with spares. **£22/10/-** each. P/P. 7/6.

WAYNE KERR INSULATION TEST SETS. No. 5. 200/250 v. A.C. operation, giving a variable output of 1 KV. to 5 Kv. A.C. or D.C., calibrated on 4in. meter. Supplied in good working order complete with EHT probes. **£9/19/6** each. P/P. 10/-.

MARCONI TF-643 SUB-STANDARD WAVEMETERS. Frequency coverage 20 to 300 mc/s. in 4 bands. Supplied as new with all coils and calibration charts. **£19/10/-** each. P/P. 6/-.

MARCONI TF-373 IMPEDANCE BRIDGES. Ranges 0 to 100 H. 0 to 100 MF. 0 to 1 megohm. 0 to 100 Q. Supplied as new in original transit cases with spares. **£55** each. P/P. 10/-.

SPECIAL OFFER

OF MARCONI SIGNAL GENERATORS TF-517. Frequency coverage 16 to 58 mc/s. and 150 to 300 mc/s. Operation 200/250 volts A.C. Supplied in good condition at the ridiculous price of **£12/10/-** each. P/P. **£1.**

R.1155 COMMUNICATION RECEIVERS. New issue, in new condition, fitted with super slow motion drive. Supplied thoroughly checked and reception tested. **£8/19/6** each. P/P. 6/-.

R.1155 SUPER SLOW MOTION DRIVES. Improved version as fitted to Model L and N. Suitable for Model A, etc. Brand new **12/6** each. P/P. 1/-.

PORTABLE PRECISION VOLTMETERS



Brand new and boxed instruments by famous manufacturer. Housed in polished teak case. Moving iron movement reading A.C. or D.C. volts on 2 ranges. 0-160 v. and 0-320 v. 8in. mirror scale. Accuracy within 2%. Supplied at a fraction of original case. Only **£5/19/6** each. P/P. 3/6.

AMERICAN MULTI-RANGE TEST-METERS. 1,000 ohms per volt. 400 micro-amp basis movement. Ranges: volts, A.C. or D.C. 2.5, 10, 50, 250, 1,000 and 5,000 v. D.C. current. 1 ma., 10 ma., 100 ma. and 1 amp. Ohms. 500, 100 k. and 1 meg. Decibels, —10 to +69. The instrument is housed in polished wood case complete with test prods and instructions. As new, tested before despatch. **£5/19/6** each. P/P. 3/-.

AVOMETER MODEL D. Another large series Avo. Incorporates 10 D.C. volt ranges, 150 mv. to 1.5 kv. 8 A.C. volt ranges, 7.5 v. to 1.5 kv. 8 D.C. current ranges, 15 ma. to 30 amps. 6 A.C. current ranges, 75 ma. to 15 amps. Resistance ranges, 1 k. and 10 k. Supplied in perfect order, with instructions and leads. **£8/19/6** each. P/P. 4/-.

WESTON MODEL 722 TESTMETER. An ideal bench or portable instrument. Incorporates 5 A.C. or D.C. volt ranges, 2.5 v. to 1,000 volts. 6 D.C. current ranges, 100 microamp to 500 m/a. A.C. current, 500 ma., 1 amp., 5 amps. Resistance, 100 ohms, 1 K., 100 K. and 10 meghom. Supplied thoroughly tested in rexine covered carrying case with instructions and leads. **£10/10/-** each. P/P. 4/-.

EVERSHED AND VIGNOLES MEGGER LOW OHMS METER. The ideal meter for all circuit tests, continuity and polarity tests. Supplied brand new, unused, complete with leads, only **59/6** each. P/P. 3/-.

COSSOR DOUBLE BEAM OSCILLOSCOPE TYPE 339

Operation 110/200/250 volts. A.C. 120 watts. Time Base 10 positions. 6 cps. to 250,000 cps. Amplifier 10 cps. to 2,000,000 cps. Sensitivity, Y1.Y2.3.1 v. D.C. 1.1 v. rms. X. 2.25 v. D.C. .8 v. rms.

Supplied in good working order, complete with handbook and circuit. **£27/10/-** each. P/P. **£1.**

UNIVERSAL AVOMINOR TEST-METERS. Small, compact, accurate instrument. Resistance measurements from 0 to 20 k. ohms. D.C. volts from 0 to 500 v. A.C. volts from 0 to 500 v. D.C. current from 0 to 500 ma. Supplied in perfect working order, complete with leather case and leads. **£5/10/-** each. P/P. 2/6.

G.E.C. SELECTEST MULTI-RANGE METERS. Basic movement 1 ma. 1,000 ohms per volt. Resistance ranges, 0 to 1 meg ohm. D.C. volts from .15 v. to 1.5 kv. A.C. volts from 7.5 v. to 1.5 kv. A.C. current from 75 ma. to 15 amp. D.C. current from 1.5 ma. to 30 amp. Incorporates safety cut-out. Supplied in perfect working order, complete with leads. **£9/19/6** each. P/P. 3/6.

EVERSHED AND VIGNOLES WEE MEGGER 500 VOLTS. Special release, brand new and unused, complete with leather carrying case, only **£12/10/-** each. P/P. 2/6. Also avilable, secondhand models, but perfect working order, complete with leather case, **£8/10/-** each. P/P. 2/6.

MARCONI SIGNAL GENERATOR TF-144G

The famous laboratory standard. Frequency coverage 85 kc/s. to 25 mc/s. Output voltage from 1 microvolt to 1 volt. Operation 200/250 volts A.C. Offered reconditioned as new and guaranteed to be within original maker's specification, a certificate issued with each individual instrument. **£65** each. P/P. **£1.** Also available TF-390g. signal generators. 4 to 100 mc/s. Brand new in original transit cases. **£22/10/-** each. P/P. **£1.**

CAMBRIDGE INSTRUMENTS CURRENT TRANSFORMERS. Input 50 cycles, 300. 150 or 75 amps. Output 15 amps 2.5 KVA. Brand new and boxed. **£4/19/6** each. P/P. 4/-.

ADVANCE CONSTANT VOLTAGE TRANSFORMERS. Input 190 to 260 volts. A.C. 50 cycles. Output constant at 230 volts. Max. rating 150 watts. Supplied brand new in original crates. **£8/10/-** each. P/P. 5/-.

METER BARGAINS

50 microamp, 2½in. PJ.M.C.	49/6
100 microamp, 2½in. f.m.m.c.	59/6
500/0/500 microamp, 3½in. F.M.M.C.	49/6
500/0/500 microamp, 2½in. PJ.M.C.	19/6
50/0/50 microamp, 2½in. F.M.M.C.	69/6
1 ma., 2½in. F.M.M.C.	25/-
1/0/1 ma., 2in. M.C.F.M.	15/-
200 ma., 2½in. F.M.M.C.	9/6
1 amp., 2½in. F.M.M.C.	10/6
1.5 amp., 2in. F.M.M.I.	6/6
6/0/6 volt, 3½in. F.M.M.C.	32/6
300 volt A.C., 2½in. F.M.M.I.	25/-
4 KV. electrostatic, 3½in. F.M.	59/6

MARCONI 10CM. SIGNAL GENERATOR. Consisting of signal generator and power supply unit TF-854 and TF-853. Frequency coverage 9.1 to 10.7 centimetres. Operation 200/250 volts A.C. Supplied brand new in original transit cases with instructions. **£100** each. P/P. **£2.**

BENDIX COMMAND TRANSMITTERS. Complete with all valves and Xtal. Frequency coverage 2.1 to 3 mc/s. Only **22/6** each. P/P. 2/6.

AVO BATTERY ELIMINATOR POWER PACKS. Operation 200/250 volts A.C. Output 1.4 volts at 300 ma. and 67 volts at 10 ma. Stabilised by VS70, whole unit fully fused. Size 8½in. × 5in. × 3½in. Ideal for personal battery sets, etc., supplied brand new in maker's cartons. **39/6** each. P/P. 2/6.

5FT. P/O RACKS. Standard 19in., "U" channel. **59/6** each. P/P. 12/6

AMERICAN COMBINED VALVE TESTER AND MULTI-RANGE TEST-METERS. Brand new and boxed, complete with carrying case and instructions. Will test all standard American type valves and incorporates on the same panel a multi-range meter with the following ranges: 4 resistance 500 ohms to 15 meg. 5 A.C. or D.C. volt 10 to 1 KV. D.C. current 1 ma. to 250 ma. Only **£15** each. P/P. 7/6.

SPECIAL OFFER

BRAND NEW AMERICAN/CANADIAN No. 19 Mk. II TRANSMITTER-RECEIVERS. Complete with all valves. Frequency coverage 2 to 8 mc/s. **65/-** each. P/P. 10/-.

Limited number only available.

POST OFFICE TELEPHONE HANDSETS. Standard type, brand new and boxed, **12/6** each. P/P. 1/3.

AMERICAN TRIPLETT MULTI-RANGE TESTMETERS. A small compact instrument with the following ranges: volts A.C. 10 to 1 KV. Volts D.C. 10 to 1 KV. Current D.C. 10 ma. to 500 ma. Resistance 300 ohms to 250 k. ohms. Supplied in perfect working order complete with leads. **£4/17/6** each. P/P. 2/6.

AMERICAN DESK TELEPHONES. Complete units with handsets, bells and junction box. No dials, but can be fitted. Can be used on normal G.P.O. lines. Supplied brand new and boxed, **59/6** each. P/P. 3/–. English type also available, but with green handset, **49/6** each.

JOHNSON TX. CONDENSERS. Brand new and boxed, 500 pf. variables. **15/6.** P/P. 1/–. Also new, boxed, 2½in. variable inductances by Johnson. **22/6.** P/P. 2/6.

AR.88 WAVECHANGE SWITCHES. Spare for Model D. Ceramic, 8 bank, 6 pos., complete with all screens. Brand new. **17/6** each. P/P. 2/6.

2-VOLT 3 A.H. ACCUMULATORS. Exide, brand new, unfilled, 2/– each. P/P. 9d. Block of 12, wired as 24 v., 21/–. P/P. 4/6.

MUIRHEAD PRECISION STUD SWITCHES. Brand new and boxed. 4 banks, each bank 24 position. Heavy duty contacts. Only **17/6** each. P/P. 1/6.

L.T. TRANSFORMER BARGAINS. Type 1. 200/250 volt input. Output tapped 3, 6, 9, 12, 24 or 36 volts 5 amps. **35/–** each. P/P 3/–. Type 2. 200/250 volt input. Output 12 volts 5 amps. **12/6** each. P/P. 2/–.

D.C./A.C. ROTARY CONVERTOR. Input 24 volts D.C. Output 230 volts 50 cycles A.C., 100 watts. Unused. **92/6** each. P/P. 5/–.

6-VOLT VIBRATOR POWER PACKS. Output 120 volts 30 ma. Fully smoothed, uses standard 4-pin Mallory vibrator. New and boxed. **12/6** each. P/P. 2/6.

CRYSTAL MICROPHONE INSERTS. Sensitive, ideal for amplifiers, tape recorders, etc., **4/6** each. P/P. 6d.

POST OFFICE 20-WAY TELEPHONE JACK BOARDS. Standard fitting, brand new and boxed, **15/–** each. P/P. 1/6.

12-VOLT MOBILE AMPLIFIERS. Ex Admiralty. Separate mic. or gram inputs. Output 10 watts, matched to 3, 15 or 600 ohms. Supplied in good working order. **£8/19/6** each. P/P. 5/–.

HEAVY DUTY SLIDER RESISTANCES. 1 ohm 12 amp. **6/6** each. P/P. 1/–.

300FT. COPPER AERIAL WIRE. Ex U.S.A. Brand new. 3/6 reel. P/P. 1/–.

AMERICAN GEARED MOTORS. American 24 volt D.C. motor with built-in precision gearbox giving twin outputs 20 r.p.m. and 6 r.p.m. Will also operate on 12 v. giving reduced outputs. Size 7in. × 1¾in. Shaft dia. ¼in. Supplied brand new only. P/P. 3/–. **19/6** each.

SMOOTHING CHOKE BARGAINS. 10H. 60 ma., 4/6; 15H. 60 ma., 5/6; 8H. 100 ma., 8/6; 9H. 100 ma., 7/6; 10H. 100 ma., 8/6; 5H. 200 ma., 8/6; 20H. 120 ma., 10/6; 50H. 120 ma., 15/6; swinging choke 3.6-4.2H. 250 ma., **10/6.** P/P 1/– to 2/6.

AMERICAN MINE DETECTORS. Type SCR-625c. Battery operated portable and complete with instruction book. Ideal for detecting all types of metals. **£12/10/–** each. P/P. 10/–.

EX NAVY SOUND-POWERED TELEPHONES. This type requires no batteries to operate and can be fitted in moments to give complete inter-communication between two points. Hand generator calling. Only **45/–** each. P/P. 4/6.

RCA. OUTPUT TRANSFORMERS. Completely potted. Centre-tapped primary, 8,000 ohms. Secondary tapped 3, 7.5, 15 or 600 ohms. Separate feedback winding. 15 watts rating. Suitable for 6L6, EL84, etc., unused, **27/6** each. P/P. 2/–.

SPECIAL OFFER

OF ALKALINE NIFE ACCUMULATORS. Bank of 10 cells giving 12 volts 45 A.H. Unused in wooden crates. Only **£5/10/–** each. Also available, banks of 9 cells. **£4/19/6** each. P/P. 7/6 both types.

RCA. ET.4336 PLATE TRANSFORMERS. Special release, brand new in original maker's transit cases. Primary tapped 200 to 250 volts 50 cycles. Secondary 2,000/0/2,000 volts 400 ma., tapped 1,500/0/1,500 volts. Price **£12/10/–** each. P/P. **£1.**

EDDYSTONE MAINS POWER PACKS S.441B. Supplied brand new and unused. Input 200/250 volts. Output 300 volts 200 ma. and 12 volts 3 amps. Double choke and condenser smoothed, 5U4 rectifier. Housed in grey metal case, fully fused, indicator, etc. Only **49/6** each. P/P. 6/–.

A.C. MAINS VOLTAGE REGULATOR TRANSFORMERS. Input 230 volts. Output variable from 185 to 250 volts at a max. rating of 24 amps. Ideal for laboratory use, etc., supplied as new. **£15** each. P/P. 10/–.

MODULATOR 67



A wonderful complete A.C. mains power pack containing the following components. Transformer 350/0/350 v. 200 ma. 6.3 v. 6 a. 5 v. 3 a. Input 230 v. 200 ma., choke, 5Z4 rectifier. Paper and electrolytic smoothing condensers. 11 other useful valves. Hundreds of components including switches, pots, condensers, resistors, etc. Supplied brand new with covers.

SPECIAL REDUCED PRICE 39/6 each

P/P. 7/6

HEAVY DUTY MAINS ISOLATING TRANSFORMERS. Specifications: Primary 230 volts 3 amps. Secondary 230 volts 3 amps (service rating, OK 5 amps.). Ideal for laboratory or workshop use. Supplied brand new in original transit cases. **£6/10/–** each. P/P. 10/–.

GOODMAN'S 12in. HEAVY-DUTY LOUDSPEAKERS. 15 ohm speech coil. 15 watts rating. Brand new in sealed cartons. **£5/15/–** each. P/P. 5/–.

HEAVY-DUTY AUTO TRANSFORMERS. Ex Admiralty, made to highest specification. Tapped from 90 volts to 250 volts in 10 volt steps at 600 watts. OK for 750 watts. Brand new, only **69/6** each.

EDDYSTONE MAINS POWER PACKS

Supplied brand new and unused. Mains input 200/250 volts. Output 175 volts 60 ma. and 12 v. 2.5 a. Double choke and condenser smoothed. 5Z4 rectifier. Housed in grey metal case. Only **32/6** each. P/P. 3/6.

DYNAMO EXPLODER UNITS. Used for detonating explosive charges. Operation is by hand generator, giving 1,800 volts across output terminals. Ideal also as photo flash. Brand new, only **29/6** each. P/P. 3/–.

POST OFFICE JUMPER LEADS. Fitted with 2 standard jack plugs, brand new, 3/–. P/P. 6d. Panel jacks to fit **9d.**

AMERICAN ROTARY TRANSFORMERS Models available for either 6 or 12 volt D.C. input Output 250 volts 80ma. Ideal for car radios or razors etc., new and unused **22/6** each. P/P 3/.-

AMERICAN SUPER LIGHTWEIGHT HEADPHONES. Res. 50 ohms. Fitted with rubber earmoulds to fit inside the ear. Extremely good quality, ideal for communication receivers, etc. New and boxed. **15/–** pair. P/P. 1/–.

12-VOLT MIDGET ROTARY TRANSFORMERS. Type H.T.11, size 4½×2¾in. Output 310/360 volts 30 ma. New and boxed. **22/6.** P/P. 1/6.

BARGAIN GRAM MOTORS. Garrard centre-drive motors complete with turntables. 200/250 volt A.C. Adjustable mechanically from 0 to 45 r.p.m. Only **22/6** each. P/P. 3/–.

"C" CORE TRANSFORMERS

Special offer, all brand new and boxed. All types have 230 volt 50 cycle input. Type 1. 510/0/510 v. 300 ma. 375/0/375 v. 100 ma. 6.3 v. 9 a. 2×6.3 v. 2 a. 2×6.3 v. 1 a. 6.3 v. 1.5 a. 6.3 v. .5 a. 5 v. 3 a., **82/6.** P/P. 5/–. Type 2. 450/0/450 v. 250 ma. 2×6.3 v. 5 a. 2×6.3 v. 1 a. 5 v. 4 a., **65/–.** P/P. 4/6. Type 3. 450/0/450 v. 220 ma. 6.3 v. 6 a. 6.3 v. 3 a. 5 v. 3 a., **59/6.** P/P. 4/–. Type 4. 350/0/350 v. 400 ma. 25 v. 1 a. 21 v. .5 a. 6.3 v. 5 a. 6.3 v. 1 a. 5 v. 4 a., **65/–.** P/P. 4/6. Type 5. 360/0/360 v. 200 ma. 360/0/360 v. 65 ma. 6.3 v. CT 5 a. 6.3 v. CT 2 a. 6.3 v. 5 a. 5 v. 4 a. 5 v. 3 a., **65/–.** P/P. 4/6. Type 6. 3850 v. 5 ma. 4 v. 2.5 a. 4 v. 1 a., **52/6.** P/P. 3/–. Type 7 1250/0/1250 v. 5.5 ma. 6.3 v. 1 a. 6.3 v. 1 a. 4 v. 1 a., **42/6.** P/P. 2/6. Type 8. 6.3 v. 5 a. 6.3 v. 4 a. 2×6.3 v. 3 a. 6.3 v. 2 a. 6.3 v. 1.5 a. 6.3 v. 1 a., **45/–.** P/P. 2/6. Type 9. 3×6.3 v. 3 a. 6.3 v. 1.5 a., **32/6.** P/P. 2/–.

AMERICAN AUTO TRANSFORMERS. 110/230 volts. 40 watts. Small size, fully shrouded. Ideal for instruments, shavers, etc. Brand new, boxed, **12/6** each. P/P. 1/9.

FERRANTI POTTED FILAMENT TRANSFORMERS. Hermetically sealed, ceramic terminations. All new and boxed. Type 1. 200/250 v. input. Output 6.3 v. CT. 5.6 a., tapped 5 v. 6.3 v. CT. 4.8 a. tapped 4 v. 6.3 v. CT. 1 a. tapped 4 v., **19/6** each. Type 2. Input 200/250 v. Outputs, 6.3 v. CT. 3.3 a. tapped 5 v. 6.3 v. CT. 1 a. tapped 4 v. 6.3 v. CT. .9 a. 6.3 v. CT. .6 a., **15/6** each. P/P. 2/– each type.

INSTRUMENT POTENTIOMETERS. Brand new Colvern type. 100,000 ohms, 10 watts, 3¼in. dia. Ideal for bridges, etc., **10/6** each. P/P. 1/–.

MIDGET RECORDER MOTORS. Size 1½×1×2¾in. Operates from 4.5 to 24 v. D.C. Fitted with reduction gear. New and boxed. **12/6** each. P/P. 1/–.

CHARGING AND MODEL TRANSFORMERS

1. Pri. 200/250 v. Sec. 3.5, 9 or 17 v. 1 amp., **9/9.**
2. Pri. 200/250 v. Sec. 3.5, 9 or 17 v. 2 amp., **14/3.**
3. Pri. 200/250 v. Sec. 3.5, 9 or 17 v. 4 amp., **16/6.**
4. Pri. 200/250 v. Sec. 6.3 v. 3 amp., 8 v. 1.5 amp., **9/6.**
5. Pri. 200/250 v. Sec. tapped 3, 4, 5, 6, 8, 10, 12, 15, 18, 20, 24 or 30 volt 2 amp., **18/6.** Postage 1/6 all types.

L.T. METAL RECTIFIERS. Full wave and bridged. 12 v. 1 amp., **6/3**; 12 v. 2 amp., **9/3**; 12 v. 4 amp., **13/9**; 24 v. 1 amp., **12/6**; 24 v. 4 amp., **22/6**; 36 v. 4 amp., **27/6.** P/P. 1/– all types.

MINIATURE H.T. TRANSFORMER. Input 220/240 v. Output 220 v. 25 ma. 6.3 v. 1 a., new, **10/6** each. P/P. 1/–. Midget contact rectifier to match, **7/6.**

MINIATURE SLOW MOTION DRIVES. Dia. 1¾in. 180 deg. scale calibrated 0-100. For ¼in. spindles. New and boxed **7/6** each. P/P. 1/–. Larger type available **7/6** each.

G.W. SMITH & CO (RADIO) LIMITED
Phone: GERRARD 8204/9155
Cables: SMITHEX LESQUARE
3-34 LISLE STREET, LONDON, W.C.2

BATTERY CHARGING EQUIPMENT

SELENIUM RECTIFIERS

L.T. Types

2/6 v. ½ a.h.w.	1/9
6/12 v. ½ a.h.w.	2/9

F.W. Bridge

6/12 v. 1 a. ..	4/11
6/12 v. 2 a. ..	8/9
6/12 v. 3 a. ..	11/9
6/12 v. 4 a. ..	14/9
6/12 v. 6 a. ..	19/9
6/12 v. 10 a.	25/9

H.T. Type H.W.

120 v. 40 mA.	3/9
250 v. 50 mA.	5/9
250 v. 80 mA.	7/9
250 v. 150 mA.	9/9
300 v. 250 mA.	12/11

ASSEMBLED CHARGERS

6 v. 1 a.	19/9
6/12 v. 1 a.	27/9
6 v. 2 a.	29/9
6/12 v. 2 a.	38/9
6/12 v. 4 a.	56/9

Above ready for use with mains and output leads. Cases well ventilated and finished in stoved blue hammer. Carr. and packing 3/6.

BATTERY CHARGER KITS

Consisting of Mains Transformer F.W. Bridge. Metal Rectifier, well ventilated steel case. Fuses, Fuse-holders, Grommets, panels and circuit. Carr. 2/6 extra.

6 v. or 12 v. 1 amp. ..	22/9
6 v. 2 amps.	25/9
6 v. or 12 v. 2 amps.	31/6
6 v. or 12 v. 4 amps.	53/9

BATTERY CHARGER KIT Consisting of F.W. Bridge Rectifier 6/12 v. 5 a. Mains Trans., 0-9-15 v. 6 a. output, and ammeter. Only 49/9. Post 3/-.

ASSEMBLED CHARGER

6 v. or 12 v. 2 amps.

Fitted Ammeter and selector plug for 6 v. or 12 v. Louvred metal case, finished attractive hammer blue. Ready for use with mains and output leads. Double Fused. Only Carr. 3/6. **49/9**

All for A.C. Mains 200-250v., 50 c/s. Guaranteed 12 months

Assembled 6v. or 12v. 4 amps.

Fitted Ammeter and variable charge selector. Also selector plug for 6 v. or 12 v. charging. Double fused. Well ventilated steel case with blue hammer finish. Ready for use with mains and output leads. Carr. 3/9. Or Deposit 30/- and four monthly payments 13/-. **75/-**



AM/FM RADIOGRAM CHASSIS. HIGH QUALITY. PUSH PULL. 6-8 WATTS OUTPUT

Current manufacture. 12 months' guarantee. For 200-250 v. mains. Covers L. and M. Wavebands plus F.M. Includes 8 latest type miniature B.V.A. valves. Only 22 **gns.** plus 7/6 carr. Or deposit £2/12/- and 9 monthly payments of £2/12/-. Guaranteed 12 months.

CO-AXIAL CABLE. 75 ohms. ½in., **8d.** yard. Twin screened feeder 11d. yard.

ELECTROLYTICS (current production) Not Ex-Govt.

Tubular Types		Can Types	
8 mfd. 450 v.	1/9	16μF 450 v.	2/9
8 mfd. 500 v.	2/6	16 mfd. 500 v.	3/9
16μF 350 v.	1/11	32μF 350 v.	2/11
16μF 450 v.	2/9	32 mfd. 450 v.	4/9
16μF 500 v.	3/9	100 mfd. 450 v.	4/9
8-8μF 450 v.	2/11	8-8μF 450 v.	2/11
8-16μF 500 v.	4/11	8-16μF 450 v.	3/11
25μF 25 v.	1/3	16-16μF 450 v.	3/11
50μF 12 v.	1/3	32-32μF 350 v.	4/9
50 mfd. 25 v.	1/9	32-32μF 450 v.	5/9
50μF 50 v.	1/9	100-100 mfd. 350 v.	5/9
100 mfd. 12 v.	1/9	64-120 mfd. 350 v.	7/6
100 mfd. 25 v.	2/3	100-200 mfd. 275 v.	6/11
3,000 mfd. 6 v.	3/9		
6,000 mfd. 6 v.	3/11		

Many others in stock.

VOLUME CONTROLS with long spindles, all values, less switch, 2/9; with S.P. switch, 3/9.

EX GOVT. STEP UP/STEP DOWN TRANSFORMERS. Double wound 80/100 watts. 10-0-100-200-220-240 v. to 5-0-75-115-125-135 v. or Reverse. Only 11/9, plus 2/9 post. 10-0-100-200-220-240 v. to 9-0-110-122-136-148 v. or Reverse. 200 watts, 35/9, plus 7/6 carr.

EX GOVT. METAL BLOCK PAPER CONDENSERS

4 mfd. 350 v.	2/3	8 mfd. 500 v.	4/6
4 mfd. 1,000 v.	3/9	10 mfd. 500 v.	3/9

THE SKY FOUR T.R.F. RECEIVER

A design of a 3 valve 200-250 v. A.C. Mains L. & M. wave T.R.F. receiver with selenium rectifier. For inclusion in cabinet illustrated or walnut veneered type. It employs valves 6K7, SP61, 6F6G, and is specially designed for simplicity in wiring. Sensitivity and quality is well up to standard. Point-to-point wiring diagrams, instructions and parts list, 1/9. This receiver can be built for a maximum of £4/19/6 including cabinet. Available in brown or cream bakelite, or veneered walnut.

EX GOVT. VIBRATOR UNITS. 12 v. input 280 v. output. Suitable for car radio, etc., 16/6.

VIBRATORS. Oak and Wearite. Synchronous 7 pin 2 v. 7/9, 6 v. 8/9.

EX. GOVT. 50 WATT AMPLIFIERS. Brand new. For normal 200-250 v. 50 c.p.s. A.C. mains. Designed for speech only but with suitable pre-amp. could be used with Gram. or Radio. Valves included. Four 6L6s used for output. Complete with hand microphone with good length of lead. Unused in original transit cases. Only 9**gns.** Ready for use. Carr. 15/-.

RE-ENTRANT SPEAKERS, Tannoy 8 watt, 7·5 ohms suitable for above, 25/- each.

5 CORE FLEX. Henleys circular rubber 14/36. Each lead colour coded. 1/6 yard.

EX GOVT. MAINS TRANSFORMERS

All 200-250 v. 50 c/s input.	
120-0-120 v. 40 mA.	5/9
250-0-250 v. 60 mA., 6.3 v. 3 a., 6.3 v. 1 a. Potted 4½-3½-3in.	11/9
Pr. 0-110-200-230-250 v., 275-0-275 v. 100 mA., 6.3 v. 7 a., 5 v. 3 a.	21/9
230-0-230 v. 80 mA., 12.6 v. 1.5 a. 5 v. 2 a.	11/9
400-0-400 v. 250 mA. 5 v. 2 a., 5 v. 2 a...	18/9
12.5 v. 3 a., 5 v. 3 a.	12/9

MANUFACTURERS: SURPLUS TRANSFORMERS. Primary 200-240-250 v. Drop through type 250-0-250 v. 70 mA. 6.3 v. 3 a., 11/9. Postage 2/9.

EX GOVT. SMOOTHING CHOKES

300 mA., 20 H. 150 ohms	19/6
250 mA., 5 H., 50 ohms	12/9
150 mA., 10 H., 50 ohms	10/11
100 mA., 10 H., 100 ohms	6/9
100 mA., 5 H., 100 ohms, tropicalised	3/11
80 mA., 10 H., 350 ohms., tropicalised	3/11
50 mA., 50 H., 1,000 ohms	6/9

EX GOVT. CASES. Well ventilated, black crackle finished, undrilled cover. Size 14 × 10 × 8½in. high. IDEAL FOR BATTERY CHARGER OR INSTRUMENT CASE. COVER COULD BE USED FOR AMPLIFIER. Only 9/9, plus 2/9 post. Size 13½in. × 8in. × 6½in. with undrilled perforated cover finished in stoved grey enamel, 7/9, plus 2/9 post.

SPECIAL OFFERS. Small 2 gangs .0005 mfd., 4/9. Electrolytics 32-32-32 mfd. 250 v., 2/9 each or in lots of six, 2/3 each.

R.S.C. BATTERY TO MAINS CONVERSION UNITS

Type BM1. An all dry battery eliminator Size 5½ × 4½ × 2in approx. Completely replaces batteries supplying 1.4 v. and 90 v. where A.C. mains 200-250 v. 50 c/s. is available. **Suitable for all battery portable receivers requiring 1.4 v. and 90 v.** This includes latest low consumption types. Complete kit with diagram. 39/9 or ready for use 46/9.

Type BM2. Size 8 × 5½ × 2½in. Supplies 120 v., 90 v., and 60 v., 40 mA. and 2 v. 0.4 a. to 1 amp. fully smoothed **THEREBY COMPLETELY REPLACING BOTH H.T. BATTERIES AND L.T. 2v. ACCUMULATORS** when connected to A.C. mains supply 200-250 v. 50 c/s. SUITABLE FOR ALL BATTERY RECEIVERS normally using 2 v. accumulator. Complete kit with diagrams and instructions, 49/9, or ready for use, 59/6.

JUNCTION TRANSISTORS For R.F. 17/6.

MINIATURE MOTORS. 24/28 v. D.C. or A.C. Size only 2½ × 1½in. Spindle 1½in. long, ¼in. diam. Made by Hoover Ltd., Canada. Price only 9/9.

M.E. SPEAKERS. 2-3 ohms R.A. 8in. Field 600 ohms., 11/9.

R.S.C. TRANSFORMERS

FULLY GUARANTEED. INTERLEAVED AND IMPREGNATED.

MAINS TRANSFORMERS
Primaries 200-230-250 v. 50 c/s.

FULLY SHROUDED UPRIGHT MOUNTING

250-0-250 v. 60 mA., 6.3 v. 2 a., 5 v. 2 a.	17/6
350-0-350 v. 70 mA., 6.3 v. 2 a., 5 v. 2 a	19/9
250-0-250 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	23/9
250-0-250 v. 100 mA., 6.3 v. 6 a., 5 v. 3 a., for R1355 conversion	31/-
300-0-300 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	25/9
350-0-350 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	25/9
300-0-300 v. 130 mA., 6.3 v. 4 a., c.t., 6.3 v. 1 a., suitable for Mullard 510 Amplifier	33/9
375-0-375 v. 150 mA., 6.3 v. 4 a., 5 v. 2 a.	29/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	33/9
350-0-350 v. 150 mA., 6.3 v. 2 a., 6.3 v. 2 a., 5 v. 3 a.	33/9
425-0-425 v. 200 mA., 6.3 v. 4 a., c.t., 6.3 v. 4 a., c.t., 5 v. 3 a., suitable Williamson Amplifier, etc.	49/9

TOP SHROUDED DROP-THROUGH TYPE

260-0-260 v. 70 mA., 6.3 v. 2 a., 5 v. 2 a.	16/9
350-0-350 v. 80 mA., 6.3 v. 2 a., 5 v. 2 a.	18/9
250-0-250 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a	22/9
300-0-300 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	23/9
350-0-350 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	23/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	29/9

ELIMINATOR TRANSFORMERS
Primaries 200-250 v. 50 c/s.

120 v. 40 mA., 4-0-5 v. 1 a.	14/9
90 v. 15 mA., 6-0-6 v. 250 mA.	9/11

FILAMENT TRANSFORMERS
Primaries 200-250 v. 50 c/s.

6.3 v. 1.5 a. ..	5/9	6.3 v. 3 a. ..	8/11
6.3 v. 2 a.	7/6	6.3 v. 6 a. ..	17/6
0-4-6.3 v. 2 a.	7/9	12 v. 3 a. or 12 v. 1 a.	7/9
		25 v. 1.5 a.	17/6

CHARGER TRANSFORMERS
All with 200-230-250 v. 50 c/s. Primaries: 0-9-15 v. 1½ a., 11/9; 0-9-15 v. 3 a., 16/9; 0-3.5-9-17 v. 3 a., 17/9; 0-9-15 v. 5 a., 19/9; 0-9-15 v. 6 a., 23/9.

OUTPUT TRANSFORMERS

Midget Battery Pentode 66:1 for 3S4 etc.	3/6
Small Pentode 5,000Ω to 3Ω	3/9
Standard Pentode, 5,000Ω to 3Ω	4/9
Standard Pentode, 8,000Ω to 3Ω	4/9
Push-pull 8 watts 6V6 to 5 ohms	8/9
Push-pull 10-12 watts 6V6 to 3Ω or 15Ω	15/9
Push-pull 10-12 watts to match 6V6 to 3-5-8 or 15Ω	16/9
Push-pull EL84 to 3 or 15 ohms	16/9
Push-pull 15-18 watts, sectionally wound, 6L6, KT66, etc., to 3 or 15 ohms	21/9
Push-pull 20 watt high-quality sectionally wound, 6L6, KT66, etc., to 3 or 15Ω	47/9

SMOOTHING CHOKES

250 mA., 5 H., 100 ohms	11/9
150 mA., 7-10 H., 250 ohms	11/9
100 mA., 10 H., 200 ohms	8/9
80 mA., 10 H., 350 ohms	5/6
60 mA., 10 H., 400 ohms	4/11
1 amp. 0.5 ohm. L.T. type	6/6

R.S.C. A10 ULTRA LINEAR 30 WATT AMPLIFIER



NEW 1958 DESIGN, HIGH FIDELITY PUSH-PULL UNIT EMPLOYING SIX VALVES. EF86, EF86, ECC83, 807, 807, GZ34. Tone Control Pre-amp stages are incorporated. Sensitivity is extremely high. Only 12 millivolts minimum input is required for full output. **THIS ENSURES THE SUITABILITY OF ANY TYPE OR MAKE OF MICROPHONE OR PICK-UP.** Separate Bass and Treble controls give both "lift" and "cut" with ample tone correction for long playing records. An extra input with associated vol. control is provided so that two separate inputs such as "mike" and gram., etc., etc., can be simultaneously applied for mixing purposes. **AN OUTPUT SOCKET WITH PLUG IS INCLUDED FOR SUPPLY OF 300 v. 20 mA. and 6.3 v. 1.5 a. FOR A RADIO FEEDER UNIT.** Price in kit form with easy-to-follow wiring diagrams. Cover as illustrated 18/9 extra. Only **£10/19/6** carr. 10/-. Or Factory built with 12 months' guarantee **£13/13/-.** **TERMS ON ASSEMBLED UNITS. DEPOSIT 36/-** and 9 monthly payments of 31/-.

Type 807 output valves are used with High Quality Sectionally wound output transformer specially designed for Ultra Linear operation. Negative feedback of 20 D.B. in main loop. **CERTIFIED PERFORMANCE FIGURES ARE EQUAL TO MOST EXPENSIVE UNITS AVAILABLE.** Frequency response ± 3 D.B., 30-20,000 c/cs., Tone Controls ± 12 D.B. at 50 c/cs., + 12 D.B. to − 6 D.B. at 12,000 c/cs., Hum and noise 70 D.B. down. Good quality reliable components used. Chassis finish blue hammer. Overall size 12 × 9 × 9in. approx. Power consumption 150 watts. For A.C. mains 200-230-250 v. 50 c/cs. Outputs for 3 and 15 ohm speakers. **EQUALLY SUITABLE FOR THE CONNOISSEUR OR FOR LARGE HALLS, CLUBS, or OUTSIDE FUNCTIONS. IDEAL FOR USE WITH MUSICAL INSTRUMENTS SUCH AS STRING BASS, ELECTRONIC ORGAN, GUITAR, etc. FOR DANCE BANDS, GARRISON THEATRES, etc., etc. We can supply Microphones, Speakers, etc., at keen cash prices or on terms with amplifiers.**

EXPORT ENQUIRIES INVITED

LT/45 HIGH QUALITY TAPE DECK AMPLIFIER



COMPLETE with POWER PACK and OSC. STAGE. Suitable for Collaro, Lane, Truvox, Aspden, Brennell, etc., etc. State make of Deck when ordering. Chassis size 12-7-3in. Overall size 12-7-6¼in. For 200-250 v. 50 c/cs. A.C. mains. Output for standard 2-3 ohm speaker. Only 15 millivolts input required for full recording. Only 2 millivolts minimum output required from recording head. Magic Eye recording level indicator. Provision for feeding P.A. amplifier. Negative feed-back equalisation. Linear frequency response ± 3 D.B. 50-11,000 c/cs. Facilities for recordings at 15in. 7½in. or 3¾in. per second. Automatic equalisation at the turn of a knob. When switching from record to playback position automatic demagnetisation of heads is assured. Separate gain and output controls. Valves: type ECC83 ECC83, EL84, EZ80 EM34. Output 4 watts **12 GNS.** Carr. 7/6 Ready for use

Unit supplied with maker's 12 months' guarantee. We know of no other make which represents the same exceptional value. Leaflet 6d. Special Offer Collaro Deck, LT45, 6½in. speaker and Studio "Mike" **29 gns.** Carr. 10/-.

COLLARO JUNIOR 4 SPEED RECORD PLAYER with separate pick-up having dual point sapphire stylus. Brand new, cartoned. For 200-250 v. A.C. mains only **£4/12/6.** Carr. 3/6.

STAAR GALAXY 4-Speed Auto-changer. Brand New. **9 GNS.** Carr. 4/6.

LG3 MINIATURE 3 WATT GRAM. AMPLIFIER

For 200-250 v. 50 c.p.s. A.C. Mains. Overall size only 6½ × 4½ × 3½in. Fitted vol. and Tone Control with mains switch. Designed for use with any kind of single player or record changing unit. Output for 2-3 ohms speaker. Guaranteed 12 months. Only **55/9.**

R.S.C. A5 4-5 WATT HIGH GAIN AMPLIFIER

A highly sensitive 4-valve quality amplifier for the home, small club, etc. Only 50 millivolts input is required for full output so that it is suitable for use with the latest high-fidelity pick-up heads in addition to all other types of pick-ups and practically all mikes. Separate Bass and Treble controls are provided. These give full long playing record equalisation. Hum level is negligible being 71 D.B. down. 15 D.B. of negative feedback is used. H.T. of 300 v. 26 mA. and L.T. of 6.3 v. 1.5 a. is available for the supply of a Radio Feeder Unit or Tape Deck pre-amplifier. For A.C. mains input of 200-230-250 v. 50 c/s. Output for 2-3 ohm speaker. Chassis is not alive. Kit is complete in every detail and includes fully punched chassis (with baseplate) with the blue hammer finish, and point-to-point wiring diagrams and instructions. Exceptional value at only **£4/15/-**, or assembled ready for use **25/-** extra, plus 3/6 carriage. Or Deposit **22/-** and five monthly payments of **22/-** for assembled unit.

R.S.C. A7 3-4 WATT QUALITY AMPLIFIER

A highly sensitive 4-valve amplifier using negative feedback and having an excellent frequency response. Pre-amplifier and Tone Control stages are incorporated with separate Bass and Treble controls giving full tone compensation for long playing records. Suitable for any kind of pick-up including latest high fidelity types. H.T. of 250 v. 20 mA and L.T. 6.3 v 1 a. available for supply of Radio Feeder Unit, etc. ONLY 40 millivolts input required for full output. Fully isolated chassis with baseplate. For A.C. mains 200-250 v. 50 cycles. Output for 2-3 ohm speaker. Complete kit of parts with point-to-point wiring diagrams and instructions. Only **£3/15/-**, carr. 3/6 or factory built **22/6** extra.

COLLARO RC457 4 SPEED AUTO-CHANGER. With studio pick-up with turnover head. BRAND NEW. Cartoned, latest model. For 200-250 v. 50 c.p.s. A.C. mains. Very limited number at only **£8/19/6.** Carr. 5/6.

COLLARO RC54 3 SPEED AUTO-CHANGER

As above unit but for normal 3-speed requirements. Brand new cartoned but for 110 v. 50 c.p.s. A.C. mains. So that the unit can be operated from normal 200-250 v. A.C. mains we are supplying free with every changer a suitable auto-transformer with input and output voltages clearly marked. Limited number only. **7 gns.** Carr 5/6.

PORTABLE CABINETS. Exceptionally attractive design. Finished in 2 tone rexine. Provision for speaker and amplifier. Inside dimensions 17¾ × 12¾in. **69/6** Depth 7in. plus lid 1¼in. Carriage 5/-.

SPECIAL OFFER. Above cabinet LG3 Amplifier 6½in. spkr and Collaro Junior **10 GNS.** or with Staar Galaxy 4-Speed Mixer Changer, **14 GNS.** Carr. 8/6.

LINEAR L45 MINIATURE 4/5 W. QUALITY AMPLIFIER. Suitable for use with Garrard, B.S.R. or any other record playing unit and most microphones. Total negative feedback 12 DB. Separate Bass and Treble controls. For A.C. mains input of 200-250 v. 50 c.p.s. Output for 2/3 ohm speaker. Three miniature Mullard valves used. Size only 6 × 5 × 5¼in. high. Chassis fully isolated from mains. Guaranteed 12 months. Only **£5/19/6.** Or Deposit **22/-** and five monthly payments of **22/-.** Send S.A.E. for leaflet.

PLESSEY DUAL CONCENTRIC 12in. P.M. SPEAKERS

(15 ohms), consisting of a high quality 12in. speaker of orthodox design supporting a small elliptical speaker ready wired with choke and condensers to act as tweeter. This high fidelity unit is highly recommended for use with our A11 or any similar amplifier. Rating is 10 watts. Gauss 12,000 lines. Price only **£5/17/6.** Or Deposit **13/-** and nine monthly payments of **13/-.**

A11 ULTRA LINEAR 12-14 WATT AMPLIFIER

NEW 1958 DESIGN HIGH-FIDELITY PUSH-PULL AMPLIFIER WITH "BUILT-IN" TONE CONTROL PRE-AMP. STAGES

Two input sockets with associated controls allow mixing of "mike" and gram. as in A10. High sensitivity. Includes 5 valves, ECC83, ECC83 EL84, EC84, 5Y3. High Quality sectionally wound output transformer specially designed for Ultra Linear operation, and reliable small condensers of current manufacture. **INDIVIDUAL CONTROLS FOR BASS AND TREBLE** "Lift" and "Cut" Frequency response ±3 DB 30-30,000 c/cs. Six negative feedback loops. Hum level 60 DB down **ONLY 23 millivolts INPUT** required for **FULL OUTPUT.** Suitable for use with all makes and types of pick-ups and microphones. Comparable with the very best designs. For **STANDARD or LONG PLAYING RECORDS.** For **MUSICAL INSTRUMENTS** such as **STRING BASS, GUITARS,** etc. **OUTPUT SOCKET** with plug provides 300 v. 30 m.a. and 6.3 v. 1.5 a. For supply of a **RADIO FEEDER UNIT.** Size approx. 12-9-7in. For A.C. mains 200-230-250 v. 50 c/cs. Output for 3 and 15 ohms speakers. Kit is complete to last nut. Chassis is fully punched. Full instructions and point-to-point wiring diagrams supplied. Despite improved performance due to use of latest miniature valves price remains as previous model but extra input now standard.

Only **8 GNS.** or factory built **45/-** extra. Carr. 10/-. If required louvred metal cover with 2 carrying handles can be supplied for **18/9. TERMS ON ASSEMBLED UNITS. DEPOSIT 25/6** and nine monthly payments of **25/6.**

LINEAR "DIATONIC" 10-WATT HIGH FIDELITY AMPLIFIER. Incorporating pre-amp. For A.C. mains input 200-230-250 v. 50 c.p.s. A compact attractively finished unit with two separately controlled inputs, and outputs for 3 and 15 ohms speakers. Separate Bass and Treble controls. Five latest type miniature Mullard valves. Only **12 Gns.** Send S.A.E. for leaflet and credit terms.

W.B. "STENTORIAN" HIGH FIDELITY P.M. SPEAKERS.

HF/1012, 10 watts, 15 ohm (or 3 ohm) speech coil. Where a really good quality speaker at a low price is required, we highly recommend this unit with an amazing performance. **24/10/9.** Please state whether 3 ohm or 15 ohm required.

P.M. SPEAKERS. 2-3 ohm 5in. Goodmans **17/9.** 7 × 4in. Elliptical **19/9.** 6½in. Rola, **19/9.** 8in. Rola, **19/9.** 8in Goodmans **21/9.** 10in. R.A., **28/9.** 10-6in. Elliptical **28/9.** 12in. Plessey **29/11.** 12in. Plessey 3 ohms, 10 watts, 12,000 lines, **59/6.**

SUPERHET RADIO FEEDER UNIT

Design of a high quality Radio Tuner Unit (specially suitable for use with any of our Amplifiers). A Triode Heptode F/changer is used. Pentode I.F. and double Diode Second Detector, delayed A.V.C. is arranged so that A.V.C. distortion is avoided. The W. Ch., Sw., incorporates Gram. position. Controls are Tuning, W. Ch., and Vol. Output will load most Amplifiers requiring 500 mV. input depending on Ac. location. Only 250 v 15 mA. H.T. and L.T. of 6.3 v 1 amp required from amplifier. Size of unit approx. 9-6-7in. high. Send S.A.E. for illustrated leaflet. Total building cost is **24/15/-.** Point-to-point wiring diagrams and instructions, **2/6.**

RECORDING TAPE 1,200ft. Reels Puretone Medium Coercitivity **15/9.**

Radio Supply Co. (LEEDS) LTD.

32 THE CALLS. — LEEDS, 2.

Terms: C.W.O. or C.O.D. No C.O.D. under £1. Postage 1/9 extra on all orders under £2, 2/9 extra under £5 unless carriage charge stated. Full Price List 6d. Trade List 5d. Open to Callers: 9 a.m. to 5.30. p.m. Saturday until 1 p.m. S.A.E. please with all enquiries.

BAND 3 T.V. CONVERTERS
BY RETURN OF POST

ALL with 12 months' guarantee (B.V.A. valves, 3 months' guarantee). All 3/- each extra, postage. All 2/- C.O.D. For all I.T.A. stations and all sets except Philips. Pattern rejector fitted. All fully wired, aligned and ready for use. All with power pack, knobs, aerial switching, metal rectifier and 2 valves ECC81. Direct switching from B.B.C. to I.T.A. Fine tuning on front. No drift. State B.B.C.



£4.7.6

With metal cabinet as illustrated. Stove enamel grey hammer finish.

Or Walnut cabinet, £4/17/6.

Or chassis, i.e., less cabinet, £3/17/6 (p. & p. 2/6).
Variable attenuator, 7/6 (p. & p. 1/-).
Aerial Splitter, 8/- (p. & p. 1/-).
Band III Aerials, mast mounting: Carr. Paid 3-element, 27/-; 5-element, 35/-; 9-element, 55/-.
Belling-Lee 6-element Band 3 aerial, 37/6.
Low-loss Co-axial, 8d. yard.
Our aerials are suitable for loft mounting.
External Crossover unit 7/6 (post 1/6).
POST ORDERS TO CAMBERLEY PLEASE.

GLADSTONE RADIO
82B, HIGH ST., CAMBERLEY, SURREY
AND
3, CHURCH RD., REDFIELD, BRISTOL

CONDENSERS

AR 88 MULTI BLOCK CONDENSER (oil filled). 25/- each. Filter Pack C96, 97, 98.

AMERICAN (BATH TUB) CONDENSERS, 2 mfd., 400 v., 2/6 each. 1 mfd., 600 v., 2/- each. 2×0.1 mfd., 600 v., 1/6 each

RECEIVER BC 624G (part of SCR 522). This well-known receiver covers 100 to 156 Mc., the "C" is the latest type which incorporates several mods. over the earlier models, noise limiter. AVC squelch circuit and extra audio stage. The power requirements are 300 volts 70 ma., HT, 12 volts 3 amp. LT. New and complete with 11 valves £2/2/6 each. P.P. 3/6.

RECEIVER CW 46048 (part of RU 19). Valves, 3 type 78, 2 type 77, 1 type 1624, one coil set with each, freq., 1330-2040 Kc. (extra coils 5/-). 19/6 each. P.P. 3/-

INSTRUMENT TERMINALS (G.P.O. type LT). 6 BA fixing, 10/- doz.

POWER FACTOR CONDENSERS. 55+55 mfd., 300 volts AC wkg., 30/- each. P.P. 5/-.
2mfd., 5 kv. wkg., tested 10 kv., size 12×6×6in., 17/6 each. P.P. 4/-.
0.25 mfd., 9 kv. wkg. (oil filled), size 12×6×4in 12/6 each. P.P. 3/6.

MIDGET CARBON POTS. Preset 50 K 1/10 watt, 1/6 each. 15/- doz.

DINGHY AERIALS. Extending to 6ft. complete with small beacon transmitter, 9/6 each. P.P. 1/6.

U.S.A. TRANSMITTING VALVES. VT 158 (by Eimac) with cooling housing and 24 v. Blower unit, £4/10/-.

STATTMETERS (K.D.G.) 7in. scale 0-150 kilogrammes. Brand new, £8/10/- each.

AIR-SPACED CONDENSERS. 450 pf. ±1%, 5/6 each. P.P. 1/-.

C CORE TRANSFORMERS. 200/250 v. pr., 350-0-350 tapped 250-0-250 v., sec. 180 mA. 6.3 v., 0.5 amp. and 5 v. 3 amp., 25/6 each. P.P. 3/3. 230 v. pri., 6.3 v. at 1.7 amp. and 6.3 v. at 0.3 amp., 10/6 each. P.P. 1/6.

TRANSMITTER COILS. 26 turns of 16-gauge silver-plated copper wire, on ceramic former, 8/- each. P.P 1/6.

CHOKES. 15 H., 300 mA. 110 ohms, 12/6 each. P.P. 2/6. 9 H., 100 mA. 6/- each. P.P. 1/9. 1 H., 45 mA., 3/6 each. P.P. 1/-.

GARDENERS TRANSFORMERS. 190/250 v. pri., 450-0-450 v. 200 mA., 6.3 v c.t., at 2 amp., and 5 v. c.t. at 3 amp. 32/6 each. P.P. 3/3.

POLARIZED RELAYS. 320 AN (G.P.O. type), 10/- each. P.P. 2/-.

MORSE KEYS (small size). 3/6 each. P.P 1/-

MAGSLIPS. A.P. 6550, 2in. and AP. 6549, 2in., 22/6. P.P. 2/6

TUBULAR BAKELITE CONDENSERS (Jelly filled). 0.1μF 4 kV. wkg. 4/6 each. 0.1μF. 2.5 kV. wkg. 3/6 each 0.01μF. 5 kV. wkg 0.05 3.5 kV.wkg., and 0.002μF. 5 kV. wkg. 2/6 each. 0.1μF. 1,200 v. wkg., 0·01μF. 4 kV. wkg. 0.02μF. 3 kV wkg., 0.05μF. 2 kV. wkg., 0.001μF 5 kV. wkg and 0.25 μF. 800 v. wkg. and 0.001μF. 2 kV. wkg. All at 2/- each.

TERMS C.W.O. S.A.E. for all enquiries.

W. MILLS
3B TRULOCK ROAD, TOTTENHAM, N.17
Phone: Tottenham 9213 & 9330

THE
BRITISH NATIONAL RADIO SCHOOL
ESTD. 1940

NOW IN OUR SEVENTEENTH YEAR AND STILL
NO B.N.R.S. STUDENT HAS EVER FAILED
to pass his examination(s) after completing our appropriate study course

A.M.Brit.I.R.E., CITY and GUILDS, and P.M.G. EXAMINATIONS, and now

Another B.N.R.S. "FIRST"

MORSE TUITION. *RECEPTION* with L.P. Records.

"SENDING" monitored by telephone and tape recorder. A complete service.

Our Principal will personally check your "sending" by telephone on his tape recorder and will return to you a morse inker copy of your "sending" with his criticism and advice.

Please write for full details.

PRINCIPAL,
BRITISH NATIONAL RADIO SCHOOL
66 ADDISCOMBE ROAD, CROYDON, SURREY
Tel. ADDiscombe 3341

POLYTHENE
PROTECTIVE CAPS & PLUGS
FOR
STANDARD INTERNAL & EXTERNAL THREADS
OR
SPECIAL MOULDINGS

AMPLEX APPLIANCES (KENT) LTD.
19 DARTMOUTH ROAD, HAYES, BROMLEY, KENT
(RAVensbourne 5531)

All export enquiries to
ANGLO NETHERLAND TECHNICAL EXCHANGE LTD.
3, TOWER HILL, LONDON, E.C.3.

THE TAPE RECORDER SPECIALISTS

STOCKISTS of every well-known make including:

FERROGRAPH, GRUNDIG, SIMON, VORTEXION, ELIZABETHAN, ELON, BAIRD, WYNDSOR, WALTER, SOUND, SONOMAG, GELOSO, PHONOTRIX, PHILIPS, TRUVOX, Etc.

TAPES AND ALL ACCESSORIES

HOME DEMONSTRATIONS IN NORTH LONDON

CREDIT TERMS. NO EXTRA CHARGE.

SHERBOURNE
50 TOPSFIELD PARADE, CROUCH END, N.8.
MOUNTVIEW 1987

RADIO · TELEVISION · HI-FI · ELECTRONICS · RECORDERS

LASKY'S RADIO

AUTO-CHANGERS

See us for your requirements or send for our latest list.

COLLARO 4-SPEED MIXER AUTO-CHANGER

Latest model RC 456 incorporating auto and manual control enabling records to be played singly or automatically. Complete with Studio crystal pick-up and sapphire styli. List £13/17/-. LASKY'S PRICE **£8.19.6**
Post 5/-

SPECIAL OFFER!

COLLARO "JUNIOR" 4-SPEED MOTOR AND PICK-UP

Collaro "Junior" 4-speed motor and pick-up with HGP59 cartridge. **92/6**
Post 5/-.

Motor only, 59/6, post 2/6. Pick-up only, 33/6, post 2/6.

Collaro 4/564 4-speed Single Player with Studio T p.u. crystal cartridge and styli. Automatic stop. LASKY'S PRICE **£7.7.0**
Carr. 5/-

Immediate Delivery from stock of the COLLARO 4-speed Transcription Turntable
4T200/PX. £19/10/0. Carr. 7/6
Less pick-up **£14/18/-.**

BUILD YOURSELF A HIGH GRADE RECORD PLAYER!

We have the biggest selection of Auto-Changers, Single Players, Amplifiers and Cases, and you can make your own Record Player for as low as **£10**

TRANSISTORS AT A REASONABLE PRICE

R.F. P.N.P. Junction type, suitable for medium and low frequency oscillators, frequency changers and I.F. amplifiers 1.5 to 8 Mc/s (double spot—yellow & red) **21/-**

AUDIO P.N.P. Junction type, suitable for high gain and low frequency amplifiers, and for output stages up to 250 milliwatts, (double spot—yellow and green). **10/-**
Post Free.

★ **TESTED AND GUARANTEED EFFICIENT**
★ **HERMETICALLY SEALED and unaffected by temperature variations.**

Full operating data and circuit diagrams for a simple receiver superhet, T.R.F., multi-vibrator, relaxation oscillator, audio amplifier, oscillators, signal tracers, etc., supplied with each Transistor.

MULLARD TRANSISTORS
OC70 or OC71 OC72 OC16
21/- **30/-** **60/-**

BRIMAR TRANSISTORS
TS1 **12/6.** TS2 **12/6.** TS3 **15/-.**
TS4 **27/6.** TP1 or TP2 **40/-.**
TJ1 **15/-.** TJ2 **16/6.** TJ3 **19/6.**

LASKY'S TRANSISTOR SUPERHET TUNER FOR HOME CONSTRUCTION ON PRINTED CIRCUIT

Uses three R.F. Transistors and one Germanium Diode, three I.F. transformers. Ferrite rod aerial. Operates on one 6 v. battery and one 1.5 v. cell. Printed Circuit, 3¼in. × 3¼in.

CAN BE BUILT FOR. Post 3/6. **£5.12.9**
Full details and illustrations post free on request.
Demonstrations at both addresses.



NOTE:—This Tuner in conjunction with our Transistor Amplifier (see below) makes an excellent Transistorised radio. Cabinets available.

LASKY'S TRANSISTOR AMPLIFIER KIT

(200 milliwatts) For construction on a Printed Circuit



All components available separately

Size: 3¼in. × 3¼in. Height can be under 1in. Uses our new hermetically sealed Transistors and operates from 6-volt battery. Output impedance 3 ohms.

FULL DETAILS, CIRCUIT DIAGRAM AND SHOPPING LIST 1/- post free.

COMPLETE KIT including 4 Transistors, all brand new components, latest T.C.C. miniature condensers, printed circuit and full instructions, **79/6** Post 3/6.

DEMONSTRATIONS AT EITHER OF OUR ADDRESSES

SUB-MIN. TRANSISTOR TRANSFORMERS 45-1 ratio each. **4/6** Post 1/-

ALL TRANSISTOR COMPONENTS. Trans., midget, min. and sub-min. Coils, Ferrite Rods, sub-min. Condensers, etc.

PICK-UP BARGAIN
"RONETTE" Lightweight Crystal Pick-up with 2 cartridges.
LASKY'S PRICE **45/-**
Post 2/6

CARTRIDGES
ACOS HGP37 p.u. Cartridges. l.p. and standard, complete with styli. List 41/7.
LASKY'S PRICE **18/-**
Post 1/-



Telefon "Companion"

3-TRANSISTOR POCKET RADIO. T.R.F. circuit covering medium and long waves, with balanced armature output. Ferrite aerial. Note small size: 4¼ × 3 × 1in. You can build this novel transistorised pocket receiver for only **89/6** Full instructions and price list, 6d. post free. All components available separately.

SINGLE PLAYER BARGAIN

B.S.R. TU9, 4-speed motor and latest B.S.R. "ful-fi" pick-up. **94/-**
Post 3/6.



LASKY'S 4-WATT PORTABLE GRAM AMPLIFIER

Will suit any type of crystal or magnetic pick-up. Uses 3 valves: EL84 output, L63 and EZ80 rect. Speaker and controls are completely separate and can be mounted as shown or on anywhere in cabinet where most suitable.

COMPLETE with 3 valves and knobs, less Speaker. Carr. 5/-. **79/6**

7in. × 4in. Elliptical Speaker, if required, **19/6** extra.

Details and circuit diagram post free on request.



LASKY'S PORTABLE GRAM AMPLIFIER KIT

2 watts. Note small dimensions, approx. 6¾in. × 3¾in. max., height 5in. Uses EL84 output and 6X4 rectifier, double-wound transformer, tone control, output transformer, etc. Built on a T.C.C. PRINTED CIRCUIT which greatly simplifies construction. Owing to the great demand we have been able to reduce our price.

COMPLETE KIT, including valves, printed circuit, full instructions, less Speaker. Carr. 2/6 **49/6**

7in. × 4in. Elliptical Speaker, if required, **19/6** extra.

★ **H.P. TERMS and CREDIT SALES available on certain items.**

MORE MONEY-SAVING LASKY BARGAINS ON NEXT PAGE

LASKY'S RADIO

SAVE POUNDS! ORDER BY POST IF YOU CANNOT CALL

SCOOP! — PORTABLE TAPE RECORDER AMPLIFIERS



Mains 200/250 v. A.C. 6 watts output. 4 valves: EZ41 rect., EL41 output, EF40 and ECC81. Tone, volume and record/play back controls. Neon level indicator. Microphone and gram inputs. Can be used as a straight amplifier. Circuit diagram supplied.

LASKY'S PRICE £6 . 19 . 6

Complete with valves. Post & Pkg. 5/-.

Brand new and unused. Overall size: 14in. long, 4¼in. wide, 4¼in. high. (Controls are mounted through chassis so cannot be seen in illustration).

For use with low impedance Tape Heads.

Combined record/play/erase Head available separately, **35/-**. If purchased with Amplifier, **25/-**.



LASKY'S F.M. TUNER

PRINTED CIRCUIT VERSION OF G.E.C. 912 "F.M. PLUS" TUNER FOR HOME CONSTRUCTION

Note these star features:—

★ HIGH SENSITIVITY.
★ ALL BRAND NEW T.C.C. CONDENSERS.
★ AERIAL COIL AND R.F. COUPLING COIL PRINTED ON CIRCUIT.
★ 5 VALVES AND 2 GERMANIUM DIODES.

By the use of a printed circuit the I.F. and R.F. amplifiers are extremely stable at maximum gain and results are consistent on all tuners.

Valve line-up:—
R.F. Amplifier, Z719 or EF80.
Mixer and Osc. B719 or ECC85.
1st. I.F. amp., W719 or EF85.
2nd I.F. amp., W719 or EF85.
2 Germanium Diodes GEX.34.
Driver Limiter, Z719 or EF80.

CAN BE BUILT FOR £7 . 19 . 6 (including valves)
Post and Pkg. 2/6

G.E.C. F.M. Tuner Book plus our full data and shopping list **2/6** post free. All parts available separately.
ALIGNMENT SERVICE available.

JASON F.M. TUNER

Special Parcel containing data book, chassis, front panel, dial, drive, tuning condenser, full sets of coils, I.F.s, ratio detector, etc. **68/9**
Post 2/6

DATA BOOK with price list **2/-**. This tuner uses 4-6AM6 and 2 crystals and can be built for **£6/15/-**, plus 3/6 post.

JASON "ARGONAUT"

Super-sensitive Tuner for F.M. and medium waves. Complete parcel with power supplies. **£13 . 19 . 6**
Post, 3/6
DATA BOOK **2/-** post free. Chassis Assembly **57/9** post 2/6. I.F. and Coil Set **78/-** post 1/6.
All components available separately.

OTHER F.M. TUNERS

TSL **£17/10/-**. DULCI **£17/10/-**. Also Quad, Leak, RCA, Rogers, Pamphonic, etc.
DULCI H4/T 4-wave AM/FM Tuner, **£20/17/-**.

BUILD THIS 4-VALVE S/HET PORTABLE FOR ONLY 7 GNS.

The **PRINTED CIRCUIT** supplied makes construction amazingly easy and accurate. You can build this fine 4-valve superhet portable in an hour or so, and performance equals ready-built sets costing pounds more!

FOR ONLY £7/7/- plus 3/6 carr. and pkg., you can build this Portable using all brand new components and valves, only batteries extra. Printed circuit, circuit diagram, and full instructions supplied.

If you would first like to study the layout of this portable send 1/6 for Circuit Diagram, illustrations and full data.

FOR ONLY £9/9/- plus 3/6 carr. and pkg., you can build this job as a mains and battery Portable using our specially designed build-it-yourself Power Unit for 200-250 v. A.C.
Demonstrations at both addresses.

6-12 volt MINIATURE MOTORS

Complete with gearbox. Overall size, 2¼" long x1¼" x 1". Works with any voltage from 6 to 12. Ideal for models, remote control etc. Original cost over **£2.** **LASKY'S PRICE. 12/6**
Post 1/6.

HI-FI SPECIALISTS!

Selective Demonstrations of all the latest and best Hi-Fi equipment are given at our Tottenham Court Road showrooms. See our large and comprehensive stocks.

PICK - UPS. Garrard, Leak, Connoisseur, Ortophone, B/J., etc., etc.
SPEAKERS. Wharfedale, Goodmans, G.E.C., Lowther, Lorenz, etc., etc.
TRANSCRIPTION TURNTABLES. 3 and 4 speed Garrard, Connoisseur, Collaro, Lenco, etc.
AMPLIFIERS. Quad, Rogers, Leak, RCA, Pamphonic Unitelex, W.B., etc.
CABINETS. Wide selection of Cabinets and Speaker Enclosures to house your speakers and hi-fi equipment.

The New AVO MULTIMINOR. 19 ranges A.C. and D.C. 10,000 ohms per volt D.C. 1,000 ohms per volt A.C. Pocket size: 5¼ × 3¼ × 1¾in. Complete with leads and clip **£9/10/-**. Post 3/6.

DULCI HI-FI CHASSIS, TUNERS and AMPLIFIERS

New designs including:—

Mdl. H.3. AM/FM Radiogram Chassis, 3 wave bands including V.H.F. **£20/17/-**
Mdl. H.4. AM/FM Radiogram Chassis, 4 wavebands, including V.H.F. **£24/6/6**
Mdl. H.4.PP. AM/FM Radiogram chassis, 4 waves including V.H.F. 6-8 watts o.p. push-pull, ultra linear. **£29/3/10**
Mdl. H.11. Combined and self-powered AM/FM Tuner, Control Unit and Audio pre-amplifier. **£29/3/10**
Mdl. DPA.10. 10-14 watt Ultra Linear Power Amplifier..... **£12/12/-**
Mdl. DP.4. 4-watt High Fidelity Amplifier **£7/10/-**

MULLARD 510 AMPLIFIER KIT WITH T.C.C. PRINTED CIRCUIT



All specified components and your choice of transformers and chokes by Partridge, Haddon, W/B, Ellison or Gilson.

COMPLETE KIT of parts and printed circuit as low as **£9.9.0** Details on request.

Book 3/6 post free.

Printed circuit separately 22/6.

Also available built ready for use. Price according to transformers used.

All components available separately. Price List on request.

NEW BRENELL MARK IV DECK

Now available! Entirely redesigned to permit of conversion to stereophonic sound with 4 heads for dual channel operation when required.

DECK only ..... **22 gns.**
DECK WITH PRE-AMP. UNIT and magic eye indicator ready for use with any standard amplifier. **38½ gns.**
COMPLETE MARK IV TAPE RECORDER, as illustrated. Counter 30/- extra ..... **53 gns.**

Come and inspect the new Brenell Mark IV and have a demonstration. Full details post free on request.

TAPE DECKS

All types in stock including the latest model COLLARO "TAPE TRANSCRIPTOR," Mk. III, fitted with digital counter. **£22.**
Carr. 21/- extra.

COLLARO TAPE PRE-AMPLIFIER, fitted and wired. **£21**
LANE DECK **£18/10/-**
WEARITE DECKS **£35 & £40**
Carr. extra.

TAPE RECORDERS

Leading makes—Grundig, Elizabethan, Truvox, Sound, Vortexion.

SPECIAL PURCHASE RECORDING TAPE

Famous manufacturer's surplus P.V.C. base, 1,200ft. on 7in. plastic spool, post 1/-. **21/-**

ALL LEADING MAKES OF TAPE & SPOOLS IN STOCK.

COLLARO TAPE DECK MOTORS, set of 3, clockwise, anti-clock capstan. List **£5/15/-**. **LASKY'S PRICE 95/-**
Post 5/-

MORE MONEY-SAVING LASKY BARGAINS ON NEXT PAGE

EVERYTHING FOR HOME CONSTRUCTOR & SERVICEMAN

LASKY'S RADIO

TRUVOX 'SENIOR' SPEAKER DRIVING UNIT (pressure type) Power handling cap. 15 watts peak. With 12ft. cinema horn reproduces down to 17 c.p.s.
List £7/15/-. Carr. 5/-. **Lasky's Price 59/6**

MOVING COIL P.M. SPEAKERS

2½in.	17/6.	3in. and 3½in.	19/6
5in.	19/6.	6½in. 17/6. 8in.	21/-
10in.	29/6.	12in.	29/6
6½in. with transformer			21/-
7×4in. Elliptical			19/6
10×7in. Elliptical			32/6

SPECIAL OFFER
DUAL CONCENTRIC SPEAKERS (15in.)
Famous make. High Fidelity, 25 watts, 15 ohms imp., full freq. range 20 c.p.s. to 17,000 c.p.s., resonance 20 c.p.s. Complete with crossover unit. List £27/4/6.
LASKY'S PRICE **£15.19.6**
Carr. 7/6 plus 30/- for wood packing case (returnable).

6-VALVE RADIOGRAM CHASSIS COMPLETE WITH VALVES
Famous Manufacturer's Surplus. 6-valve 3-wave Superhet. 13-50 m. short. 200-550 m. medium. 1,000-2,000 m. long.
LASKY'S PRICE **£10/19/6**
Carriage and packing 7/6 extra

5-VALVE RADIOGRAM CHASSIS COMPLETE WITH VALVES
3-wave superhet, 16-50 m., 200-550 m., 1,000-2,000 m. Brand new Mullard and Mazda valves—6C9, 6F15, 6LD20, N108, U107. Overall diam. 13in. long, 6in. deep, 7in. high approx. for A.C. mains 200/250 v.
LASKY'S PRICE **7 GNS.**
complete with all valves
Carr. and Pkg. 7/6 extra.
Price without valves £5/4/-

HI-FI ELECTROSTATIC SPEAKERS ("TWEETERS")
Easy to fit to any radio, TV receiver or amplifier. Full data and circuit diagram supplied.
LSH75. For outputs up to 6 watts, 8/-.
LSH518. For outputs of 10-12 watts, 12/6.
LSH100. For outputs up to 20 watts, 14/-.
Post free.

LPH65. MOVING COIL TWEETER. Imp. 5.5 ohms, freq. range 2,000-3,200 0 c/s. For outputs up to 6 watts. 2½in. diameter. All post free. 39/6.

SPEAKER COVERINGS. Large stocks of Tygan and "Someweave" Speaker Coverings. Any size piece cut. Send for samples and prices.

ALL-DRY POWER UNITS
By Decca. Suitable for any battery radio using 1R5, 1T4, etc., 67½ volts H.T., 1½ volts L.T.
LASKY'S PRICE **29/6**
Post 3/6

INEXPENSIVE EASILY BUILT RADIO SETS
Lasky's Radio Constructors' Parcels contain everything to build up-to-date and very efficient sets at low cost.

PARCEL No. 1
Contains everything to build a 4-valve 3-wave superhet for 200/250 A.C. mains. Uses 6K8 6K7, 6Q7, 6V6 valves. Attractive wood cabinet, walnut veneer, or plastic cabinet as illustrated. Size 12×6½×5½in. deep. **CAN BE BUILT FOR** Carr. and packing 2/6. **£7/19/6**

PARCEL No. 2
Contains everything to build a T.R.F. 3-valve set for 200/250 A.C. mains, medium and long waves. Uses 6K7G, 6J7, 6V6 and metal rectifiers. Neat plastic cabinet, walnut or ivory flash, or wood cabinet. Size 12×6½×5½in. deep.
CAN BE BUILT FOR Carriage and packing 2/6. **£5/10/0**
INSTRUCTION BOOK for either above sets 1/- post free.
CABINETS ONLY, plastic or wood 17/6
Post 2/6.
All components available separately.

MAKERS' SURPLUS TV COMPONENT BARGAINS

WIDE ANGLE 28 mm.

Line E.H.T. trans., ferrox-cube core. 9-16kV.	25/-
Scanning Coils, low imp. line and frame	25/-
Ferrox-cube cored Scanning Coils and Line Output Trans., 10-15 kV., EY51 winding. Line Trans. Complete with circuit diagram, the pair	50/-
Frame Output Transformer	6/6
Scanning Coils, low imp. line and frame	17/6
Frame or line blocking osc. transformer	4/6
P.M. Focus Magnets Ferrox-dure	19/6
P.M. Focus Magnets. Iron Cored	19/6
Duomag Focalisers	22/6
300 m/a. Smoothing Chokes	15/-
Electromagnetic focus coil with combined scan coils	25/-

STANDARD 36 mm.

Line Output Transformers 6.9 kV. E.H.T. and 6.3 v. winding. Ferrox-cube	19/6
Scanning coils. Low imp. line and frame	12/6
Ditto by Igranic	14/6
Frame or line blocking oscillator transformer	4/6
Frame output transformer	7/6
Focus Magnets Without Vernier	12/6
With Vernier	17/6
Focus Coils, Electro magnetic	12/6
200 m/a. Smoothing Chokes	10/6

***H.P. TERMS & CREDIT SALES available on certain goods**

BAND III CONVERTERS TURRET TUNERS AERIALS, Co-Ax. CABLE
Very large stocks. We have what you require.

CO-AX. CABLE
80 ohms semi-airspaced, finest quality, stranded. Per yard, 9d. Dozen yards 7/6
Post extra.
Any length supplied.

17 in. C.R. TUBES
Rectangular, aluminised or ion trap 0.3 heater. Brand new and unused. **£12/19/6**
Carr. and Insur. 22/6.

LASKY'S NEW MIDGET T.R.F. CONSTRUCTOR PARCEL



CAN BE BUILT FOR ONLY 99/6
Post & Pkg. 5/-
Handsome contemporary design case, overall size 8½in. wide, 4½in. deep, 5in. high. 2 latest double-purpose valves EBF9 and ECL80, contact cooled rectifier. For A.C. mains 200-250 v. Med. and long wave, 5in. P.M. speaker. Plastic cabinet in cream, pastel green, pink, blue. FULL DATA, instructions, circuit diagram and shopping list, 1/6 post free.
All components available separately.
CABINET only, as illus., 12/6 plus 4/6 post and pkg.

CHASSIS
We have the largest stocks of chassis, A.M. and AM/FM.
A.M. chassis, l, m, s, from **7 Gns.**
AM/FM chassis from **14 Gns.**

FERRITE RODS
Large selection of Ferrite Rods, all lengths, in stock. Price, per rod, **2/6** to **3/6.**

MAINS TRANSFORMERS
All 200-250 v. 50 c.p.s. primary, finest quality, fully guaranteed.
MBA/3. 350-0-350 v. 80 mA. 6.3 v. 4 a. 5 v. 2 a. Both filaments tapped at 4 volts. **19/6**
MBA/7. 250-0-250 v. 80 mA. 6.3 v. 3 a., 5 v. 2 a. Both filaments tapped at 4 volts. **19/6**
AT/3. Auto trans. 0-10-120, 200-230-240 v. 100 watts **19/6**
M.T./341. Tapped input 250-0-250 120 mA., 6.3 v. 5 amps., fully shrouded **27/6**

FILAMENT TRANSFORMERS
All 200-250 v. 50 c.p.s. primary, finest quality, fully guaranteed.
6.3 v. 1.5 amp. **5/11**
6.3 v. 3 amp. **9/6**
0-30 v. 2 amp. tapped voltages, **19/6**

GERMANIUM CRYSTAL DIODES
GEX.00 **1/6**, GEX.34 **3/6**, WG5 **3/6**, GEX. 54 and OA74 **5/-**, GD3 **3/6**, GD4 **3/6**. CG12E **5/-**.

20,000 VALVES IN STOCK
Here are a few examples of brand new surplus and imported valves:

EB91	7/6	EV41	10/6	EL84	11/6
EB41	7/6	EF80	10/6	ECF80	15/-
EABC80	10/-	EF85	10/6	EZ40	8/6
EAF42	10/-	EF86	14/-	EZ80	8/6
EBC41	10/-	EF89	10/-	PCL82	12/6
ECC85	10/-	6K8	10/6	PCC84	12/6
ECC84	15/-	6V6	8/6	PL82	10/6
ECC83	9/-	6K7	5/6	PL83	11/6
ECC82	9/-	6Q7	10/6	PY80	10/6
ECC81	9/-	6B7	6/6	PY81	10/6
12AT7	8/6	5Z4	9/6	PY82	10/6
12AU7	8/6	DAF96	10/-	PY83	10/6
12AX7	9/6	DL96	10/-	6AT6	7/6
EB89	10/6	DK96	10/-	6AT7	7/6
EFC82	15/-	DF96	10/-	185	7/6
ECH42	11/6	DM70	9/-	384	9/-
ECH81	11/6	EY51	12/6	1T4	9/-
ECL80	10/6	EC84	11/6	1R5	7/6

Also full stocks of B.V.A. Valves and C.R. Tubes at the new lower list prices.
WRITE FOR COMPLETE LIST

SPECIAL RECTIFIER OFFERS

RM.0,	125 v. 30 m/a.	4/11
RM.1,	125 v. 60 m/a.	5/11
RM.2,	125 v. 100 m/a.	6/6
RM.3,	125 v. 120 m/a.	7/6
RM.4,	250 v. 125 m/a.	16/-
RM.5,	250 v. 150 m/a.	21/-

Post extra.
All makes and types in stock. Send to us for your requirements.

BARGAIN OFFER!

POCKET VOLT TEST METERS
Two ranges, D.C. 0-250 v. and 0-25 v. Complete with leads in leather case.
Lasky's Price **12/6**
Post free. Send now to avoid disappointment.

LASKY'S (HARROW ROAD) LTD.

LASKY'S RADIO

42 TOTTENHAM COURT ROAD, W.1.
Nearest Station Goodge Street
MUSeum 2605

370 HARROW ROAD, PADDINGTON, W.9.
(Opposite Paddington Hospital)
LAD 4075 and CUN 1979.

Open all day Saturday. Early closing Thursday (both addresses)

ALL MAIL ORDERS TO HARROW ROAD PLEASE

RADIO TRADERS LTD.

23 WARDOUR ST., LONDON, W.1. (Coventry Street end)

Phone: No. GERrard 3977/8 *Grams: "Radiotrade"*

SPECIAL OFFER OF CURRENT MANUFACTURE ELECTROLYTIC CONDENSERS
8 mfd. 450 v. 2/6 each; 16 mfd. 450 v. 3/-; 32 mfd. 450 v. 4/-; 8 x 8 mfd. 450 v. 3/9; 8 x 16 mfd. 450 v. 4/-; 16 x 16 mfd. 450 v. 4/6; 32 x 32 mfd. 350 v. 5/-; Bias Condensers: 25 mfd. 25 v. 1/6; 50 mfd. 50 v. 1/9. Please note we can offer special discounts for quantities.

W.W. RESISTORS. 5 watt 1/6; 10 watt 2/6; 15 watt 3/-; 20 watt 3/6. We carry stocks of resistors from 2 watt to 150 watt W.W. Your enquiries invited.

HIGH STABILITY RESISTORS. ¼ watt 5% 6d.; ½ watt 5% 9d; 1 watt 5% 1/-. A few values in 1% and 2% still available. ALL ORDERS FOR RESISTORS C.O.D. PLEASE, AS WE CANNOT GUARANTEE TO STOCK ALL VALUES.

ELECTROLYTIC CONDENSERS. Manufacturers' Surplus, in perfect condition. 100 mfd. x 200 mfd. 350 v. surge 5/6 each; 100 mfd. x 100 mfd. 425 v. surge 5/6 each; 150 mfd. 450 v. wkg. 5/6 each.

BIAS CONDENSERS. 3,000 mfd. 6 v. 3/6 each; 2,500 mfd. 3 v. 3/6 each; 1,000 mfd. 12 v. 1/6; 25 mfd. 25 v. 1/3; 50 mfd. 12 v. 1/-.

TRANSISTORS: Junction type Red Spot by well-known manufacturers 10/- each.
TRANSISTOR CONDENSERS: Miniature Electrolytic Capacitors 32 mfd. 3 v., 25 mfd. 25 v., 25 mfd. 6 v., 16 mfd. 12 v., 8 mfd. 6 v., 5 mfd. 12 v., 2.5 mfd. 25 v., 1.6 mfd. 6 v., 1 mfd. 12 v. All these types of condensers are 3/6 each. SPECIAL DISCOUNTS FOR QUANTITIES.

AIR-SPACED TRIMMERS, 5, 10, 15, 20, 25, 50 and 75 of pre-set and spindle types 2/- each.....doz. 21/-

PYE PLUGS AND SOCKETS 1/6 per pair "T" pieced...each 1/9

GROMMETS, 1 grs. assorted grommets, ¼in. to 1in .....gross 8/6

WESTECTORS. WX6, WX12, W4 1/- each.....doz. 9/-

SIGNAL LAMP HOLDERS. Panel mounting, complete with adjusting lampholder 2/- each.....doz. 21/-

BELLING-LEE PLUGS AND SOCKETS, 5 pin 1/9; 7 pin 2/-; 10in. ..... each 2/6

MANUFACTURERS PLEASE NOTE. We hold large stocks of Nitrogol, Visconol and other block-type Condensers, your enquiries are invited.

0-100 amps. 50 c.p.s. 4½in. METERS, £2/10/-; 0-50 amp. Moving Iron 6in. Meters, £3/10/- each. All brand new and boxed.

MIDGET MICA CONDENSERS. .0001, .0002, .0003, .0004, .0005 5/- per dozen.
200 Assorted Moulded Mica Condensers, popular value..... £2 10 0
200 Assorted Silver Mica Condensers, popular values..... £2 10 0
200 Assorted Carbon Resistors, ½, ½ and 1 watt. Good selection £1 10 0

PAXOLIN SHEET. 18 x 4½ x 1/16in. 1/6; 10 x 10 x 1/32in. 1/6; 20 x 10 x 1/32in. 3/-; 10 x 10 x 1/16in. 2/-; 20 x 10 x 1/16in. 4/-. Minimum P. & Pkg. 1/6

BARGAIN OFFER OF BATTERIES
4½ v. Heavy Duty Bell Battery. Size 6½ x 4½ x 2½in..... 2/6
72 v. H.T. 1.5 v. L.P. Size 6 x 5 x 1¾in..... 2/6
150 v. H.T. Size 2¾ x 5½ x 1¾in..... 5/6
67½ v. Size 2¾ x 3¾ x 2¾in..... 6/6
60 v. H.T. 1.5 v. L.T. 3½ x 3¾ x 1¾in..... 4/6
All batteries sealed and unused. All plus 1/6 post and pkg. Special reduction for quantities.

4-way Push Button Units 2/6 each. Knobs for same 3/- per doz.

WEARITE COILS. PA4, PO4, PA5, POS, 1/3 each.....doz. 12/-

VALVE HOLDERS. Moulded B9A 7/6; B7G 6/-; Int. Oct. 9/-; Eng. Oct. .....doz. 4/6

VALVE HOLDER FITTED WITH LOWER CAN 1/6 per doz. extra. Screening cans for B7G and B9A .....doz. 6/-

JONES PLUGS AND SOCKETS. 4 pin 2/6 per pair; 6 pin 3/6 per pair; 8 pin 4/6 per pair; 12 pin 6/6 per pair. If cover required send 1/6 extra per cover.

POINTER KNOBS. Small black with white line, standard ¼in. spindle ..... doz. 7/6

WANDER PLUGS. Red and black .....doz. 2/-

PHILIPS TRIMMER TOOLS 1/- each .....doz. 10/6

CASH WITH ORDER OR C.O.D. ALL ORDERS DEPT. W.I.

ALL ORDERS FOR LESS THAN £2 ADD POSTAGE.

We invite your enquiries for items not listed

Trade Counter open 9 to 6 Monday to Friday.

Also 9 to 1 Saturdays. Callers welcomed.

WHOLESALE MANUFACTURERS AND EXPORT ENQUIRIES INVITED

SPUTNIK

The very word Sputnik conjures up ideas of great scientific development in the near future . . . magnetic recording will play its part in these developments and we shall aim to supply recording heads for every application that arises.

Examples from our range:



WE SPECIALISE IN HEADS

(H) Heads for Tape, Heads for Cine Film, Heads for Discs, Storage Drums, etc. And we can always quote for making up heads to your special requirements

Type H. Tubular Head, fitted to an adjustable holder. Suitable for ¼in. tape.

Type E. Combined Record/Playback/Erase Head for Tape (75/- each).

Type G. Tubular Head Element ¾in. dia., ¾in. long Fully screened. Fits all sorts of holders for tape, cine, storage drums, etc. (46/- each).

Type M. As Type G but with low impedance only 1/16in. dia., ¼in. long (42/- each).

Type B. For Miniature Recorders, Projectors, etc. 1/16in. dia., 9/32in. high (88/- each).



SEND FOR COMPREHENSIVE LISTS TRADE ENQUIRIES INVITED.

P. A. MARRIOTT & CO.
Sunleigh Works, Sunleigh Road, Alperton, Middlesex.
Phone: Wembley 7493



Hi-Fi Furniture in the contemporary trend

The illustration shows the NORDYK range, from left to right the SPEAKER ENCLOSURE for 8" or 10" speaker **£5.17.6d.**; RECORD UNIT holding 150 records **£4.17.6d.**; GRAM. UNIT for tape deck or gram. turntable **£5.19.6d.**

Send for full details and nearest stockist to:—

RECORD HOUSING **Dept. WW 28, Brook Rd., London, N.22**
Phone BOWes Park 7487/8

● MULTIMETERS ● OSCILLOSCOPES ●

SIGNAL GENERATORS

TEST EQUIPMENT REPAIR

FREQUENCY METERS

COLLECTION & DELIVERY 100 miles radius
(OVER 100 MILES BY ARRANGEMENT)

BACK TO *YOU* IN *7 DAYS* (with few exceptions)
AUTOMATION & ELECTRONIC MAINTENANCE ENGINEERS

Repairs, Calibration and Overhaul of —
All leading makes of English and American Electrical and Electronic Test Equipment

TEST EQUIPMENT REPAIR
LEIGH ROAD, LEIGH, LANCS. TEL.: LEIGH 1687

● PATTERN GENERATORS ● MEGGERS ●

Stern's "fidelity" TAPE RECORDER

"IT REALLY DOES SOUND BETTER THAN ANY OTHER"

TESTED AND APPROVED AT THE TRUVOX LABORATORIES

IT INCORPORATES: The NEW TRUVOX Mk. IV TAPE DECK together with the "fidelity" MODEL HF/TR2 TAPE AMPLIFIER (both fully described on this page), and a Rola 10 × 6in. P.M. speaker.

BEFORE CHOOSING YOUR TAPE RECORDER YOU SHOULD HEAR THIS MODEL—TRULY "Hi-Fi" RECORDINGS ARE OBTAINABLE and it is comparable to much higher-priced Recorders.

Alternatively send S.A.E. for ILLUSTRATED LEAFLET.

PRICE . . . Including CRYSTAL MIKE and 1,200ft. reel of PLASTIC TAPE.

£49.10.0. (OR £3 EXTRA WITH REV. COUNTER)

(Plus £1/10/- carriage and insurance, of which £1 is refunded on return of Packing Case.)

CREDIT SALE: Deposit £12/8/- and 9 monthly payments of £4/10/8.

HIRE PURCHASE: Deposit £24/15/- and 12 monthly payments of £2/5/11.

A COMPLETE KIT OF PARTS TO BUILD

The "fidelity" TAPE AMPLIFIER Model HF/TR2 including POWER SUPPLY UNIT

FOR ONLY **£12.0.0** (Plus 5/- carr. and ins.)

This amplifier has been expressly designed to meet the requirements of the enthusiasts for High Fidelity reproduction. It is based on the very successful design, completed by the Mullard Technicians and only really high-grade components are incorporated; truly HIGH FIDELITY Recordings are obtainable whilst "Hi-Fi" reproduction is assured by use of a high-quality Output Transformer by Gilson. It incorporates a "magic eye" Recording Level indicator, a two-position equaliser for 3¾in. and 7½in. speeds, and an effective Tone Control arrangement. Monitoring and Extension Speaker Socket are incorporated and in addition a position is provided to enable it to be used as an independent Amplifier for Gramophone Records or Radio Tuning Unit. Overall size: 11in. × 6in. × 6in. high. Suitable for nearly all makes of Tape Decks When ordering, please advise make of deck in use.

THE ASSEMBLY MANUAL PRACTICAL DIAGRAMS, etc., are available for 2/9 or send S.A.E. for brief details.

WE ALSO SUPPLY THE HF/TR2 ASSEMBLED AND READY FOR USE FOR £16.0.0 (Plus 6/- carr. & ins.). **H.P. TERMS:** Deposit £8 and 9 monthly payments of £1. **CREDIT TERMS:** Deposit £4 and 9 monthly payments of £1/9/4.

THE NEW TRUVOX Mk. IV TAPE DECK

UNDOUBTEDLY ONE OF THE BEST TAPE DECKS ON THE MARKET

PRICE £27.6.0 (Plus 10/- carr. and ins.)

CREDIT TERMS: Deposit £6/17/- and 9 monthly payments of £2/10/-.

H.P. TERMS: Deposit £13/13/- and 12 monthly payments of £1/5/4.

SPECIFICATION:— ●3 B.T.H. shaded pole motors with silent friction drive eliminating wow and flutter. ● Push-button controls, electrically and mechanically interlocked (patented). ● Patented electric-type push-button controlled brake. ● Inching to assist editing; tape loading on the drop-in principle; accommodation for reels of 7in. diameter. ● Tracking sense. To British and American standards. ● Playing times: Up to 3 hours with L.P. Tape or 2 hours with Standard Tapes. ● Two tracks side by side, with safety gap. ● Playing time indication by precision revolution counter of large visual type indicator plate, according to choice. Positive Azimuth adjustment of Record/Player Head. ● High Impedance Heads. ● The metal work is Gold Hammered finish. ● Overall size 14½in. × 12½in., from top of face of panel, overall depth 5in.

The Mk. IV DECK CAN ALSO BE SUPPLIED INCORPORATING PRECISION REV. COUNTER for £30/9/-. **H.P. TERMS:** Deposit £15/4/6 and 12 months of £1/8/3. **CREDIT SALE:** Deposit £7/12/3 and 9 months of £2/15/10.

Home Constructors!

BUILD YOUR OWN "Hi-Fi" TAPE RECORDER

WE OFFER YOU

a) The model **HF/TR2 AMPLIFIER** and **POWER UNIT**, both fully assembled, together with the TRUVOX MK IV TAPE DECK for..... **£38 10 0**
ALTERNATIVELY as above but the HF/TR2 Amplifier and P/Unit as a COMPLETE KIT OF PARTS **£35 0 0**

(b) The model **HF/TR2 AMPLIFIER** and **POWER UNIT** both fully assembled, together with the TRUVOX TAPE DECK incorporating PRECISION REV. COUNTER **£41 10 0**
ALTERNATIVELY as above but the HF/TR2 Amplifier and P/Unit as a COMPLETE KIT OF PARTS **£38 0 0**

(c) The model **HF/TR2 AMPLIFIER** and **POWER UNIT**, both fully assembled, together with the COLLARO TRANSCRIPTOR..... **£35 0 0**
ALTERNATIVELY as above but the HF/TR2 Amplifier and P/Unit as a COMPLETE KIT OF PARTS **£31 10 0**
plus 12/6 Carr. and Insurance.

TO COMPLETE THE RECORDER . . . WE OFFER

The Portable Carrying Case . . . Acos Crystal Mike . . . Rolo 10" × 6" P.M. SPEAKER . . . 1,200 ft. Plastic Tape

ALL FOR **£8.10.0** (plus 7/6 Carr. & Ins.)

STERN'S TAPE PRE-AMPLIFIER and ERASE UNIT



Provides the "Link" between the HIGH-QUALITY AMPLIFIER and TAPE DECK.

MODEL HF/TR1P . . . A completely assembled Pre-Amplifier with own Power Supply. Can be supplied correctly matched for use with Truvox or Collaro Decks, and incorporates Recording Level Indicator and Monitoring facilities.
Please send S.A.E with any inquiry.
PRICE **£11.10.0** (plus 5/- carr. and insurance)

WE MAKE SPECIALLY REDUCED PRICES FOR COMBINED ORDERS

ADD TAPE TO YOUR EXISTING AMPLIFIER . . . *WE OFFER YOU*

(a) The Model **HF/TR1P TAPE PRE-AMPLIFIER** together with the TRUVOX MK IV TAPE DECK **£35 0 0**
(b) ALTERNATIVELY as in (a) above but Truvox Deck incorporating PRECISION REV. COUNTER **£38 0 0**
(c) The model **HF/TR1P TAPE PRE-AMPLIFIER** together with the COLLARO TRANSCRIPTOR Tape Deck **£31 10 0**

PLEASE INCLUDE 12/6 to cover cost of Carriage and Insurance.

HIRE PURCHASE and **CREDIT SALE TERMS** are available on all equipment (excluding Kits of Parts). Send S.A.E. for details.
NOTE . . . The Collaro Transcriptor is in short supply and there may be a delay in delivery. We will however book an order.
The Deck switches of the Transcriptor have to be "wired-up." We will complete this wiring, for use with either the HF/TR2 or the HF/TR1P, for an extra charge of **£1.0.0.**

NEWS!! Our "fidelity Junior" Tape Recorder is now available. It is similar in appearance to the "fidelity" model illustrated above, but it incorporates the TRUVOX Mk. III TAPE DECK and the correctly matched HF/TR1A TAPE AMPLIFIER. PRICE COMPLETE including 1,200 ft. Tape and Crystal links ..... **39 GNS.**
H.P. and Credit Terms available.

Open Monday to Friday 9 a.m.—6 p.m. Saturday 9 a.m.—1 p.m.

STERN RADIO LTD.

(DEPT 109/W)

109 & 115 FLEET ST., LONDON, E.C.4

Telephone: FLEet St. 5812,3,4

XUM

MODERNISE YOUR OLD RADIOGRAM

IT'S MUCH BETTER

THE NEW ARMSTRONG P.B.409 AM/FM RADIOGRAM CHASSIS

PRICE **£29.8.0** (Plus 7/6 carr. and ins.)

TERMS: Credit Deposit £7/7/- and 9 monthly payments of £2/14/-. H.P. Dep. £14/14/- and 12 monthly payments of £1/7/3.

BRIEF SPECIFICATION:—
A 9 valve line up employing the latest MULLARD preferred-type valves. ● Provides complete coverage of the VHF/FM Transmissions, plus the SHORT, MEDIUM and LONG waves. ● Has Push-Pull output with negative feedback, for 6 watts Peak output. ● Quick action "Piano Jey" Selectors and separate Bass and Treble Controls. ● Has "Magic Eye" Tuning Indicator. ● Dimensions 13in. × 9½in. × 8in. high. Dial size 11½in. × 6½in.

THE ARMSTRONG MODEL A.F. 105 AM/FM RADIOGRAM CHASSIS

A Genuinely Hand Made Chassis



Developed to meet the needs of those who require really high quality radio and record reproduction but who, for reasons of expense or lack of room in existing or proposed cabinets, cannot consider the normal high-fidelity system. The A.F.105 is as good as, or better than, many of the high quality amplifiers, and Associated units. Independent and continuously variable Bass and Treble controls give a wide range of control. **SEND S.A.E. FOR DETAILS.**

PRICE **£37** (Plus 7/6 carr. and ins.).

CREDIT SALE TERMS: Deposit £9/5/- and 9 monthly payments of £3/7/10.
HIRE PURCHASE TERMS: Deposit £18/10/- and 12 monthly payments of £1/14/4.

THE DULCI MODEL H.4



COMBINED AM/FM RADIOGRAM CHASSIS

A 4 Waveband Receiver designed for first-rate reproduction of Radio and Gram.

PRICE **£24.6.6** (Plus 7/6 carr. & ins.).

CREDIT TERMS: Deposit £6/2/- and 9 monthly payments of £2/4/7. **H.P. TERMS:** Deposit £12/3/3 and 12 monthly payments of £1/2/7.
BRIEF SPECIFICATION:—
● Covers Short, Medium, Long and F.M. Wavebands
● Employs full A.V.C.
● The Latest 7-valve line-up
● For 3 or 15 ohm P.M. Speakers.
● "Magic Eye" Tuning Indicator.
● Excellent Tone range up to 4 watts output.
● Internal aerial for local stations.
● Overall size 12in. × 8½in. × 7½in. high.
A good Quality Chassis and Well Recommended.

HOME CONSTRUCTORS!!

BUILD YOUR OWN "Hi-Fi" LOUDSPEAKER SYSTEM

WITH W-B's WELL KNOWN RANGE OF READY-TO-ASSEMBLE CABINETS. ALL ARE BEAUTIFULLY MADE AND FINISHED AND VERY EASILY ASSEMBLED. ONLY A SCREWDRIVER IS REQUIRED, THEY ARE PACKED FLAT IN CARTONS AND COMPLETE WITH SCREWS.
WE SHOW A FEW HERE BUT OTHERS ARE AVAILABLE. SEND S.A.E. FOR LEAFLET.

CALL IN AND LISTEN TO THEM.

THE JUNIOR BASS REFLEX CORNER CONSOLE



A new contemporary-style cabinet specially designed to give maximum reproduction quality from Stentorian 8in. or 10in. units with provision for Tweeter Unit, if required. Measures 33in. × 22½in × 18½in. Price **£9/9/-** or with the 8in. Stentorian Speaker **£13/12/6** or with 10in. Stentorian Speaker **£14/8/6**.

The "PRELUDE" Hi-Fi CONSOLE CABINET



Takes any make of tape-deck or record player amplifier, pre-amplifier control unit, and radio tuner. Size 33in. × 19in. × 19½in. Height above baseboard is 6½in. Price **£13/13/-**.

THE "PRELUDE" BASS REFLEX CORNER CONSOLE



This most attractive cabinet has been specially designed to utilise the natural acoustic properties of the walls, and is also obviously suitable for use where space-saving is a consideration. It is sturdily constructed to take every advantage of Stentorian 8in. or 10in. units with provision for Tweeter Unit. Size 33in. × 21in. × 17in. Price **£10/10/-** or with the 8in Stentorian Speaker **£14/13/6** or with the 10in. Stentorian **£15/9/6**.

The "PRELUDE" Hi-Fi TABLE CABINET

Designed to take any make of Tape Deck or Single Record Player (not Auto-changers) Amplifier, Pre-amplifier Control Unit, and Radio Tuner. Price **£9/19/6**. Size 19½in. × 19in. × 19½in.

HIRE PURCHASE and CREDIT SALES TERMS ARE AVAILABLE . . . SEND S.A.E. for details
WE ALSO HAVE THE GOODMANS SHERWOOD ENCLOSURE IN STOCK.

THE DULCI MODEL H3.

COMBINED AM/FM RADIOGRAM CHASSIS



This model is very similar to the model H.4 described above but covers 3 WAVEBANDS instead of 4 (omitting the Short Band) and is for 3 ohm Speakers only. Overall size is as for the H.4.

PRICE **£20.17.0** (Plus 7/6 carr. and ins.).

CREDIT TERMS: Deposit £5/4/3 and 9 monthly payments of £1/18/4. **H.P. TERMS:** Deposit £10/8/6 and 12 monthly payments of 19/4.

THE DULCI MODEL H.4T

Combined AM/FM Tuning Unit incorporating own Power Supply.

MODEL H.4T. This model is the "TUNER UNIT VERSION" of the H.4 Radiogram Chassis illustrated and described above. It has the same coverage of A.M. and F.M. Wavebands (4 altogether) and precisely the same in size and appearance except that it has three Controls only, being: TUNING, WAVECHANGE and Volume On/Off, mounted centrally on the chassis. A self-contained Tuner incorporating own Power Supply

PRICE **£20.17.0** (plus 7/6 carr. & ins.)

CREDIT TERMS: Deposit £5/4/3 and 9 monthly payments of £1/18/4. **H.P. TERMS:** Deposit £10/8/6 and 12 monthly payments of 19/4.

Stern's "fidelity" F.M. TUNING UNIT

A 5-Valve Tuner incorporating the latest **Mullard Permeability Tuned Unit.** Price assembled less Power Supply:

£14.10.0

(Plus 7/6 carr. and ins.).

TERMS: (a) **H.P.** Deposit **£7/5/-** and 9 monthly payments of **18/4**:
(b) **Credit** Deposit **£3/12/6** and 9 monthly payments of **£1/6/7.** Provides "Hi-Fi" reproduction with any make of Amplifier and many Radio Receivers. It incorporates: ● The latest Valve line-up—ECC85, 2 type EF85, EF91 and EM80. ● A "Magic Eye" Indicator. ● Power consumption is 1.7 amps. at 6.3 volts and 25 m/s. at 250 volts.

STERN'S "fidelity" COMBINED A.M. and F.M. TUNING UNIT

This is IDENTICAL to the Stern's F.M. Tuner illustrated above, but in addition incorporates the MEDIUM WAVEBAND and thereby also provides a selection of foreign stations. **PRICE** **£18.18.0** (Plus 7/6 carr. and ins.).

TERMS:—(a) **H.P.** Deposit **£9/9/-** and 10 monthly payments of **£1/1/-**; (b) Credit Deposit **£4/15/-** and 9 monthly payments of **£1/14/7.** Send S.A.E. if further data required.

HOME CONSTRUCTORS . . . You can build

(a) The "fidelity" F.M. TUNING UNIT FOR **£10.0.0**

(b) The "fidelity" "AM/FM TUNING UNIT for **£13.10.0**

The COMPLETE ASSEMBLY DIAGRAMS and INSTRUCTIONS CAN BE OBTAINED FOR 1/6 each.

!! SPECIAL CASH OFFERS !!

The Latest Collaro 4 Speed Single Record Player

Incorporating the very popular STUDIO "0" CRYSTAL PICK-UP.
For only **£6.19.6**
(Plus 5/- carr. and Ins.).

Incorporates Auto-Stop and Plays 78 r.p.m. and all types of L.P. Records.

The Collaro "Junior" Rim Drive 4 Speed Record Player

Offered complete with Collaro Crystal Pick-up. For **£4.10.0**
(Plus 4/- carr. and ins.)
We also offer . . . Gram Motor and Turntable at **£3/2/6.** Crystal Pick-up only, **£1/12/6.** (Carr. and Ins. 2/6 extra).

IT'S MUCH CHEAPER

"FRUSTRATED EXPORT ORDER"

The Cossor Model 527/X 4 Valve "All-dry" Battery Portable.
Offered For **£6.15.0**
Plus 5/- carr. & ins.

Consists of a 4 valve Superhet Receiver covering Medium Waveband 197-575 metres, and two Short Wavebands 13.6 to 136 metres. The new low consumption valves are incorporated and the whole is accommodated in an attractive robustly made case. Battery required is 90 volts and 1.4 volts (price **19/6**) and is external to case.

RECORD PLAYERS

THE VERY LATEST MODELS ARE IN STOCK
MANY AT REDUCED PRICES !!!!
TRANSCRIPTION UNITS—AUTOCHANGERS SINGLE RECORD PLAYERS
Send S.A.E. for ILLUSTRATED STOCK LIST

CASH ONLY OFFER !!!

This latest Brand New B.S.R. MONARCH 4-SPEED AUTOCHANGER
£8.7.6 (Plus 5/- carr. and ins.).

● Minimum baseboard size required 14in. × 12½in. with height above 5½in., & height below baseboard 2½in.

WE ALSO HAVE A FEW ONLY

COLLARO 4-Speed "Mixer" Autochangers. The Units are BRAND NEW and incorporate the STUDIO "0" Pick-up. PRICE **£8.19.6** (Plus 5/- carr. and ins.)

Open Monday to Friday 9 a.m.—6 p.m.
Saturday 9 a.m.—1 p.m.

STERN RADIO LTD.

AMPLIFIERS PRE-AMPLIFIERS

HIGH FIDELITY FOR THE HOME CONSTRUCTOR

TUNING UNITS RADIO RECEIVERS

—COMPLETE KITS OF PARTS FOR THE "Hi-Fi" ENTHUSIAST—

QUALITY OF THIS NATURE HAS NEVER BEFORE BEEN OFFERED AT SUCH LOW COST

STERN'S REMOTE CONTROL UNIT

Designed in particular for use with the MULLARD 5-10 Main Amplifier.

Ideally suited for simple domestic installation as an alternative to the more elaborate Pre-amplifier (shown and described opposite). Tone Control facilities are really excellent and in conjunction with the "5-10" Main Amplifier reproduction is of very high quality. Perfectly suitable for use with all the popular Record Players (B.S.R., Collaro, Garrard) and the modern Radio Tuner Units. Front Panel contains: (a) Coloured Indicator; (b) Separate BASS and TREBLE CONTROLS; (c) 3 position Selector Switch; (d) Volume Control. Inputs on back for Radio and Gram and Gram equalising is incorporated.
FULL DATA is contained in the 5-10 MAIN AMPLIFIER MANUAL at 1/6.

The MULLARD "5-10" MAIN AMPLIFIER



Probably the most popular and successful Amplifier yet designed and certainly needs no recommendation from us. Our kit is complete to MULLARDS specification including the latest PARMEKO ULTRA LINEAR OUTPUT TRANSFORMER and the recommended Mullard Valve line-up. All specified Components are supplied and Power Supply is available to drive a Radio Tuner Unit.
PRICE OF COMPLETE KIT OF PARTS **£9.10.0**
(Plus 5/- carr. & ins.)
or alternatively we supply—
FULLY ASSEMBLED AND TESTED for **£11.10.0**
(Plus 5/- carr. & ins.)
WE ALSO OFFER THE "5-10" INCORPORATING THE LATEST PARTRIDGE ULTRA LINEAR OUTPUT TRANSFORMER FOR AN EXTRA £1/6/-.
The ASSEMBLY MANUAL containing FULL SPECIFICATION is available for 1/6. It also includes full data on the REMOTE CONTROL UNIT.

STERN'S "fidelity" PRE-AMPLIFIER-TONE CONTROL UNIT

"A design for the Music Lover"

This unit can be used with any Main Amplifier. Briefly it has inputs for all types of MICROPHONES, HIGH and LOW GAIN PICK-UPS and a RADIO TUNING UNIT. It incorporates (a) GRAM EQUALISING CONTROL. (b) STEEPCUT FILTER. (c) Continuously variable BASS and TREBLE CONTROLS, a variable OUTPUT CONTROL which enables its use with any type of Amplifier, and Jack Sockets are incorporated for TAPE RECORD and TAPE PLAYBACK.
Used with the "5-10" the reproduction is comparable to that normally associated only with the very expensive commercially made High Fidelity Amplifiers. **£6.16.0**
PRICE OF COMPLETE KIT OF PARTS.
WE ALSO OFFER IT ASSEMBLED READY FOR USE **£8/10/-** (plus 5/- carr. & ins.).
The ASSEMBLY MANUAL contains full specification and is available for 1/6.

THE NEW MULLARD "3-3"



A VERY HIGH QUALITY AMPLIFIER PROVIDING EXCELLENT REPRODUCTION AND HAVING AN ATTRACTIVE ENGRAVED PERSPEX FRONT PANEL.

Price FOR COMPLETE KIT OF PARTS (plus 6/6d. carriage and insurance). **£7.10.0**
Alternatively supplied ASSEMBLED and FULLY TESTED **£8.19.6**
(plus 6/6d. carriage and insurance.)
The complete specification is available for 1/6d.
Developed from the very popular 3-valve 3-watt Amplifier designed in the Mullard Laboratories. Our kit is complete to the Mullard specification, including supply of specified components, valves and a PARMEKO OUTPUT TRANSFORMER. We also include switched inputs for 78 and L.P. records plus a Radio position. Extra power to drive a Radio Tuning Unit is also available.
THE IDEAL AMPLIFIER FOR A SMALL HIGH QUALITY INSTALLATION.

SPECIAL PRICE REDUCTIONS—WE OFFER

(a) The **COMPLETE KIT OF PARTS** to build both the **MULLARD 5-10** and the **REMOTE CONTROL UNIT** for **£11.11.0**
(b) The **COMPLETE KIT OF PARTS** to build both the **MULLARD 5-10** and the "fidelity" **PRE-AMPLIFIER-TONE CONTROL UNIT** for **£15.15.0**
ALTERNATIVELY WE WILL SUPPLY ASSEMBLED and FULLY TESTED, as follows:—

(a) The **MULLARD 5-10** and the **REMOTE CONTROL UNIT** for **£14.0.0**
CREDIT SALE TERMS: £3/10/- Deposit and 9 monthly payments of £1/5/8. H.P. TERMS: £7 Deposit and 9 monthly payments of 17/9.

(b) The **MULLARD 5-10** and the "fidelity" **PRE-AMPLIFIER-TONE CONTROL UNIT** for **£18.18.0**
CREDIT SALE TERMS: £4/15/- Deposit and 9 monthly payments of £1/14/7. H.P. TERMS: £9/9/- Deposit and 12 monthly payments of 17/6.

THE ABOVE PRICES ARE SUBJECT TO £1/6/- EXTRA IF PARTRIDGE TRANSFORMER IS PREFERRED.

WHEN ORDERING PLEASE INCLUDE 7/6 to cover cost of Carriage and Insurance

A FEW ONLY!!!

CASH OFFER

10-WATT POWER AMPLIFIER WITH STERN'S REMOTE CONTROL UNIT

A small "Surplus" purchase enables us to offer them for only **£10.0.0** (plus 6/6 carr. & ins.)

COMPLETE, TESTED and READY FOR USE.
A 5-Valve Amplifier having matched pair 6F6's in Push-Pull. Incorporates PARMEKO Mains Transformer, Choke and Output Transformer and provides really first class production. Has Power Supply available to drive Radio Tuning Unit.

A COMPLETE KIT OF PARTS, STERN'S 8-10 WATT AMPLIFIER

Has power supply available for Radio Tuning Unit.
Price of COMPLETE KIT OF PARTS (plus 5/- carr. & ins.) **£7.10.0**
WE ALSO OFFER IT ASSEMBLED and **READY FOR USE** for (plus 5/- carr. & ins.) **£9.10.0**
This amplifier has proved one of the most popular models yet offered to the HOME CONSTRUCTOR. It provides really excellent reproduction up to 8 watts, employing 6V6's in push-pull and incorporating negative feedback. Provides for the use of both 3 and 15 ohm Speakers. The complete SPECIFICATIONS and BUILDING INSTRUCTIONS are available for 1/6.

THE FOLLOWING HIGH FIDELITY AMPLIFIERS ARE IN STOCK

STERN'S COMPACT "5-9." A 2-stage high sensitivity Amplifier having separate BASS AND TREBLE Controls and GRAM EQUALISING. Developed for high quality reproduction, includes separate Power Supply Unit with spare power available to drive Radio Tuner. **£8.16.0**
THE DULCI MODEL D.P.A.10. A 10 watt "Ultra Linear" High Fidelity Amplifier with separate PREAMP-TONE Control Unit **£19.19.0**
THE DULCI MODEL H.11. A self powered AM/FM Tuning Unit combined with a "Hi Fi" Pre-Amplifier Tone Control Unit—all on one Chassis. **£29.3.10**
THE ARMSTRONG MODEL A.10 Mk. II. With associate PREAMP-TONE CONTROL UNIT, this model is perfectly consistent with Armstrong's very high reputation. **£32.0.0**
THE NEW LEAK "VARISLOPE" PRE-AMPLIFIER together with the TL/12 plus AMPLIFIER. **£34.13.0**
THE "VARISLOPE" is available separately for **£15.15.0**
THE ROGERS "JUNIOR." With associate PREAMP-TONE CONTROL UNIT. **£26.0.0**
THE RCA "ORTHOPHONIC" 12-20 watt high Fidelity Amplifier and associate PRE-AMPLIFIER TONE CONTROL UNIT **£41.0.0**
HIRE PURCHASE and CREDIT TERMS are available on all models.
Descriptive leaflets are available. Send S.A.E.
F.M. TUNING UNITS by MOST OF THE LEADING MANUFACTURERS.

STERN'S POWER SUPPLY UNIT

Fully smoothed with all output connections terminated to connecting Blocks, thereby enabling ease of connecting to a Radio Tuner Unit or Amplifier, etc. Overall size of Units is 9½in. × 3½in. × 4½in. high. TWO MODELS ARE AVAILABLE, Type "A" Unit provides 250-300 volts at up to 70 m/a. and 6.3 volts at 3½ amps.
PRICE **£2/17/6** (Plus 2/- carr. and ins.)
Type "B" Unit provides 250-300 volts at up to 100 m/a and 6.3 volts at 3½ amps.
PRICE **£3/3/0** (Plus 2/- carr. and ins.).

SPECIAL CASH ONLY OFFER!!

This very attractive PORTABLE AMPLIFIER CASE together with a good quality GRAM AMPLIFIER and a matched P.M. SPEAKER, ALL FOR ONLY **£8.7.6**
(plus 7/6 carr. & ins.)
The Amplifier consists of a 2 Stage design incorporating the 3 modern BVA valves and has separate BASS and TREBLE CONTROLS. The Portable Case will also accommodate almost any make of Autochanger and is attractively finished in Grey colour Rexine—WE ALSO SUPPLY SEPARATELY:—
(a) The 2-Stage (plus Rectifier) AMPLIFIER **£4/2/6**
(b) The PORTABLE CARRYING CASE.... **£3/17/6**
(c) 6½in. P.M. SPEAKER **18/9**
Carriage and insurance 4/- extra
We also have a smaller PORTABLE CASE ideal for Record Players. PRICE ONLY **£3/3/-** (plus 3/- carr. & ins.). Attractively finished in high-grade Rexine and robustly constructed with internal measurements at 13½ × 15½in. high. It will therefore accommodate all makes of Record Players including Autochangers. An uncut baseboard is also supplied.

DEPT. 109/W

109-115 FLEET ST. LONDON E.C.4

Phone: FLEet Street 5812-3-4

CLYNE RADIO LTD.

18, TOTTENHAM COURT ROAD, LONDON, W.1

MUSeum 5929/0095
(50 yards only from Tottenham Court Road Tube)
All post orders please to :—**162, HOLLOWAY ROAD, LONDON, N.7.**
NORth 6295/6/7

Have YOU had a copy of our 109 page comprehensive CATALOGUE! This invaluable publication is only 2/-, post free.

DULCI

DULCI H.3 AM/FM Chassis (7 valve) Covering Long, Medium and F.M. bands. Most attractive dial in RED and GOLD on BLACK background £20/17/- plus 5/- c. & p.
DULCI H.4 PUSH FULL AM/FM chassis £29/3/10 plus 5/- p. & p.
All Dulci products available ex stock. Illustrated leaflets and H.P. terms available.
Demonstrating at both branches.

JASON SWITCH TUNED FM FEEDER KIT

This excellent unit enables the selection of Home, Light or Third programme at the touch of a switch. Complete freedom from drift is ensured by the incorporation of Automatic Frequency Control. Valve line-up: 4-EF80, 1-ECF80. Front end completely prefabricated. When used in conjunction with a suitable amplifier superb quality is obtainable. The highest standards of efficiency and reliability that are the well-known features of the Jason Standard and Fringe Model FM Tuners have been maintained. Instruction booklet and our itemised price list 2/- post free or the complete Kit **£9/19/6**, plus P. & P. 2/6.

DULCI F.3.AM. RADIOGRAM CHASSIS. We are very fortunate in being able to offer a further limited quantity of this very popular and efficient chassis at a greatly reduced price. Specification: Three wavebands, Long, Medium and Short. Valve line-up: X79, 6BA6, 6AT6, EL84, 6X4 (or equiv.). Four controls: Tone, ON/OFF. Volume. Wavechange. Tuning. Output 4 watts matched to 3-5 ohms. Incorporates latest Ferrite Rod Aerial. Input sockets for crystal or magnetic pick-up. Provision for mains supply, to gram motor. Overall dimensions 12in. L × 7in. D. × 7¾in. H. Attractive dial with Red, Gold and Green lettering on Black background. Dial size 11¾in. × 4¾in. Price, whilst stocks last, only **£10/5/-**, plus 3/6 P. & P. Terms available.

ANNOUNCING OUR NEW F.M. TUNER KIT (printed circuit). This is our printed circuit version of the Osram 912 F.M. Tuner—using T.C.C. printed circuit and condensers, incorporating 5 valves and two germanium diodes. Attractive black and gold dial, with gold escutcheon plate. Dial aperture only 5 × 2in. Osram F.M. booklet plus our additional instructions and individually priced components list—2/6 post free or the Kit absolutely complete at **£9/8/-** plus 2/6 P. & P. Alignment service available if required. We are demonstrating at both branches.





THE JASON FM TUNER

Based on the booklet by Data Publications Ltd., 2/- post free, including our individually priced Parts List. Highly sensitive, free from drift. Incorporates 4 valves 6AM6 and 2 specially graded G.E.C. Crystals. The kit supplied includes drilled chassis with tuning condenser, scale calibrated in mc/s, and attractive bronze stove-enamelled front plate already mounted (illustrated). Front plate size 8in. × 5in. Chassis 7in. × 4¼in. × 1¼in. Complete standard kit **£6/15/-** plus 2/6 P. & P. Fringe area kit **£7/15/-** plus P. & P.

THE RC 3/4 WATT AMPLIFIER KIT. Compare the advantages. Treble, base **AND** middle controls. For crystal or magnetic pick-up. A.C. Mains 200/250 v. Valve line-up: 6V6GT, 6SG7 metal 6X5GT. Negative feedback. Built on stove enamelled steel chassis, measuring only 8in. × 6in. × 1¾in. Four engraved cream knobs are included in the price of the complete kit with all necessary practical and theoretical diagrams at **£4/5/-** only, plus 2/6 packing and post or Instruction Book fully illustrated for 1/-. Post free. This amplifier can be supplied assembled, tested and ready for use at £5/5/- plus P. & P. Hearing is believing.



THE CRY-BABY ALARM



We proudly present this latest addition to our wide range of popular kits to build yourself. **Enjoy your leisure free from anxiety.** This highly efficient unit is simple to assemble, extremely sensitive and may be installed in a matter of minutes. Completely **SAFE** employing a double wound mains transformer. Attractively finished in Red and Grey (washable) "Lionide" with cream plastic escutcheon. Size only 7¼in. × 3¼in. × 6¼in. Supplied in kit form complete with mike at ONLY **72/6** plus 2/6 P. & P. or assembled and tested **89/6** P. & P. 2/6. Suitable mike flex available at 3d. a yd. Instruction book and price list available separately 1/- post Free. Note: For A.C. mains 200-250v. only.

JASON AM/FM KIT

This is a very high quality chassis for medium waves and FM, incorporating 8 of the latest miniature valves, plus DM70 magic eye. Kits are available for chassis complete with output stage at **£16/5/-**. Also less output stage but with own built-in power pack at **£13/19/6** only. These are high fidelity units and exceptional value at these prices which include all required components and full constructional details. Fully illustrated Data Booklet with full construction details, plus individually priced component list available per return of post 2/- post free. Both plus 3/6 P. & P.

FM POWER PACK KIT. We can now supply complete kit for power pack suitable for the above F.M. tuner or any other similar type. Price for the complete kit is **37/6** only or **52/6** for ready assembled unit. This pack is extremely small, incorporating valve rectifier tyoe 6 × 4 and built on chassis size only 6in. × 4in. × 1¼in. Optional extra for power pack. Bulgin Octal Plug 2/3.

RC4.FAM AM/FM RADIOGRAM CHASSIS. A new style AM/FM Chassis employing a printed circuit F.M. Tuner section. Valve line-up: 8 valves ECC85, 6BA6, 12AH8, 6BA6, 6AL5 6AT6, EL84, 5Y3. Most attractive dial 12 × 5¼in. (fully illuminated with figures in green, red and white on black background. Four controls: Tuning, Volume, Wavechange and Tone/On/Off.

Dimensions (overall): 13 × 9 × 6in. Frequency coverage (four wavebands) 1,000-2,000m. 200-550 m. 15-50 m., 88-100 mc/s. This is an excellent and very efficient chassis. Price **£22/10/-** plus 5/- P. & P.

AM/FM CHASSIS BARGAIN

By leading manufacturer. Seven valves—ECC85, ECH81, EF85, EABC80, EL84, EZ80, EM81. Covers long, medium and F.M. bands. Separate bass and treble controls. Illuminated volume control on extended lead. Attractive easily read edge lit dial, vertical or horizontal to choice. Incorporates Mullard F.M. tuner section. Overall dimensions: 12in. L. × 10in. W. × 10in. D. Brand new and fully guaranteed. Whilst stocks last only **£18/19/6** plus 5/- P. & P. H.P. or Credit Sale Terms available.



SPEAKERS & ENCLOSURE
Full range in stock by WHARFEDALE W.B., T.S.L., etc.
Your enquiries welcomed.

All components in stock for the B.B.C. "Building your own Radio Set." Send stamp for price list.

THE NEW R.G. TRANSISTOR/RECEIVER KIT

This receiver, covering medium waveband, which can be assembled in about 1 hour, will give amazing volume and tonal quality when used in conjunction with a good aerial and earth. Incorporating PNP Transistor and Germanium Diode. For headphone reception.
Included with the kit of parts is a handsome plastic case in black and white, measuring 4½ × 2½ × 1¾in. This case accommodates the complete receiver, including battery. **PRICE OF COMPLETE KIT 95/-, plus 1/3 P. & P.**
Lightweight high resistance headphones can be supplied separately at **15/-** pair. If, however, the kit is purchased complete with headphones this will be supplied at a **SPECIAL INCLUSIVE PRICE OF 37/6** plus 1/6 P. & P.
Optional extra. 100ft. coil single 7/36 coloured P.V.C. covered wire suitable for both aerial and earth, 2/6 only.



BARGAIN CORNER

TAYLOR "MONTROSE" POCKET TEST-METER. A most useful AC/DC multimeter with eight ranges covering: 3 amp. 300 mA. 30 mA. 6 v. 30 v. 150 v. 300 v. and Circuit Test. Scale length approx. 2in. Complete with test leads. Size: 3¾in. × 3in. × 1¾in. BRAND NEW.
FULLY GUARANTEED 63/-. Plus 1/- P. & P.

AMERICAN SUPER-LIGHTWEIGHT HEADPHONES. Magnetic type. Fitted rubber earmoulds. Impedance 50 ohms Brand new 15/- pr., plus 1/- P. & P.

9in. × 5in. ELLIPTICAL LOUDSPEAKERS Few only. Brand new, **32/6** plus 1/6 P. & P.

DECCA Lightweight pick-up complete with Studio "G" turn-over crystal insert and sapphire styli. **ONLY 47/6** plus 1/6 P. & P. BRAND NEW.

DUAL CONCENTRIC CONE LOUDSPEAKER. 6½in. dia., 3-5 ohm speech coil. Excellent quality few only at **35/-** each plus 1/- P. & P.

NEW PLASTIC RECORDING TAPE. 1,200 ft. on plastic spool. **21/-**, plus 1/6 P. & P. 3 spools for **63/-** post free.

Our advantageous H.P. and Credit Sale terms are available on any single item over £5. Your enquiries invited.

If not stated, please add postage on orders under £1. Cash with order or C.O.D. (charges extra).

Open: Tottenham Court Road: 9 a.m. to 6 p.m. Mon. to Fri., Sat. 1 p.m.
Holloway Road: 9 a.m. to 6 p.m. daily Thurs. 1 p.m., Sats. 5.30 p.m.

THE "SUPERIOR FOUR" KIT. Our superior four-valve receiver A.C. mains, 200/250 v. M. and L. waves. As with our very successful "Economy Four" all required components are supplied. Valve line-up: 2 6BG7, 6 X5GT and 6 V6 G T. Chassis ready drilled. Cabinet size 10½in. × 10in. wide Maximum depth at base 5in. tapering to 3½in. at top. Sloping front. Very attractively finished in light walnut and peach. Each component brand new and tested prior to packing. Complete instruction booklet with practical and theoretical diagrams is provided. Booklet available at 1/6 post free. Our price for complete kit £6/9/6. Please add 2/6 P & C. If preferred, we can supply Cabinet Assembly only, comprising Cabinet and bracket wave-change switch, dial pointer, drum, pulleys, drive spindle, drive spring and knobs, at 45/-, plus 2/6 P. & C. N.B.—Our kits are even supplied with sufficient solder for the job.

THE R.C. 2 AMP. BATTERY CHARGER KIT. Includes handsome well-ventilated stove-enamelled steel box, size: 7½in. ×3½in. × 3½in. Fully shrouded first quality transformer, brand new G.E.C. rectifier. Mains fuse, etc., for charging 6 or 12 v. batteries at 2 amp. Absolutely complete kit with full practical and theoretical instructions. Price 38/6 plus 2/6 P. & P. Can be supplied assembled and tested at 45/- plus P. & P. Heavy duty crocodile clips suitable for car battery lugs, optional extra at 1/6 per pair.

No. 38 TRANSMITTER/RECEIVER. (popular Walkie-Talkie). We have been most fortunate in obtaining a further supply of these complete stations comprising TX/RX unit, headphones, microphone, aerial, junction box, battery satchel and full operating instructions. Range: approx. 5 miles. Frequency coverage: 7.4-9 mc/s. ABSOLUTELY BRAND NEW. 65/-. Export enquiries invited.

No. 18 TRANSMITTER/RECEIVER UNIT! We have just taken delivery of a quantity of these fine units, brand new and complete. This is a very good portable, self-contained transmitter/receiver designed for short range tele-phony and C.W. Range approx.: 5 miles. Frequency coverage 6 mc/s-9 mc/s. All accessories supplied, i.e., Headphone, Mike, Morse Key, Aerial, comprehensive instruction book with circuit diagram. Valve line-up: 3 ARP12, 2 AR8, 1 ATP4. Weight: approx. 22lb. Dimensions (overall): 8in. × 10in. × 17in. UNREPEATABLE at 90/6 plus 7/6 C. & P.

CONSTRUCTORS NOTE!! RADIO DATA BOOKS AVAILABLE, i.e. Valve guide, Colour code, etc. Send stamp for list.

THE "NEW LOOK" RAMBLER

Our most popular All-Dry Portable Superhet Kit is now being supplied with a new cabinet of even more attractive appearance. The new cabinet is covered with "LIONIDE" which is washable and unscratchable. Colour: two-tone GREY/RED. The standard cream plastic top panel with dial engraved in red completes the overall "air of quality." This receiver really has everything. Built-in frame aerial high quality, extremely sensitive and very adequate volume from the 5in. loudspeaker. Valve line-up: 3V4, 1R5, 185, 1T4. The complete kit, including cabinet, can be supplied from stock at the original special inclusive price of £7/7/- plus 2/6 p. & p. (less batteries). Uses Ever Ready 90 v. H.T. type B126 at 10/- and 1.5 v. L.T. type A.D.35 at 1/6. Instruction book available separately at 1/6 post free, contains easy to follow practical diagrams, circuit and individual component price list.

RAMBLER MAINS UNIT. Enabling the above receiver to be used on A.C. mains. Very easily fitted. Complete kit, when assembled, fits snugly into battery compartment. KIT PRICE 47/6. Assembled and tested 65/-. Both 1/6 p. & p. This unit is completely self-contained in metal box measuring 7in. × 2½in. × 1½in. and is ideally suitable for most all-dry portables requiring 90 v. H.T. and 1.5 v. L.T. IMPORTANT: Please state valve line-up when ordering.

"FAMILY FOUR." Our new T.R.F. kit with handsome brown bakelite cabinet. This receiver gives results comparable to many commercially made receivers costing twice this price. ONLY £4/19/6 plus 2/6 p. & p. Instruction booklet available separately at 1/6 post free.

N.B.—All our T.R.F. Kit circuits include specially wound Denco "Max Q" coils on polystyrene formers, improved performance. Price remains the same.

SURPLUS METER BARGAINS
We have large stocks of meters from 50 microamp to 300 v. and will be pleased to forward a complete list upon receipt of 3d. stamp.
METER RECTIFIERS. 1 ma. and 5 ma. each at 6/6. Brand new.

RETURN OF A WINNER !!!

(Exclusive)



We have been most fortunate in obtaining a further limited supply of this fine and popular cabinet. Instantly recognised as being of leading-High Quality manufacturer's stock, this trolley-type cabinet is finished in polished dark solid walnut. Can easily be adapted to accommodate tape recorder, amplifier, radiogram, etc., etc. External measurements: 24½in. × 16in. × 29in. The whole is mounted upon "easy run" castors. Unrepeatable at this price £5/19/6, plus 15/- C. & P.

SPECIAL PURCHASE from MINISTRY BRAND NEW No. 17 Mk. II TRANSMITTER/RECEIVER

Built into strong wooden cabinet 15in. × 14in. × 9in. Complete with headphones and microphone. Range 5-8 miles with simple aerial. Frequency coverage 44-61 mc/s (5-7metres). Uses standard 120 v. H.T., and 2 volt L.T. batteries. Complete with full operating instructions. 59/6

No. 17 Mk. II, as above, but secondhand, in good condition and complete, 45/-.

THE "ECONOMY FOUR" T.R.F. KIT. A three-valve plus metal rectifier receiver. A.C. mains 200/250 v. Medium and Long waves. We can supply all required components right down to the last nut and bolt. Valve line-up: 6K7, 6J7 and 6V6. Chassis ready drilled. Cabinet size 12in. long by 6in. high by 8in. deep—Choice of ivory or brown Bakelite or wooden walnut finish cabinet. Complete instruction booklet with practical and theoretical diagrams. Each component brand new and tested prior to packing. Our price £5/10/- complete—Remember this set is being demonstrated at our shop premises. We proudly claim that our fully illustrated instruction booklet is the most comprehensive available for this type of receiver—Booklet available at 1/9 post free. This is allowed if kit is purchased later. Plus 2/6 packing and carr. for complete kit.

The R.E.P. 1-Valve RECEIVER. All dry battery operation, for use with headphones, the complete kit is available at 42/-, less battery, plus 2/- P. & P. or full instructions at 9d. post free.

GRAMOPHONE MOTORS are in SHORT SUPPLY

COLLARO AC 3/554; Three speed single player for AC mains 200/250 v. Cream finish, complete with turnover crystal pick-up incorporating the well-known high output "T" type head. Strictly limited quantity at £6/19/6 plus 3/6 P. & P.

COLLARO 4-SPEED single record unit with separate pick-up and HGP59 crystal cartridge. Brand new, few only. £4/12/6 plus 3/6 P. & P.

FOUR-SPEED CHANGERS
Collaro RC456 Mixer Auto-Changer in cream with Studio "O" insert, £8/19/6. B.S.R. MONARCH. Mixer Auto-Changer, in cream and gold, £8/15/. Both plus P. & P. 3/6. H.P. Terms available. Stocks rapidly diminishing.

THE STAAR "GALAXY"

Four speed Mixer Auto-Changer. Finger-tip stop. Start and speed change control. Modern duo-tone finish. Beautifully made and moderately sized to fit almost any cabinet. For A.C. mains operation 110-250 v. Price £9/15/-, inc. P.T. STAAR GALAXY complete with base £10/19/6 inc. P.T. Both plus 3/6 C. & P.

RECORD PLAYER CABINETS—to suit all types of single record and autochanger units. Price from 45/-. Send stamp for fully illustrated list.

PORTABLE GRAM AMPLIFIERS

RC1.A. AMPLIFIER. A small high quality gramophone amplifier employing the latest circuitry and highly efficient miniature valves. Very neat chassis finished in bronze stove enamel. Size: (overall) 5½ × 4 × 8in. Valves 6X4, ECL82. Output 3 watts max. Controls. Volume. Tone/On/Off. For use on AC mains 200/250 v.



Price £3/19/6 plus 2/- P. & P.

RC2A. Small PRINTED CIRCUIT single valve high gain amplifier for the smaller type of portable. Employs latest type ECL80 valve. Further details on request. Price only 59/6 plus 2/- P. & P.

RC3A. A superior quality 3-valve amplifier employing EZ80, EL84 and ECC83 With separate Bass and Treble controls. Further details on request. Price: £3/19/6 plus 2/6 P. & P.

RC4.A. (STALLION). This is supplied complete with high flux 8in. P.M. Speaker and Baffle. Incorporating three octal type valves 6Q7, 6V6 and 6X5 this robust and well-made unit is ideal for use in the larger type of record player and is equally suitable for use in conjunction with a radio feeder unit. Separate bass and treble controls are provided; also provision is made for an extension speaker and mains supplied to gram. motor. Output approx. 4 watts. Size overall 15in. × 4in. × 9in. high. For use on A.C. mains 100/200/250 v. PRICE £5/19/6 plus 2/6 P. & P. H.P. terms £2/19/6 deposit and four monthly payments of 16/6 per month. Fits our portable cabinet "G" at 85/- without modification.



SPECIAL OFFER TRANSFORMERS AND CHOKES. These are beautifully made, potted transformers and chokes by a well known manufacturer, that will put the "finishing touch" to any equipment with which they are used. All are absolutely brand new.

MAINS TRANSFORMERS:
(A) PRIMARY: 230 v. SECONDARY: 390-0-390 v. 150 mA. 2 v 1.4 amp. 6.3 v. tapped 4.16 v. 9 amp. 4.12 v. 4 amp. 5 v. 2 amp. Size: 5½in. × 4½in. × 5½in. high. PRICE 45/-.
(B) PRIMARY: 110, 200, 230, 250 v. SECONDARY: 350-0-350 v. 130 mA. 2 v. 1.4 amp. 6.3 v. tapped 4.16 v. 9 amp. 4.12 v. 4 amp. 4 v. 2.2 amp. Size: 4½in. × 5½in. × 5½in. high. PRICE 45/-.
(C) PRIMARY: 200, 230, 250 v. SECONDARY: 320-0-320 v. 180 mA. 4 v. 2.2 amp. 4 v. 6.2 amp. Size: 5½in. × 4½in. × 5½in. high. PRICE 20/-.
(D) PRIMARY: 200, 230, 250 v. SECONDARY: 290-0-290 v. 200 mA. 4 v. 2.2 amp. 6.3 v. tapped 4.2 v. 6.2 amp. Size 5½in. × 4½in × 5½in. high. PRICE 35/-.
(E) PRIMARY: 110, 200, 230 250 v. SECONDARY: 330-0-330 v. 100 mA. 4 v. 1.4 amp. 4 v. 6 amp. Size: 4½in. × 3½in. × 5½in. high. PRICE 17/6.
(F) PRIMARY: 200, 220, 230, 250 v. SECONDARY: 6 v. 6 amp. 2 v. 4 amp. 6 v. 3 amp. Size: 3½in. × 4in. × 3½in. PRICE 15/-.

CHOKES:
(G) 40H. 60 mA. Size: 3½in. × 3½in. × 3½in. high PRICE 10/6.
(H) 10H 100 mA. Size: 2½in. × 2½in. × 3½in. high. PRICE 15/-.
(I) 8H 100 mA. Size: 3½in. × 3½in. × 3½in. high. PRICE 12/6.
(J) 6H. 150 mA. Size: 2½in. × 2½in. × 3½in. high. PRICE 10/-.
(K) (Double choke) 3H. 60 mA. 4.5 H. 30 mA. Size: 2½in. × 2½in. × 3½in. high. PRICE 5/-.

OUTPUT TRANSFORMER
(L) PRIMARY: 5K ohm. (suit 6V6 single ended, etc.). SECONDARY: 2.6-3 ohms. Size: 2½in. × 2½in. × 3½in. high. PRICE 10/-.

VALVES. We have perhaps the most up-to-date valve stocks in the trade. A stamp will bring complete list of brand new imported valve types, fully guaranteed. P.T. paid. Also all usual surplus types available such as 6V6GT, etc

CLYNE RADIO LTD.

13, Tottenham Court Road, London W.1
And at
162, Holloway Road, London, N.7.

VALVES

ALPHA

Guaranteed All Tested Before Dispatch.

0Z4	5/6	7C5	8/-	EABC80	10/-	PCF80	13/6
1A3	3/6	7C6	8/-	EAC91	7/6	PCF82	12/6
1A5GT	6/-	7H7	9/-	EAF42	10/6	PCL83	14/6
1A7	12/6	7K7	9/-	EB41	9/-	PL81	15/-
1C3	11/6	7Q7	9/-	EBC41	10/-	PL82	9/6
1C5	12/6	787	9/6	EBF80	10/6	PL83	11/6
10C2	27/10	7Y4	8/6	EC91	9/6	PP225	3/11
1H5GT	10/6	7Y4G	8/-	EC92	9/6	PX25	12/6
1L4	6/6	75	11/6	EC93	9/6	PY80	9/-
1LD5	3/6	77	7/6	EC94	10/-	PY81	9/6
1N5	10/6	80	8/6	EC95	9/6	PY82	8/-
1R5	8/6	807	6/6	EC91	6/-	PY83	10/-
1S4	10/6	8D2	2/9	EF80	12/6	QP21	7/6
1S5	7/6	9D2	2/6	EF83	12/6	QP22	9/-
1T4	7/6	9001	5/6	EH35	10/6	R19	13/6
2X2	4/6	9003	5/6	EH42	10/-	RP220	3/11
3A4	7/-	9004	5/6	EH81	9/-	U801	31/4
3D6	5/-	9006	5/6	ECL80	10/6	U10	10/-
3Q4	9/-	954	2/-	ECL82	13/6	U22	8/-
3Q5	9/6	955	4/9	EF80	8/6	U25	14/-
3S4	8/-	956	3/6	EF37A	12/6	U45	15/-
3V4	9/-	12A6	6/6	EF40	13/6	UAF42	10/6
4D1	3/-	12AH8	11/6	EF41	10/-	UB41	9/6
42	8/-	12AT6	10/6	EF85	10/-	UBC41	9/-
5R4GY	9/6	12AT7	9/-	EF86	13/6	UBF80	9/-
5U4G	8/-	12AU7	7/6	EF89	10/-	UCH42	10/-
5Y3G	8/-	12AX7	8/6	EF92	8/6	UCH81	11/6
5Y3GT	8/-	12BA6	9/-	EL32	5/6	UF41	10/-
5Z4G	10/-	12BE6	10/-	EL41	10/6	UL41	11/-
6A7	13/-	12BH7	11/6	EL42	11/-	UL84	10/6
6A8G	10/-	12C8	7/-	EL84	10/6	UY41	8/6
6AC7	6/6	12H6	3/-	EM34	10/-	UY85	10/6
6AG5	5/6	12J5	4/6	EM80	10/6	VP2B	8/-
6AK5	6/6	12J7G	9/6	EM81	11/6	VR21	2/9
6AL5	6/6	12K7	8/6	EY51	12/6	VR33 (EF39)	6/6
6AM6	9/-	12K8	13/6	EY91	6/-	VR54 (EB34)	2/-
6AQ5	7/6	12Q7	8/6	EZ40	9/-	VR55 (EBC33)	7/6
6AT6	8/6	12SN7	17/6	EZ41	10/-	VR56 (EF36)	6/-
6AU6	10/6	12SC7	2/6	EZ80	8/6	VR57 (EK32)	8/6
6B4	5/-	12SG7	7/6	EZ90	8/-	VR65 (8P61)	3/-
6B8G	4/-	12SH7	5/6	E1148	2/-	VR65A (8P41)	3/-
6BA6	7/6	12SJ7	8/-	GZ32	11/6	VR66 (P61)	3/9
6BE6	8/-	12SK7	9/-	H30	5/-	VR91 (EF50)	4/-
6BJ6	8/-	12SL7	8/-	HL23DD	8/6	VR101 (8YL)	7/-
6BR7	11/6	12SQ7	8/6	HL92	12/6	VR92 (EA50)	1/6
6BW6	8/6	1487	14/6	HN309	13/6	VR105/30	6/6
6BW7	10/-	15D2	7/9	K40N	9/-	VR116	4/-
6C4	7/-	20D1	16/-	KF35	8/6	VR136	6/-
6C9GT	6/6	20P3	20/11	KLL32	8/6	VR137	5/6
6CH6	7/6	20P5	20/11	KT24	4/6	VR150/30	8/-
6D6	5/-	25L6GT	10/-	KT2	5/-	VT501	5/-
6F1	13/6	25Y5G	9/9	KT33C	10/-	VT52 (EL32)	6/6
6F6G	7/6	2574G	9/6	KT55	15/-	VU39 (MU12/14)	8/9
6F6M	7/6	25Z5	10/-	KT66	15/-	VU54 (U12)	9/-
6F10	14/-	10C2	27/10	KTW63	8/6	VU111	2/6
6F33	6/9	10F1	27/10	KTZ41	6/-	W77	8/6
6F15	14/-	20D1	16/-	LP220	5/-	W729	13/6
6G6G	4/6	20L1	27/10	MH4	7/6	X79	11/6
6H6	2/6	20P1	27/-	MH41	7/9	Y63	9/-
6J5G	5/-	6L18	20/11	N78	12/6	Z309	11/6
6J5GT	5/6	FW4/500	10/-	P61	3/6	Z359	11/6
6J5M	6/6	TH2	9/-	P215	3/11	Z759	11/6
6J6	6/-	TH30C	8/-	PEN4	15/-		
6J7G	6/-	TH41	12/6	PEN46	7/-		
6K6GT	7/-	TP25	27/10	PEN220A	4/-		
6K7GT	7/-	U801	31/4	PCC84	10/-		
6K7G	5/-	20P1	27/0				
6K7M	6/9	KT55	15/-				
6K8G	8/6	41MXP	7/-				
6K8GT	9/6	VU120A	3/6				
6L6G	9/-	2C26	2/6				
6L7	7/6	EF55	10/-				
6N7	7/6	25Z6GT	9/6				
6Q7GT	9/-	30F5	12/6				
6SA7GT	8/-	30FL1	12/6				
6SG7	7/6	30P4	21/7				
6SH7	6/-	35L6GT	9/6				
6SJ7	8/6	35W4	8/6				
6SK7	8/6	35Z4GT	8/-				
6SL7	8/-	35Z5	9/-				
6SN7	7/6	50C5	11/6				
6SQ7	9/3	50L6GT	8/6				
6U4GT	14/-	142BT	3/6				
6U5G	8/6	210DDT	4/6				
6U8	8/6	210VPT	3/6				
6U7G	8/6	9002	5/6				
6V6G	7/-	AC6/PEN	6/6				
6V6GT	7/-	ATP4	3/6				
6X4	7/6	DAF96	10/-				
6X5G	7/-	DF96	10/-				
6X5GT	7/-	DH73M	9/-				
6/30L2	12/6	DK96	10/-				
7B7	8/9	DL96	10/-				
		DM70	8/6				

TRANSISTORS — Red Spot 10/- each. Yellow and Green Spots .... 10/- each. Yellow and Red Spots .... 21/- each. White Spot .... 15/- each.

PACKING AND POSTAGE—6d. per valve. **SAME DAY SERVICE.**

LOUDSPEAKER CABINETS



This attractive walnut-finished cabinet is available for 6½in. or 8in. speaker units. Metal speaker fret, complete with back and rubber feet.

6½in. type. Measures 8½in. × 8½in. × 4½in. at base. Price **17/6** each.

8in. type. Measures 10½in. × 10½in. × 5in. at base. Price **21/6** each.

5in. type. Very similar design. Price **16/6** each. Postage, any type, 2/- each.

LOUDSPEAKER UNITS



Make	Type	Size	Price
Elac	Square	3¾in.	19/6 each
Lectrona, Plessey	Round	5in.	17/6 each
Goodmans, Plessey	Round	6½in.	18/6 each
Goodmans, R. & A.	Round	8in.	19/6 each
Plessey, R. & A., Elac	Round	10in.	25/6 each
Plessey	Round	12in.	35/- each
Elac	Elliptical	7in. × 4in.	19/6 each
Elac	Elliptical	10in. × 6in.	25/6 each

All the above are PM units with 2 to 3 ohm speech coils.

RTC 12in. heavy duty 20 watts model 15in. ohms Speech Coil £5 5 0

5in. Mains Energised Speaker £1 0 0

6½in. Mains Energised Speaker 17 6

8in. Mains Energised Speaker £1 1 0

All have field coils of approx. 600 ohms.

SPECIAL OFFER

Just a few 8in. units by Goodmans and Lectrona fitted with standard output transformer ..... £1 1 6 each

MAINS TRANSFORMERS

3 Way Mounting Type.

MT1

Primary: 200-220-240 v. Secondaries: 250-0-250 v. 80 m/A. 0-6.3 v. 4 amp. 0-4 v. 2 amp. Both tapped at 4 v., **21/9** each.

MT2

Primary: 200-220-240 v. Secondaries: 350-0-350 v. 80 m/A 0-6.3 v. 4 amp. 0.5 v. 2 amp. Both tapped at 4 v. **21/9** each.

MT3

Primary: 200-220-240 v. Secondary 20 v. 2 amps. Taps at 3 v., 4 v., 6 v., 8 v., 9 v., 10 v., 15 v., 18 v., 20 v., 24 v., **21/9** each. Postage and Packing please add 2/- per transformer.

ATTRACTIVE CABINETS for 3 valve TRF kit, complete with chassis, dial, backplate, dial drum, pointer, etc., etc. **27/6.** Post paid.

STUDIO 'S' KIT complete with Headphones, Battery, Valve, and all other parts to build this Popular Kit, **45/4.**

TELETRON COMPANION complete kit of parts for this 3 Transistor Pocket Radio. Ferrite Rod, case, etc., **89/6.**

COMPLETE RANGE OF METAL RECTIFIERS. Compare the prices. RM1 **4/6**; RM2 **5/6**; RM3 **7/6**; RM4 **16/-**; RM5 **16/6**; 14A97 **13/-**; 14A86 **13/6**; 14A100 **15/-**.

ISOLATION TRANSFORMERS. Mains input NR20A 2 volt, NR20B 4 volt, NR20C 6.3 v., all with 25% boost. All one price **10/6** each.

Full range of Osmor, Teletron, Wearite, Repanco Coils, Ferrite Rods, Coil Packs, etc. etc. See our catalogue for full details.

Selection of ¼, ½ and 1 watt resistors, all brand new **12/6** per 100. Maroon Twin Twisted flex **6d.** yard. Morse Keys **2/-** ea. 24 v. D.C. Bells **4/6** ea. Full wave rectifiers 12 v. 4 amps. **15/6** each. Pile wound chokes R.F. **1/6** each.

RESISTORS T.S.L. ¼ watt 10% Tolerance. Full range of Preferred Values **6d.** each. Also good selection of ½ watt 1% types **2/6** each. Order forms available on request.

CERAMIC CONDENSERS by Top Manufacturers. Good selection in stock. Price **9d.** each.

AERIALITE LOFT AERIALS 3 element, **27/6**, 5 element **37/6**. Suitable for Channels 8, 9, 10.

We hold large Stocks of **CONTROL KNOBS, BRASS NUTS and BOLTS, TOGGLE SWITCHES, WAVECHANGE SWITCHES, TAG BOARDS and PANELS.** All are listed in full detail in our current Catalogue. Send 1/- in stamps for your copy.

CYLDON "TELETUNER"

All types available, stations of your choice. Fit this Convertor and your troubles are over, **27/7/-.**

Aerials and Oscillator Coils (all channels—all frequencies), **7/6** pair.

Also available from stock, complete range of spares.

CONTROL KNOBS

Long necked knobs for T.V. Receivers in walnut black and cream, **1/-** each.

SUPPRESSORS

Dubilier kits of condensers and chokes for Interference Suppression. 1 amp. kits **5/6**; 2 amp. kits **6/-**; 3 amp. kits **6/6.**

REVISED SECOND EDITION "POINTS ON PICK UPS"

A replacement guide to pick up heads, cartridges, styli. Over 193 illustrations. **5/-** each.

Osmor Coils for Collaro Type Deck Transcriptor.

QT6 Bias Filter coil, each **7/6.**

QT7 Treble Boost coil in Mu metal can, each **£1/7/6.**

QT9 Bias Osc. Coil, each, **7/6.**

Osmor Coils for the Beginners Shortwave Receiver Radio Constructor Aug. 1957. SW Q1 31/11 Mc/s., each **6/-.**

SW Q2 12/4.5 Mc/s., each, **6/-.**

SCRATCHOFF

Removes scratches from Radio and T.V. Cabinets in Polythene Dispenser Tubes, each **3/-.**

A NEW HIGH FIDELITY AMPLIFIER. Type R.C.1. 2 stage. For use with a 3 ohm speaker, A.C. mains, 230-240 v., recommended for use with record players, **£3/19/6.** Post 3/6.

CONTROL KNOBS. Mains on/off and Tone Volume. Complete with 2 valves ready to operate, **£3/19/6** each. Post 3/-.

NYLON DRIVE CORD. Non stretch, **6d.** per yard.

HEAD AND BREAST SETS. A pair of low resistance headphones 120 ohms resistance. A breast microphone with straps etc. Packed in a strong wooden box, **10/6** each. Post 3/-.

FOCUS UNIT. For 14in. or 17in. tubes, vernier adjustment by famous manufacturer. **15/-** each.

W.B. "STENTORIAN" HIGH FIDELITY UNITS. Model H.F.1012. 10in. die-cast unit incorporating 12,000 gauss magnet. Handling capacity 10 watts. Frequency response, 30 c.p.s.—14,000 c.p.s. Bass resonance, 35 c.p.s., **£4/19/9.**

MODELS H.F. 810 and H.F.812. 8in. unit incorporating 10,000 gauss magnet. Handling capacity, 5 watts. Frequency response 50 c.p.s.—12,000 c.p.s. Bass resonance 65 c.p.s. Steel chassis, **£3/2/-.** Die-cast chassis (12,000 gauss), **£4/3/6.**

PAPER BASE RECORDING TAPE. 1,200 ft. reel **12/6.**

CROCODILE CLIPS 3d. each.

TOGGLE SWITCHES 12/- dozen.

4 B.A. TERMINAL STRIPS for battery

ALPHA

RADIO SUPPLY CO.

103, LEEDS TERRACE, WINTOUN STREET, LEEDS, 7.

OUR 1957-1958 CATALOGUE IS NOW AVAILABLE TO ALL READERS OF THIS MAGAZINE. 48 PAGES OF COMPONENTS AND EQUIPMENT OF INTEREST TO ALL RADIO ENTHUSIASTS. SEND 1/- IN STAMPS FOR YOUR COPY.

TERMS: Cash with order or C.O.D. Postage and Packing charges extra, as follows: Orders value 10/- add 1/-; 20/- add 1/6; 40/- add 2/-; £5 add 3/- unless otherwise stated. Minimum C.O.D. fee and postage 3/-.

For full terms of business see inside cover of our catalogue.

Personal Shoppers 9 a.m. to 5 p.m. Mon. to Friday. Saturday 10 a.m. to 1 p.m.

HEADPHONES—MICROPHONES

EX-GOVERNMENT HEADPHONES AND MICROPHONES

CLR low resistance type 120 ohms ..... 7/6 pair
Throat Microphones, American surplus. Complete with strap, lead and plug type 2208 ..... 3/- set
High Resistance Phones, 4,000 ohms .... 13/6 pair
High Resistance DLR Phones ..... 16/- pair

TRANSISTORS

Suitable for audio work yellow and green spot, ea. 10/-
red spot, ea. 10/-
R.F. for use up to 1.5 mc/s. white spot ea. 15/-
R.F. for use up to 1.5 mc/s. to 8 mc/s. yellow and red spot, ea. 21/-
JB gang condensers for transistor working " 0 " gang 1 or 2 gang 365 PF swing, aluminium vanes, steel chassis.
1 gang 7/6 each; 2 gang 11/6 each. JB " 60 " twin gang condenser 208 PF front section 17/6; PF rear section price 9/6 each.

HEATER TRANSFORMERS Each

230 v. Input 2 volt .5 amp.	5/-
230 v. Input 2 volt 3.0 amp.	8/3
230 v. Input 4 volt 1.5 amp.	5/6
230 v. Input 4 volt 3.0 amp.	10/-
230 v. Input 5 volt 2.0 amp.	10/-
230 v. Input 6.3 volt .5 amp.	5/6
230 v. Input 6.3 volt 1.5 amp.	6/9
230 v. Input 6.3 volt 3.0 amp.	10/-
230 v. Input 12 volt .75 amp.	5/9

METERS

Instrument Meter Moving Coil ex-Ministry 0-3 kV. Round Panel mounting. Brand new 7/6 each.
Instrument Meter 0-100 m/A. Square type. Panel Mounting. Ex-R.A.F. Equipment 7/6 each.
2 Range Pocket Voltmeter. Ex Ministry Brand New. 0-15 volts, 0-250 volts, moving coil 345 ohms per volt, complete with leads 18/- each.

CO-AXIAL CABLE Solid 75/80 ohms, 6d. yd.

CO-AXIAL CABLE Semi Airspaced 5/870 ohms., 9d. yard.

RIBBON FEEDER 300 ohms 6d. yard.

APEX CROSSOVER BOX. Shrouded 7/6 each

AERIALITE CO-AXIAL PLUGS 1/4 each

AERIALITE CO-AXIAL SOCKETS 11d. each.

AERIALITE BACK TO BACK SOCKETS 1/6 each.

OSMOR BAND I FILTER. 10/- each.

MINIATURE I.F. TRANSFORMERS 465 Kcs., 8/- pair.

RCA 50 OHMS WIRE WOUND PRE-SET VAR. CONTROL. 2/- each.

Full range of **CARBON CONTROLS,** Med spindle length, all values, 1/3 each.

COLLARO STUDIO " 0 " CARTRIDGE. 22/6 each.

BULGIN MAINS 2 PIN PLUG AND SOCKET, 2/6 each.

STENTORIAN LOUDSPEAKERS. New Miniature Models for use with Transistor Amplifiers, etc., etc. 8.1.75. Diameter 1¾in. Total depth 1in. 3 ohms impedance 26/9 each.
3–2 x 3 Elliptical Speaker. Size 2⅞in. x 1⅝in. Depth 1¼in. 32/- each.

BULGIN TYPE P322 ANODE CAP. Insulated for high voltage, 6d. each.

TERMINAL BLOCK. Ref. No. 5X/2234. 20-way. 6 yards Top Quality Maroon Flex, 2in. core twisted with 2in. pin plug, 2/9.

MARCONI DROPPER, resistance 1,000 ohms, 3 voltage taps 195/215, 216/235 236/255, 1/- each.

CROCODILE CLIPS, plated strong jaws 3d. each.

TOGGLE SWITCHES, various assorted, 12/- dozen.

4 B.A. TERMINALS, red and black. Suitable for battery chargers, etc., 1/6 each.

BIB RECORDING TAPE SPLICER. Invaluable to all tape recording enthusiasts. Precision made Razor Cutter included. Saves tape, pays for itself in a short time. Mends broken tapes quickly and neatly. Tapes edited easily. 18/6 each.

CHASSIS. Aluminium undrilled with reinforced corner. Available in the following sizes:

6 × 4 × 2in.	4/6 each
8 × 6 × 2in.	6/3 each
10 × 7 × 2in.	7/3 each
12 × 3 × 2in.	5/9 each
12 × 5 × 2in.	6/9 each
12 × 8 × 2in.	8/6 each
14 × 3 × 2in.	6/- each
14 × 9 × 2in.	12/- each
16 × 6 × 2in.	8/6 each
16 × 10 × 2in.	14/- each

All are four-sided—ideal for radio receivers—amplifiers—power packs, etc.

THE NEW APEX MARK II BAND III CONVERTER. ★ B.B.C. or Commercial Programmes at the touch of a switch. ★ Built in power supply for 200/250 v. A.C. ★ Variable fine tuner and gain control. Separate mains on/off switch. ★ Robust construction for mounting on top or side of cabinet. ★ Size only 5½ × 5½ × 2½in. Retail price £5/15/- complete.

PRE-SET CONTROLS. Available wire wound 1K and 10K ohms, 2K ohms, 30K ohms. Available carbon track 50K, 100K, ½ Meg., 1 Meg., 2 Meg., 20K ohms. ½ Meg. ohms. Various makes and types. 150K ohms. All one price. 1/9 each.

TINNED COPPER WIRE—All 4 oz. Reels.

16 S.W.G. ..	2/6	24 S.W.G. ..	3/-
18 S.W.G. ..	2/7	26 S.W.G. ..	3/3
20 S.W.G. ..	2/9	28 S.W.G. ..	3/5
22 S.W.G. ..	2/10	30 S.W.G. ..	3/9

ENAMELLED COPPER WIRE—All 4 oz. Reels.

18 S.W.G. ..	2/6	30 S.W.G. ..	3/3
20 S.W.G. ..	2/8	32 S.W.G. ..	3/7
22 S.W.G. ..	2/9	34 S.W.G. ..	3/9
24 S.W.G. ..	2/11	36 S.W.G. ..	3/11
26 S.W.G. ..	3/-	38 S.W.G. ..	4/3
28 S.W.G. ..	3/1	40 S.W.G. ..	4/7

MIDGET BATTERY ELIMINATOR. Actually smaller than the H.T. Battery alone. Complete eliminator. No batteries needed at all. Mains Switch included in lead. Transformer double insulated. L.T. supply stabilised. It is most important that the unit should be used only with LOW CONSUMPTION receivers. (Valves DK96, DL96, etc.) Specification: Mains input 220/240 v. 50 c.p.s. A.C. H.T. Output 85 v. 10 m/a. L.T. output 1.3 v. 125 m.a. Transformer double insulated. Metal case finished " Hammertone " enamel. Supplied complete with mains on/off switch. Price £2/12/6.

" NORMAN " SILICONE COATED WIRE WOUND RESISTORS. Tolerance plus or minus 10%. Each resistor clearly marked with resistance value and wattage. Available in the following values: 24, 50, 68, 100, 150, 200, 250, 350, 500, 680, 1,000, 1,500, 2,000, 2,500, 3,500, 5,000, 6,800, 10,000. Also 220 ohms. 5 watt size ⅝ × 1¾in. with 1½in. wires, 1/-. 10 watt size 1¼ × 3in. with 1½in. wires, 1/3. 15 watt size 1¾ × 3in. with 1½in. wires, 1/9.

COIL FORMERS. Aladin Coil Formers, ¾in., complete with iron dust cores, 8d. each. Aladin Coil Formers, ½in., complete with iron dust cores, 7d. each. Ceramic Coil Formers, ¾in. dia., 1in. long, 4 ribs, 4d. each. Paxolin Coil Formers, ¾in. dia., 2¾in. long. Removed from R.A.F. equipment and are in some cases complete with trimmers. 3d. each. Spare Iron Dust Cores, for ½in. and ¾in. formers, 3d. each.

MAINS DROPPING RESISTORS. Norman Silicone coated, .1 amp., 2,000 ohms, 4/6 each. Norman Silicone Coated, .15 amp., 1,500 ohms, 4/6 each. Norman Silicone coated, .2 amp., 1,000 ohms, 4/6 each. Norman Silicone coated, .3 amp., 1,000 ohms, 4/6 each. Testgear Cat. No. 1,084A. .3 amp., 650 ohms, 4/6 each. Testgear, Cat. No. 1084B. .2 amp., 800 ohms, 4/6 each.

RECORD PLAYER UNITS

B-S-R. MONARCH

Four speed automatic record change unit. Plays 7in., 10in. and 12in. records automatically with " MAGIDISK " Selector Turn-over Pick-up. Unit plate 12¼ × 10¼in. £8/15/-.

COLLARO

Model 3/544. Three speed single player. Automatic stop, fitted with " Studio T " Pick-up. Cream finish £6/19/6. Carriage on above units 4/6.

COLLARO

Four speed automatic record change unit. A fully mixing automatic changer with many advanced features. Unit plate 12in. × 13¼in. £9/15/-.

SPECIAL PURCHASE

8in. P.M. Speaker Units with Output Transformer removed from equipment. 11/6 each.



A NEW and UP-TO-DATE T.R.F. KIT
★ **BRAND NEW COMPONENTS**
★ **3 VALVES—6K7, 6J7, 6V6**
★ **CONTACT COOLED RECTIFIER.**
★ **PM SPEAKER.**
★ **AC MAINS FULLY ISOLATED.**

Circuit Diagram and Full Shopping List, 1/-. Complete Kit down to last nut and bolt, £5/10/- each. Carriage and packing 3/-.

LATEST ADDITIONS TO OUR RANGE OF CONTROL KNOBS

Pekalit Type 4000. Brown with gilded centre plate, dia. 1⅛in. .. 1/6 each
Pekalit Type 4010. Brown or cream with gilded centre plate, dia. 1¼in. .. 1/6 each
Pekalit Type 5511. Brown with gold circle on face, dia 1¼in. .. 1/6 each
Pekalit Type 5501. Brown with gold circle on face, dia. 1in. .... 1/4 each

KNOBS—BAKELITE
Large Purchase—Good Quality

Type JK1. Cream, 1¼in. diameter, spring fixing, fluted grip.
Type JK2. Brown, 1¼in. diameter spring fixing, fluted grip.
Type JK3. Brown, 1¼in. diameter, spring fixing, plain grip. (This one has white ring on knob face).
All have a small finger flange to avoid marking cabinets.

★ OFFERED AT A FRACTION OF ORIGINAL COST ★

Price 6d. each—5/- doz. any types.
1¼ Knobs (brown), fluted grip.
Grub screw fixing ..... 6d. each

THE " OSMOR " JIFFY PUNCH

	Hole Size	Retail Price Complete
TYPE 1	1in. × 1½in.	19/6
TYPE 2	⅝in. × 1½in.	18/9
TYPE 3	⅜in. × 1½in.	22/6
TYPE 4	1½in. × 2in.	31/6

Postage and packing 1/-. Any type.
TOMMY BARS 1/3 each.
Allen Key for Type 2 only 2/6.
For B7G and Octal No. 2. For B9A and B8A No. 3.

THE " OSMOR " CHASSIS CUTTER

	Hole Size	Retail Price Complete
TYPE 1	1in. × 1½in.	19/6
TYPE 2	⅝in. × 1½in.	18/9
TYPE 3	⅜in. × 1½in.	22/6
TYPE 4	1½in. × 2in.	31/6

Postage and packing 1/-. Any type.
TOMMY BARS 1/3 each.
Allen Key for Type 2 only 2/6.
For B7G and Octal No. 2. For B9A and B8A No. 3.

BIB. WIRE STRIPPERS AND CUTTERS The new three-in-one tool which electricians, radio and television engineers and handymen have always wanted. Strips insulation without " nicking " wire. Cuts wire without leaving rough edges. Splits extruded flex. Adjustable by a turn of a screw to most wire and cable thicknesses. Nickel plated, 3/6 each.

MAINS NEON TESTERS
With screwdriver ends, plastic body, 4/- each.

PUBLICATIONS

No. 134—F.M. TUNER CONSTRUCTION, By W. J. May. ★ Easy to Build, Point to Point Wiring ★ Super High Fidelity Response ★ 32 Pages ★ All Components for this Circuit available ex stock. 2/6 each.

No. 138—HOW TO MAKE AERIALS FOR TV (Band 1 and 3) and V.H.F. (Band 2). Data for all Channels. Ten different designs for local and fringe areas. 2/6 each.

No. 100—A COMPREHENSIVE VALVE GUIDE, Book No. 1. 5/- each.

No. 121—A COMPREHENSIVE VALVE GUIDE, Book No. 2. (Characteristics and Base Connections.) 5/- each.

No. 103—RADIOFOLDER " A." The Master Colour Code Index for Radio and Television. 1/6 each.

No. 128—PRACTICAL TRANSISTORS AND TRANSISTOR CIRCUITS. ★ How to Make Your Own Transistors ★ 48 Pages. 3/6 each.

No. 143—A COMPREHENSIVE VALVE GUIDE, Book No. 3. ★ International Edition ★ 1,200 Valves not previously listed are presented. 5/- each.

No. 144—VALVE AND TELEVISION TUBE EQUIVALENTS. ★ Receiving ★ Transmitting ★ Industrial. 5/- each.

No. 140—TELEVISION SERVICING FOR BEGINNERS. ★ 40 Pages of information. 4/6 each.

No. 142—MODERN TV CIRCUITS AND FAULT FINDING GUIDE. ★ Many interesting Circuits included. 4/6 each.

No. 133—RADIO CONTROLLED MODELS FOR AMATEURS. ★ Boats ★ Aircraft ★ Circuits, etc. 5/- each.

MULLARD—HIGH QUALITY SOUND REPRODUCTION. Includes 20 watt Amplifier, F.M. Tuner. Pre Amplifiers, etc. 3/6 each.

G.E.C.—F.M. PLUS TUNER. For the " Nine One Two Plus " 2/6 each.

G.E.C.—" NINE ONE TWO PLUS." Details of High Quality Amplifier for the Home Constructor. 4/- each.

Reprint No. 1—THE INEXPENSIVE CAR RADIO RECEIVER. ★ A Cheap and Efficient Car Radio. 1/6 each.

Reprint No. 2—FREQUENCY MODULATION TUNER UNITS. ★ Fringe and Local Area Reception. 2/- each.

Reprint No. 3—THE ARGONAUT AM/FM MW/VHF TUNER RECEIVER. 2/- each.

Reprint No. 4—THE " EAVESDROPPER." A Miniature Transistor Receiver for local station reception. 1/6 each.

Reprint No. 5—TV FAULT FINDING. Profusely illustrated with Photographs taken from a Televisor Screen. 5/- each.

Reprint No. 6—THE RADIO AMATEUR OPERATOR'S HANDBOOK. Essential to the Short Wave Enthusiast. 3/- each.

Reprint No. 7—RECEIVERS, PRE-SELECTORS AND CONVERTORS. Many interesting Circuits for all. 2/6 each.

Reprint No. 8—TAPE AND WIRE RECORDING. Contains principles of Tape and Wire Recording—complete constructional details of the Paragon Tape Recorder, etc., etc. 3/- each.

Reprint No. 9—RADIO CONTROL FOR MODEL SHIPS, BOATS AND AIRCRAFT. A Comprehensive Work on this fascinating subject. 8/6 each.

Reprint No. 10—RADIO CONTROL MECHANISMS. A Really Useful Book. 4/6 each. Please include 4d. post single copies.

LOUDSPEAKERS by G. A. Briggs. The Why and How of good reproduction. " Sound " information for the layman and the enthusiast. 7/6 each.
Wearite Manual of the Tape Deck. 3/6 each.

See opposite page for our terms.

ALPHA RADIO SUPPLY CO., 103, LEEDS TERRACE, WINTOUN ST., LEEDS, 7

F.M. RECEIVER ARR.3

Frequency: 60 Mc/s. Requires only a simple conversion to B.B.C. F.M. Transmissions.

Valve Line up: 1st RF 12SG7. 2nd RF 12SG7. Mixer 12SG7. Osc 12SG7. 1st IF Amp 12SG7. 2nd IF Amp 12SG7. Limiter 12SG7 Det 12H6. 1st AF Amp. 12SQ7. O/P 12A6. 2—12SH7's AFC. Magic Eye 12U5G.

£6.0.0

Plus 7/6 Packing and Carriage

SIGNAL GENERATOR 600—1200 Mc/s.

Test Set 281, Ref: 10SB/6152. Operates from 230 volt 50 cycle Mains. In case 14in. × 14in. × 12in. Fitted 11in. Dia Parabolic Aerial and Perspex Ra lome. 2.CV.90 (Mazda Osram E.1368). Oscillator in Precision Cavity. Modulator and 6X5 Rectifier.

Suitable for 23 Centimetres and Latest B.B.C. Television 654 Mc/s. EF.5) Band. Direct Dial reading Wide Band.

Brand New **£22.10.0**

Carriage Paid

SIGNAL GENERATOR TYPE 52A.

Frequency: 6 to 52 Mc/s. Internal Power Pack 230 volt 50 c/s. or 80 volts 200 c/s.

Brand new condition with 4 calibration charts in transit case, with leads and accessories.

£10.0.0

Plus 10/- Packing and Carriage

TRANSMITTER/RECEIVER No. 19. Mk.II

Frequency coverage 2 to 8 mc/s. for R/T. MCW. CW. Superhet Receiver 465 kc/s. I.F.'s BFO etc. Receiver line-up: 6K7 RF; 6K8 Mixer; Two 6K7 I.F.'s; 6B8 Det. Transmitter line-up: 6K8 Mixer; VFO EF50 buffer; ADC EB34; 807 P/A. This unit incorporates a TX/RX 229 at 241 mc/s. with a local range of 1 mile.

Valve line up: CV6. Two 6K7's and 6V6. Also intercom. set two valve AF amplifier 6K7 and 6V6.

As new condition and American manufacture.

Fully valved **£3.5.0**

Plus 10/- Packing and Postage

RECEIVER UNIT EX. 1143a



Suitable for conversion to 2 Metres or FM Wrotham transmissions. Valve line-up: Four EF.50's; One EL.32; Two EF.39's; One EBC.33; One EA.50.

Circuit diagram supplied with each unit. Fully valved. **£1.5.0**

Plus 3/6 Postage

WALKIE TALKIE TRANSMITTER/RECEIVER TYPE 38

Frequency 7.4 to 9 Mc/s, valve with four VP.23's and one ATP.4. Brand new and complete with two pairs of earphones, two throat microphones, whip aerial, junction box and canvas satchel **£3.5.0**

Plus 5/- Packing and Postage

'S' BAND PRECISION WAVEMETER



2900 to 3150 Mc/s. TEST SET 288 A.M. Ref. 10SB/6161.

Comprising exceptionally rugged silver-plated Wavemeter Type 1665, resiliently mounted and directly tuned by 7¼in. dia. calibrated micrometer with 6¼in. thimble scale. Temperature correction for micrometer attached. Resonance indicated on 100 microamp meter. Equally suitable for laboratory using milliwatt powers or, with loose coupling, for high powers. UR2 connecting cable and coupling probe supplied. Brand new in robust moisture-proof case with jacking-off screws and tool. **£15.0.0**

Plus £1 Packing and Carriage

AN/APN.1. TRANSMITTER/RECEIVER

Frequency approx. 400-485 mc/s.

R.F. TRANSMITTER. Operating 67.42 cm. (445 mc/s.) with a band width of 40 mc/s. Modulation of its carrier is by means of a moving coil Transducer.

Two 955 (VT.121) valves; quickly converted for Radio control and 70 cm.

RECEIVER. Tuned to the Transmitting frequency. Two 9004 valves.

A.F. AMPLIFIER. An audio frequency amplifier R/C coupled, using Two 12SH7's and One 12S17 valves.

The AN/APN.1. has a vast amount of useful components including; 3 Relays one being a 4 pole change over type 3 off 1 megohm. 1 per cent Resistors (wire wound), Potentiometers dynamotor and the following valves; 3 12SH7's; 1 12SJ7; 1 VR, 150/30 (OD.3) and 2 12H6's making a total of 14 valves in all.

Brand New **£1.10.0**

Plus 7/6 Packing and Carriage

RECEIVER TYPE R.1392



Frequency 95-150 Mc/s (2-3 Metres). Air Tested 15 Valve Superhet. Valve Line-up; 1st and 2nd R.F. Amp. VR.136 (EF54); 1st Local. Oscillator V.R.65 (SP61); 2 Oscillator Multipliers V.R.136 (EF54); 3 I.F. Amp. V.R.53 (E.F.39); AGC. 6Q.7. Output 6J5; Muting V.R.92 (EA.50); Noise Limiter V.R.92 (EA.50); B.F.O. 6J7; Mixer V.R.136 (EF.54); De Mod. 6Q7. Normally Crystal Controlled but can be tuned over 95 to 150 Mc/s. Power supply required; 240-250 volts at 80 mA. 6.3 volts at 4 amps. Size 19 × 10in. × 10in. Standard Rack Mounting. **£6.19.6**

Complete with valves and circuit diagram ..... *Packing and Carriage 10/- extra*

TANNOY SPEAKERS

External 8-watt unit 7½-ohm impedance complete with matching transformer.

New **£1.0.0**

Plus 3/6 Packing and Carriage

MULTI-RANGE TEST METER

Ranges: 0-1.5 and 0-30 volts; 0-60 milliamps; 0-500 and 0-5,000 ohms. Ranges can be easily extended. Readings are obtained quickly and easily on a very open scale. Size: 2½ × 3¾ × 3¾ in.

Brand new with carrying strap ..... **8s. 6d.**

Plus 1/6 Post and Packing

TRANSFORMERS

HEATER TRANSFORMERS

6.3 volt, 1½ amps.; brand new, 6/6, plus 1/- p.p.

SMALL MAINS TRANSFORMERS

Input 230 volt 50 cycles, output 250 volt 40 mA., 6.3 volt 1.5 amp. Size 3.9in. × 2.4in. × 2in. Ideal for TV converters. Price 12/6 each, plus 1/- p.p.

CHARGER TRANSFORMERS

For 6 or 12 volt; 230 volt 50 cycles input, 9 and 17 volt 3 amp. output. Price 15/6 each, plus 1/- p.p.

GYRO UNIT AND INVERTER

Inverter: 12 volt d.c. input 3-phase 190 cycle output. (These inverters can be used successfully as 12 volt d.c. Motors for Models.)

Gyro Unit: Operates on 3-phase output from Inverter. Peak speed 11,400 r.p.m. Caged. Precision made equipment.

These units are ideal for experimenting and demonstration purposes. Size: Inverter 4 × 4 × 3in.; Gyro 4in. dia. incl. cage. **12s. 6d.** per pair

Plus 3/- Post and Packing

MAINS POWER UNITS. TYPE 234

Double smoothed 200 to 250 v. 50 cycle input. Output: 200 or 250 volts at 100 m/A 6.3 volts at 6 amps. Voltmeter reading input and output voltages. Size: 19in. × 10in. × 6¼in. Standard Rack Mounting. **£4.10.0**

Plus 10/- Packing and Carriage

NOTE: Carriage prices quoted apply only to England and Wales.

PROOPS BROS. LTD.

Head Office: Telephone: LANgham 0141

Mail order enquiries: Telephone: EUSton 8812

DEPT. 'W', 52 TOTTENHAM COURT ROAD, LONDON, W.1

Shop hours 9 a.m. to 6 p.m.—Thurs: 9 a.m. to 1 p.m.

OPEN ALL DAY SATURDAY

Call at PROOPS for personal attention & satisfaction

WALK AROUND AND INSPECT THE THOUSANDS OF ITEMS WHICH ARE NOT SHOWN IN OUR ADVERTISEMENTS!

DESYNN TYPE ANTENNA
or Beam position indication system

This comprises a transmitter unit and Indicator which will operate on 12 or 24 volts D.C. and will indicate with instantaneous and smooth pointer movement. The Transmitter is a specially designed potentiometer and will operate the receiver on a simple three-wire system and the receiver in this instance is calibrated in gallons but dial could be easily altered to indicate a 360 deg. sweep. Transmitter and receiver with full instructions ..... **12s. 6d.**
Plus 2/- Packing and Carriage

MAINS CHANGING TRANSFORMER

(Admiralty Pattern) 230/100-110-130V. Separate primary and secondary with earthed screen winding between. Totally enclosed in 7 in. × 6in. × 8in. black steel case with detachable lid exposing terminal block and tapping link. Secondary very conservatively rated at 0.44 amps. (core size 3 sq. in.). Tested to 2,000V. Weight 19 lb.
Each **£1.0.0**
Including Postage and Packing

PETROL ELECTRIC CHARGING SET

12/18 volts, 80 watt. Ideal battery charging unit or for Field Days. Size: 14½in. × 7½in. Weight 46lb.
Brand New, with complete set of running spares and Canvas cover.
£11.10.0
Plus 10/- Packing and Carriage

BINOCULAR TYPE INFRA RED VIEWING EQUIPMENT

Complete with EHT supply operating from 6 or 12 volt D.C. Originally designed for night driving. Complete with cleaning fluids and canvas carrying cases.
Packed in transit cases **£3.10.0**
Carriage 7/6

ROOM THERMOSTATS

Made by well-known manufacturer. 15 amp, 0/250 V, a.c. Temperature range 50° to 80°F. Brand new, in cream finish, with installation instructions ..... **15s. 0d.**
Plus 2/- Packing and Carriage



AN/APN.1 TRANSDUCER

This Unit consists of Magnet and Coil which is attached to an aluminium diaphragm suspended freely and perforated to prevent air damping. Mounted on a Ceramic cover which sits over the diaphragm is a form of 2-gang capacitor which has a swing from 10-50 pF.
The above unit is used as part of Wobbulator described on page 252 of the June 1956 "Wireless World." **7s. 6d.**
Post Paid

RECEIVER TYPE R.1132A



Frequency 100-120 Mc/s. 11 Valve Superhet. Valve line-up: RF. Amp. VR.65; Frequency Changer VR.65; Local Oscillator VR.66; Stabilizer VS.70; I.F. Amplifiers V.R. 53's; B.F.O. V.R.53; Detector V.R.54; A.F. Amplifier V.R.57; Output V.R.37 (6J5). Switchable A.V.C. and A.G.C. Variable B.F.O. Circuit diagram supplied with each unit. Easily converted to receive Wrotham band with no alteration to wiring. Conversion instructions available to each purchaser. Size 19in. × 10in. × 10in.
Standard Rack Mounting **£3.7.6**
Packing and Carriage 10/- extra

RADIO ALTIMETER

5mA panel mounting meter, 3in. dia., 8in. circular scale. Large magnet. Scale easily removable, leaving finished faceplate for recalibration. Basis for sensitive portable multimeter. Brand New. Boxed. **7s. 6d.**
Post Free



The TS184 A/AP

Real 70 cm. Test Gear, brand new in carrying case for only

£5.10.0
Carriage Paid

Portable Precision for Mobile Hams, Amateur T.V., and those monitoring the latest U.H.F. allocations. RESONANT CAVITY WAVEMETER, calibrated 400-430 Mc/s. Tuning stops adjustable to any 30 Mc/s band within the 400 to 470 Mc/s coverage. Calibrated scale rack and pinion drive piston input attenuator—and alternative fixed coupling loop input provides facilities for use as a signal generator. Plug-in "Telescopic Probe Antenna." 6J6 detector and Monitor amplifier, 2-600 ohm phone jacks for modulated signals. Panel output terminals for metering 6J6 output current. Power required 6 volt at 300 m/A and 30 volts at 0.5 m/A.

24-page booklet supplied with each unit giving comprehensive circuit descriptions, diagrams and suggested modifications Etc.



ANTENNA RELAY UNIT

U.S. manufacture, containing change-over relay, 2½in. panel mounting meter (measuring aerial current) with separate thermocouple. Meter movement 2 mA. basic contained in metal case 3½ × 4½ × 3½in. with ceramic stand off terminals.
12s. 6d.
Post Paid

RECTIFIERS

12 Volt 4-amp Full Wave.
Price ..... **12s. 6d.**
Plus 1/6 Packing and Carriage

MORSE KEYS

Size 3½in. × 1½in.
Price ..... **2s. 6d.**
Post Paid

I.F. AMPLIFIER UNIT

460 kc/s. with IT4. Brand New and Boxed. Fully Screened in plug-in Box. Size 2½in. × 1in. × 4½in. With circuit
10s. 0d.
Plus 1/- Postage and Packing

THROAT MICROPHONES TS.30.

Including socket ..... **3s. 0d.**
Post Paid

CRYSTAL MIKE INSERTS Each ..... **4s. 6d.**
Post Paid

ELECTRIC TIME SWITCH

Beautifully made clockwork mechanism automatically wound by 6 volt Solenoid. The time switch can be set for any period between 30 minutes and 44 days. This robust unit is housed in strong Bakelite case 4in. in diameter **12s. 6d.**
Post Paid





MULLARD "3—3" QUALITY AMPLIFIER

An ideal companion unit to the JASON Tuner. A really first-class 3-valve 3-watt Amplifier giving Hi-Fi quality at a reasonable cost. Mullard's latest circuit. Valve line-up: EF86, EL84, EZ80. H/duty mains trans. giving extra HT and LT for Tuner Unit addition.

Variable treble cut and bass boost controls. sensitivity 100 MV for 3-watt output. Frequency response + or − 1db, 40 c/s to 25 kc/s.

Complete amplifier wired and tested with quality sectionalised output transformer to Mullard specification (less speaker) Carr. and ins. 4/6. **£8.8.0**

Wired Power O/Put Socket with Additional Smoothing 10/6 extra.

JASON F.M. TUNER UNIT 87-105 mc/s



F.M. TUNER-UNIT (87 mc/s—105 mc/s) by Jason. As described in Radio Constructor. Designer Approved Kit of parts to build this modern highly successful unit, drilled chassis and superior type dial as illustrated. Coils, cans and all quality components, etc. for only 5 gns., post free. Set of 4 spec. EF91 or equiv. valves 30/-, post free. Illustrated handbook with full details, 2/-, post free. Free with Kit 48-hr. Alignment Service 7/6 and 2/- p.& p.

ELECTROLYTICS ALL TYPES NEW STOCK

TUBULAR		CAN TYPES	
25/25v., 50/12v.	1/9	8+8/450 v...	4/6
50/50 v.4/500v.	2/-	8+16/450 v...	5/-
100/250 v.....	1/9	8+16/500 v..	5/6
8/450 v.....	2/3	16+16/450 v.	5/6
8/500 v.....	2/9	16+16/500 v.	6/-
8+8/500 v...	4/6	16+16+8/350v.	5/6
8+16/450 v...	5/-	32+32/350 v.	5/6
16/450 v....	3/6	32+32/275 v.	4/6
16+16/450 v.	5/6	50+50/350 v.	6/6
32/350 v.....	4/-	60/350 v.....	6/6
32/500 v.....	5/-	60+250/275v.	12/6
32+32/350 v.	5/6	64+120/275v.	11/6
32+32/450 v.	6/6	100+200/275v	12/6
		100/270 v.....	6/6

MIDGET TRANSISTOR TYPES. 2μF, 4μF, 8μF, 6V, 3/6; 6μF, 10μF, 16μF, 8V., 3/6; 32μF, 1½V., 3/6.

CONDENSERS.—Mica, Silver Mica. All pref. values. 5 pf. to 1,000 pf., 6d. each. Ditto ceramics 9d. each. Tubulars, 440 v. Hunts and T.C.C. .001 mfd.-.01 and .1/350 v., 9d. each. .02-1/500 v., 1/- each. .25 Hunts, 1/6. .5 Hunts, 1/9. .001 mfd. 6kv., 5/6. .001 mfd. 20kv., 9/6.

CLOSE TOLERANCE CONDENSERS S/Mica. 10% Type, 5pf.—500 pf., each 1/-; 600 pf.—5,000 pf., each 1/3. 1% Type, 1.5 pf.—50 pf. (Tol. 1 pf.), 1/9; 56 pf.—500 pf., each 1/9; 575 pf.—5,000 pf., each 2/-.

RESISTORS.—Pref. val. 10 ohms 10M ohms.

CARBON		WIRE-WOUND	
20% Type, ½ w.,	3d.;	5 w., 25 ohms—	1/3
¼ w., 5d.; ½ w.,	6d.;	10 w., 10,000 ohms	1/6
1 w., 9d.		15 w., ohms	2/-
10% Type, ¼ w.,	9d.;	5 w., 15,000—	1/9
½ w., 1/-; 1 w.,	1/6	33,000 ohms	
5% Type, ¼ w.,	1/-;	10 w., ohms	2/3
1% Hi-Stab., ½ w.,	2/-		

WIRE-WOUND POTS

Pre-set Min. T.V. Type Knurled Slotted Knob. All values 25 ohms to 50 K., 2/- ea. 50 K. 4/-. Ditto, Carbon Track, 50 K., to 2 Meg., 3/-.

3 w. LAB. COLVERN, etc. Standard Size Pots 2½in. Spindle. High Grade. All Values. 100 ohms to 50 K., 5/6; 100 K., 6/6. **W/W EXT. SPEAKER CONTROL,** 10Ω., 3/-.

SCOTCH BOY, EMITAPE, etc., 1,200ft. 27/-. Long playing, 1,800ft. reels, 45/-. Reels only. 3in. 3/-, 5in. 3/6, 7in. 4/3.

SENTERCEL RECTIFIERS. B.H.T. Type, Fly-Back Voltages. K3/25 2 kV., 3/-; K3/40 3.3 kV. 6/9; K3/45 3.6 kV. 7/3; K3/50 4 kV., 7/9; K3/100 8 kV. 13/6, etc. **MAINS TYPES.**—RM1 125 v. 60 mA., 4/9; RM2 125 v. 100 mA. 5/6; RM3 125 v. 120 mA., 7/6; RM4 250 v. 250 mA., 16/-; RM4B type 270 mA. 17/6; RM5 250 v. 300 mA., 21/-.

SPEAKER FRET.—Expanded Bronze anodised metal 8×8in., 2/3; 12×8in., 3/-; 12×12in. 4/6; 12×16in., 6/-; 24×12in., 9/-, etc. Any preferred size cut.

TYGAN FRET (Murphy pattern). 12in.×12in., 2/-; 12×18in., 3/-; 12×24in., 4/-, etc.

NEW BOXED VALVES ALL GUARANTEED

1R5,1T4	7/6	EABC80	9/6	EZ80	8/6
185, 1S4	7/6	EB91	6/6	MU14	9/6
3S4 3V4	8/-	EBC41	9/6	PCC84	10/6
5Z4	9/6	ECC83	10/6	PCF80	10/6
6AT6	8/6	ECC84	12/6	PCF82	10/6
6K7	6/6	ECF80	12/6	PCL83	12/6
6K8	8/6	ECF82	12/6	PL82	10/-
6Q7	8/6	ECH42	10/6	PL83	11/6
6SN7	8/6	ECH81	10/6	PY80	9/6
6V6	7/6	ECL80	10/6	PY81	9/6
6X4	7/6	EF41	10/6	PY82	8/6
6X5	7/6	EF80	10/6	PY83	10/6
7C5	9/-	EF86	12/6	U22	8/6
7Y4	8/6	EF91	8/6	UBC41	9/6
DAF96	9/-	EM85	11/6	UCH42	10/6
DF96	9/-	EL41	10/6	UF41	10/-
DK96	9/-	EL84	11/6	UL41	10/6
DL96	9/-	EY51	10/6	UY41	8/6
35L6	10/6	EZ40	8/6		

SPECIAL PRICE PER SET

1R5, 1T4, 185, 1S4 or 3S4 or 3V4 27/6
DK96, DF96, DAF96, DL96..... 35/-
6K8, 6K7, 6Q7, 6V6, 5Z4 or 6X5.. 35/-

TRANSISTORS. Mfrs. surplus PNP Junction type. **Audio Type,** 800 kc/s 250 mW 9/6. **R.F. and I.F. Mixer Type,** 2.5 Mc/s. 19/6. All tested and guaranteed.

Vol. Controls

Log. ratios, 10,000 ohms—2 Megohms. Long spindles, 1 yr. guarantee. Midget Ediswan type. No. Sw. 3/-; S.P. Sw., 4/-. D.P. Sw., 4/9. Linear Ratio, 10,000 ohms—2 Megohms. Less switch, 3/- each. **Coax plugs** 1/2. **Coax sockets,** 1/-. **Couplers** 1/3. **Outlet boxes,** 4/6.

80 ohm CABLE COAX

STANDARD ¼in. diam. Polythene insulated GRADE "A" ONLY"

8d. yd.

SPECIAL—Semi-air spaced polythene, 80 ohms **Coax.** ¼in. dia. Standard core. Losses cut 50% **9d. yd.** IDEAL BAND 3.

TRIMMERS, Ceramic, 4 pf.—70 pf., 9d.; 100 pf.; 150 pf., 1/3; 250 pf., 1/6; 600 pf., 1/9. **PHILIPS** Beehive Type—2 to 8 pf. or 3 to 30 pf., 1/- each.

LOUDSPEAKER.—PM. 3 ohms, 2½in. Elac, 17/6; 3½in. Goodmans 18/6; 5in. Rola 16/6; 6in. Elac. 18/6; 7×4in. Goodmans Elliptical 18/6; 8in. Rola 20/-; 10in. R and A., 25/-; 10in. WB-HF1012, 99/9; 12in. Plessey 15 ohm with 6×4in. Tweeter and Cross Over Filter, 97/6.

TRS RADIO COMPONENT SPECIALISTS

TRS

70 BRIGSTOCK RD., THORNTON HEATH, SURREY

Phone: THO 2188. Hours 9 a.m.—6 p.m., 1 p.m. Wed. Open all day Saturday. By THORNTON HEATH STATION.

TRANSFORMER & COIL WINDING CAPACITY AVAILABLE FOR PROTOTYPES & SMALL RUNS

Terms: C.W.O. or C.O.D. Kindly make cheques, P.O.s, etc., payable to T.R.S. Post and Packing up to 1lb. 7d., 1lb. 1/1, 3lb. 1/6, 5lb. 2/-, 10lb. 2/6. Bargain Lists 3d.

BRADMATIC

HIGH QUALITY TAPE RECORDING EQUIPMENT

OUR RANGE OF TAPE DESKS

Model 5D	(Taking up to 10½in. reels)	£50. 0. 0
Model 5CL	" " " 9½in. "	£47. 10. 0
Model 5CS	" " " 9½in. "	£45. 10. 0
Model 5B	" " " 7in. "	£42. 0. 0

All with two speeds, 3¾ and 7½ i.p.s. Three half track heads. Three heavy duty motors.
Desks also available fitted with stereophonic heads suitable for playing back E.M.I. "Stereosonic" tapes.

OUR RANGE OF MAGNETIC HEADS

HALF TRACK	
Standard (.970in. dia.)	Type 6RP Super Rec/Play
	Type 5RP Rec/Play
	Type 5R Record
	Type T5E Erase
Miniature (15 mm. dia.)	Type M6RP Super Rec/Play
	Type M5R Record
	Type M5E Erase
FULL TRACK (.970 dia.)	Type 6RPF Super Rec/Play
	Type 5RPF Rec/Play
	Type 5RF Record
	Type 5EF Erase

All the above heads are high impedance but low impedance heads can be wound at extra cost.
Two types of fixing stem available. Screening Cans available.

AMPLIFIERS

Our type 10 Record/play amplifiers have an overall frequency response of 30—15,000 cycles within 4 db. unweighted. Details on application.

Send for lists. Private and Trade supplied.

BRADMATIC LIMITED

STATION ROAD ASTON BIRMINGHAM 7

Phone: EAST 2881-2 Grams: Bradmatic, Birmingham

Phœnix

EYELETTING and light PUNCHING MACHINES

Autophoenix No. 6

A new and improved treadle operated machine for the automatic insertion and closing of eyelets in either flat or formed work in metals, plastics, fabrics, etc. The deep throat, high vertical gap and projecting base make this machine adaptable for eyeletting radio chassis, cylindrical shells, spinnings, mouldings, etc.

We manufacture a very full range of hand and automatic Eyeletting and Piercing Machines. Write for illustrated brochure to Dept. W.W.

HUNTON LIMITED

PHOENIX WORKS, 114-116 EUSTON RD., LONDON, W.1

Tel.: EUSton 1477 (3 lines) Grams: Untonexh, London

EARLY WARNING AMERICAN FIELD RADAR EQUIPMENT AN-TPS2

Frequency: 392-408 mc/s. Range approx. 80 miles.

The complete equipment is packed in eleven cases as follows:

CASE No. 1

Transmitter T25/TPS-2, in lightweight fibre carrying case. Nett weight 80 lb.
R.F. Oscillator, two Valves 53A
Receiver Cut-out, one Valve 532A
Duplexer, one Valve 532A
Pulse Driver, one Valve 829A
Pulser, one Valve 715B
H.V. Rectifier, two Valves 3B24
L.V. Rectifier, one Valve 3B24





CASE No. 2. Receiver-Indicator R36/TPS2, in lightweight fibre carrying case. Nett weight 85 lb.

Oscillator 6SN7GT; 1st Clipper 6H6; 2nd Clipper 6SL7GT; 3rd Clipper 6SN7GT; Sweep Amplifier 6SN7GT; C.R. Indicator 5CP1; Intensifier 6SN7GT; Multi-vibrator 6SN7GT; Transm. Synchroniser 6AG7; Video Amplifier 6AC7; Power Amplifier—two 6B4G; H.V. Rectifier 5U4G; H.V. Amplifier 3B24; Grid Bias Amplifier 6SQ7; Voltage Regulator VR105-30; 1st and 2nd RF Amplifiers—two GL446A; Oscillator—955; Converter—955; 1st, 2nd, 3rd and 4th I.F. Amplifiers—6AC7; Detector 6H6; Video Amplifier 6SJ7.

CASE No. 4. Nett weight 85 lb.
Spare Petrol Engine.
Tool Kit.
In lightweight fibre carrying case.

CASE No. 5. Nett weight 68 lb.
Interconnecting Cables.
Test Meter (Multi-Range Meter).
Spare Valves.
All in lightweight fibre carrying case.

CASE No. 6. Nett weight 75 lb.
Base for Engine and Alternator.
Alternator Spares.
Spares for Transmitter and Receiver.
All in lightweight fibre carrying case.

CASE No. 8. Nett weight 80 lb.
Interconnecting Cables.
Spares for Transmitter and Receiver.
All in lightweight fibre carrying case.

CASE No. 7. Nett weight 75 lb.
Engine, Silencer and Driving Belt.



Single Cylinder 4-stroke Air-cooled Petrol Engine, developing 2.3 H.P. at 2,500 R.P.M.

CASE No. 3. Nett weight 75 lb.
Alternator, 600 W., 115 V. 400 c/s single-phase, at 8,000 R.P.M.
Base Assy. for Engine and Alternator.
Tilting Stand for Receiver-Indicator.
Canvas Tent 7ft. high x 6ft. square.
Engine Spare Parts.
All in lightweight fibre carrying case.

CASES Nos. 9, 10 and 11.
Complete Hand Rotatable Aerial.
Total height, 16ft. Weight, 260 lb.



TOTAL PRICE OF COMPLETE INSTALLATION AS DESCRIBED

BRAND NEW, IN ORIGINAL PACKING CASES, Ex Warehouse

£130.0.0

THE FOLLOWING ARE ALSO AVAILABLE SEPARATELY:

CASE No. 1, containing Transmitter T25/TPS-2.....	£15 0 0	Carriage £1 10 0
CASE No. 2, containing Receiver/Indicator R36/TPS-2.....	£25 0 0	Carriage £1 10 0
ENGINE ONLY	£13 10 0	Carriage £1 0 0
ENGINE with baseplate, silencer, driving belt and spares.....	£17 10 0	Carriage £1 10 0
COMPLETE POWER UNIT, comprising Engine and Alternator mounted on common base, silencer, and spares for engine and alternator	£19 10 0	Carriage £2 0 0
CANVAS TENT, 7ft. peak x 6ft. square	£8 10 0	Carriage £1 0 0
AERIAL ASSEMBLY (Cases Nos. 9, 10 and 11)	£12 10 0	Carriage £2 0 0

VALVES: 3B24, 5U4G, 6AC7, 6AG7, 6B4G, 6H6, 6SJ7, 6SL7, 6SN7GT, 6SQ7, 53A, 532A, 715B, 829A, 955, GL446A, VR105-30.
C.R. TUBES: 5CP1.

Further particulars and prices on application

Z & I AERO SERVICES LTD.,

14, South Wharf Road, London, W.2

Telephone AMBassador 0151/2

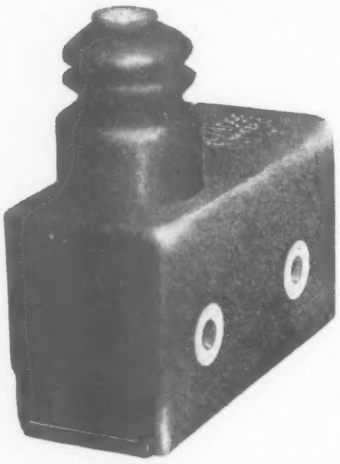

NOW ONLY

30,000 MICRO SWITCHES

BURGESS (Mk. 4 BR METAL BODY UNIVERSAL CONTACT A.M. Ref 5C/4098)

BRAND NEW

78/- PER DOZ (min. quantity)

Compare this remarkable almost half-price offer with manufacturers' prices.
Special quotations to manufacturers for large quantities.

HATTER & DAVIS (RELAYS) LTD., 126 Kensal Road, London, W.10. phone: LADbroke 0656/4640

▶ **RADIO and TV ENGINEERING**

▶ **RADIO and TV SERVICING**

▶ **ENGINEERING MATHEMATICS**

▶ **PRODUCTION ENGINEERING**

▶ **ELECTRONICS · MANAGEMENT**

▶ **Examination Courses for:** Brit. I.R.E., C. & G. Telecommunications, R.T.E.B. Certificate Society of Engineers, Brit. Inst. of Management.

▶ **PRACTICAL RADIO COURSE.**
A course in radio, electronic and electrical theory. You build a T.R.F. and a 5-valve superhet radio receiver, signal generator and multi-tester.
You learn at home in your own time, under expert tuition. Moderate fees include all books.

POST THIS COUPON TODAY for FREE book on careers in Radio etc., and full details of I.C.S. Courses.

Start today the **I.C.S. way!**

INTERNATIONAL CORRESPONDENCE SCHOOLS
Dept. 223L, International Buildings, Kingsway, London, W.C.2.

Name..... Age .....
(Block letters, please)
Address .....
.....
Occupation 2.53

INTERNATIONAL CORRESPONDENCE SCHOOLS

TECHNICAL TRADING CO.

SCR522 American Bendix transceiver 100-130Mc/s, easily convertible 2 metres Beautifully finished, less only valves 29/-, carr. 6/-; with all valves including two 832, 23/10/-. **JASON F.M. TUNERS** assembled, tested, valved, £8/15/-; **SELENIUM RECTS.** 250 V. 250 mA., 12/6, 230 V. 80 mA, 5/-.

GORLA F.M. KITS Consisting complete "Tuning Heart" (RF/mixer chassis with 1st I.F.), requiring only ECC85 valve. Also 2nd I.F. and 3rd I.F. (Discriminator) Transformers with added 465 kc. A.M. windings, latest German types, with fullest instructions, £3/15/-.

GERMANIUM CRYSTAL DIODES, famous make, tested, 9d. p. & p. 3d., 8/- doz.; **MARCONI TFS17P SIGNAL GENERATORS.** £12/10/-. **TF390G,** original transit cases, £12/10/-. **B.S.R. L050A L.F. Sig. Gens.,** tested, £12/10/-. **3IN. ALLADIN COILS,** screened, slugged, 1¼in. high, 6/- doz. **150 mA. 525-0-525 v. TRANSFORMERS** with 6.3 v. 5 a., 5 v. 3 a., 230 v. primary, 25/-. 10 H. 150 mA. L.F. chokes to match, 6/-. **1 mA. METERS,** Canadian, 2in. scale, 17/6. 1st Grade, 3½in. scale, £2/10/-. **COLLINS T.C.S. RECEIVERS,** 1.5-12 Mc/s., complete, £5. T.C.S. Transmitters, £7/10/-.

TRANSISTORS! A.F. TYPE, RED SPOT (up to 800 kc/s). Guaranteed. **8/6**
TRANSISTORS! R.F. TYPE WHITE SPOT (up to 2.5 Mc/s.) Guaranteed. **14/6**

POWER PACKS, 230 v. A.C. supply, two separate adjustable outputs, each 375, 550 or 620 v., 200/250 mA., double smoothed. Also 6.3 v. 5 a. Top quality, sealed transit cases, less valves, £6, or with four 5U4G valves, £7. **NIFE BATTERIES,** 45 a.h., unused, sealed bungs 9 cell, £4. 10 cell £4/8/- or £7/10/- per pair (24 volts).

13-CHANNEL CONVERTERS ! Unrepeatable opportunity, complete instructions, makers' sealed cases, no extra coils required, easily adapted most sets, beautiful Bakelite cabinet or internal mounting model, each £3/15/-.
As above with mains power pack, continuous tuning Channels 6-13, de Luxe model (listed £10/17/6), hammered gold finish, no alteration to receiver, £6/10/-.

12-VOLT 3-4 AMPS. RECTIFIERS, full wave, 9/6 to £5 doz. Cossor Wobbulators, £9/10/-. Mullard Capacity/Resistance Bridges, £4/19/-.

ET4336 R.C.A. 1 kW. Transmitters, low prices to callers only, for 230 v. 50~ mains, unusual opportunity at. from **£25**

GUARANTEED RADIO VALVES, BOXED, 24-HOUR SERVICE

5U4G	6/6	6J6	5/-	12AU7	7/-	ECC31	9/-	EF91	5/-
6BA6	6/6	6L6	8/-	12BK7	5/6	ECC82	7/-	EY51	14/-
6BE6	6/9	6SN7GT	5/9	25L6GT	8/6	ECL80	8/6	N78	11/-
6C4	4/9	6V6GT	6/-	EB34	1/6	EF50	2/6	5P61	9/6
6J5G	3/-	6X4	6/-	EBC33	7/-	EF80	8/9		

SEND S.A.E. FOR SPECIAL LIST (including all valves)

All items less 5% and post free for a dozen or more
Postage 1/3 in £1 (1/9 in £1 Speakers/Trans.). Min. 6d No C.O.D.
100 TELEVISION SET BARGAINS TO CALLERS AT:—
350/352, FRATTON ROAD, PORTSMOUTH

TELEVISION TUBES

RECTANGULAR T.V. TUBES
17" £7.10.0

12 MONTHS' GUARANTEE
14" £5.10.0

(USED)

6 months' full replacement, 6 months' progressive. Made possible by the high quality of our tubes. Ins. carr. 15/6. Special offer of 14in., 15in., 16in. round T.V. Tubes, £5. Convert your 9in., 10in., 12in. to these larger sizes. Details on how to "Do-it-Yourself" in our FREE catalogue. 12in. T.V. TUBES £6. 3 months' guarantee on all round tubes. 15/6 ins. carr. on all tubes. T.V. Tubes with burns £1. including carriage. Perfect Picture. Please enquire for types and sizes required.

17" T.V. CHASSIS

Latest improved circuits. Higher E.H.T. (brilliant picture). Improved sensitivity (for greater range). Chassis easily adapted to any cabinet. 17in. rectangular tube on adapted, reconditioned chassis. All channels. 12 months' guarantee on tube, 3 months' guarantee on valves and chassis. Less valves.



£19.19.6

With 5 valves **£21/19/6.** With all valves **£25/19/6.** Valve line-up (5 valves) 6SN7G, 6V6, EY51, 2-6D2s. Others: EL41, EL38, 7-6fls. Chassis size 11½in. x 14½in. x 11in. Ins. carr. 25/6 (incl. tube). Turret Tuner 50/- extra. State B.B.C. channels (and I.T.A. if turret tuner required).

14" T.V. CHASSIS, TUBE & SPEAKER £13.19.6

As above with 14in. round tube. Less valves. Guaranteed 3 months. With 5 valves, **£15/19/6.** With all valves, **£19/19/6.** Ins. carr. 25/- incl. tube. Turret Tuner 50/- extra.



HOME RADIO 79/6

5 valve (octal), superhet. 3 waveband receiver. A.C./D.C. Universal mains can be adapted for gram. P.U. In wooden cabinet. 18½in. x 11½in. x 8½in. Ins. carr. 7/6.

ELECTRIC CONVECTOR HEATER 99/6



Cleaner, cheaper, safer than paraffin. A.C./D.C. Switched for 1 or 2 k/watts. Illuminated grille. 200-250 volts. Ins carr. 10/6.

ELECTRIC FIRES, 17/6. Hammered finish. A.C./D.C. 200-250 volt. 1 k/watt. Post 3/6.

CAR AERIALS, 6/9. Whip antennae, 50in. long, collapsing to 11in., one hole fixing. Post 1/-.

BEAUTIFUL EXTENSION SPEAKER 29/9

Complete fitted with 8in P.M. Speaker "W.B." or "Goodmans" of the highest quality. Standard matching to any receiver. (2-5 ohms.) Flex and switch included. Unrepeatable at this price. Money refunded if not completely satisfied. Ins. carr. 3/6.

8in. P.M. SPEAKERS, 8/9. Let the lady of the house listen to that Radio or T.V. programme. Complete with O.P. trans., **10/-.** P. & P. 2/8.
P.M. SPEAKERS, 12/9. Elac. or Goodmans. High quality. 2-5 ohms. Complete with O.P. trans. **14/-.** P. & P. 2/9.

SELF FEED SOLDERING 19/6

6-12 volt, 100-125 volt. Made for the American market. Car battery or mains. Export quality. Complete in light carrying case. Reel of solder and spare parts. P. & P. 3/6. A few of the above in 6-12 volt, 200-240 volt, 35/6.

MAINS TRANSFORMERS

350-0-350 v. 80 m/a., 4 v.-4 v. heaters, 200-250 v. Prim.	3/9
350-0-350 v. 80 m/a., 12 v.-4 v. heaters, 200-250 v. Prim.	2/9
280-0-280 v. 80 m/a., 6 v.-4 v. 200-250 v. Prim. (Drop through, half shrouded.) All above 2/3 post.	5/9
425-0-425 v. at 250 m/a., 5 v. 6 a.-6.3, 6 a., 200-250 screened primary, P. & P. 2/6.	17/6

O.P. TRANSFORMERS, 1/3. Standard size (2-5 ohms.). Post 1/-. 20 for £1. P. & P. on 20, 5/6.

T.V. AERIALS, 25/6. For all I.T.A. and F.M. channels. For outdoor or loft. 3 element, at half their original cost. P. & P. 2/6.

DENCO RADIOGRAM CHASSIS 97/6



3 and 4 waveband turret tuned. Superhet. A.C. chassis, with 6in. or 8in. speaker. Size: 8½in. x 10in. x 12in. Valve line-up: CCH35, EF39, EBC33, CL33, and CY31. (CIC or dropper.) Ins. carr. 7/6

SUPER CHASSIS 99/6

5-valve superhet chassis including an 8in. speaker. 4 control knobs (Tone, Volume, Tuning, W.C. switch); 4 waveband, with position for gram. P.U. and for extension speaker. A.C. P. & P. 5/6.

CONSTRUCTOR CHASSIS UNITS

SOUND AND VISION STRIP, 25/6. Tested, working, complete less valves. I.F.s 16-19.5 mc/s. P. & P. 2/6. Drawing 2/6 or FREE with order.
POWER PACK, 29/6. 7-9 KV. R.F. EHT unit included. Smoothed H.T. 350 volt at 250 mA. Tested working, less valves, drawing 2/6 or FREE with order. Ins. carr. 5/-.
TIME BASE, 15/6. Tested working. Incl. focus unit, etc. Less valves. P. & P. 3/6.

HEADPHONES 1/9

Single earphone and headband. C-LR type. Ideal for crystal sets, extension on radio, etc P. & P. 1/3.

MIDGET EVER-READY BATRYMAX 9d.

"B" type battery, 22½ volt. No. B155. Ideal for Midget or Personal Radio. Hearing Aid or Photography Flash. Size: ½in. x 2in. Post 3d. 6 for 4/-, post 6d. 12 for 7/6, post 9d.

Boxed VALVES *3 MONTHS' GUARANTEE*

PEN46	6/9	6L19	8/9	6H6M	1/9	12AU7	5/9	ECC81	8/9
Z77	7/9	1S5	4/9	SP41	3/6	12BE6	6/9	ECH42	8/9
EL32	6/9	EZ40	8/9	T41	8/9	EAF42	8/9	EF39	6/9
EL91	3/9	4D1	2/9	6SG7	3/9	12SJ7	1/9	EF41	8/9
PEN45	6/9	6B8	3/9	77	3/9	SP61	3/9	EF91	7/9
TT11	6/9	6F12	7/9	8D2	3/9	EB34	1/9	EF37	4/9
X66	3/9	6D2	6/9	8D3	7/9	EB91	6/9	EF36	5/9

American Types. UX. All at 3/9 each.

18	75	80	6D6	6C6
42	78	ID6	6A7	

Barrettors 301 and 302 also at 3/9 each.

SIMULATOR UNITS, 19/6. Complete with valves. Telescopic aerial. Instruction booklet FREE with each order. Ideal for Walkie Talkie conversion. Test set 172A. Ex-W.D. P. & P. 4/6.

SEND FOR FREE 1958 CATALOGUE

TERMS AVAILABLE

LIVERPOOL ST. - MANOR PARK STN. - 10 MINS.

DUKE & CO. (DEPT. 6), 621-3, ROMFORD ROAD, MANOR PARK, E.12. TEL.: ILF. 6001-3.

RELAYS P.O. TYPE 3000.



BUILT TO YOUR SPECIFICATION
QUICK DELIVERY KEEN PRICES
CONTACTS UP TO 8 CHANGE OVER

RELAYS—HIGH SPEED. Miniature, sealed. 1760÷1700Ω. **25/-** each. Post 1/3.



KEY SWITCHES

PROMPT DELIVERY ALL TYPES UP TO 4co/6co

WAVEMETER. With all leads and spares. 180/220 M/cs. This fine unit contains a 2½in. milliameter 1FSD, 3 valves, pilot lamp, switch and other useful parts. The case 9×9×12½in. with hinged lid is adaptable for many purposes. BARGAIN PRICE **50/-.** Carriage 7/6.
SIGNAL GENERATOR. Type 52a. 4 bands from 6 to 52 Megacycles inclusive. 230 volt. Complete with all leads, etc. Brand new in transit case. **£10.** Carriage 7/6.

METERS GUARANTEED

F.S.D.	Size	Type	Price
100 Microamps	2½in.	MC/FR	50/-
250 ,,	3½in.	MC/FR	55/-
500 ,,	2in.	MC/FS	27/6
500 ,,	2½in.	MC/FR	37/6
1 Milliamps	2in.	MC/FS	27/6
1 ,,	2½in.	MC/FR	35/-
5 ,,	2in.	MC/FR	17/6
30 ,,	2½in.	MC/FR	12/6
100 ,,	2½in.	MC/FR	12/6
200 ,,	2½in.	MC/FR	12/6
300 ,,	2½in.	MC/FR	12/6
25 Amperes	2½in.	MI/FR	7/6
50-0-50 Amp.	2in.	MC/FS	12/6
20 Volts	2in.	MC/FS	10/6
40 ,,	2in.	MC/FS	10/6
300 ,, A.C.	2½in.	MI/FR	25/-
300 ,, A.C.	6in.	MI/FR	150/-

GROSS POINTER METERS. With 2 separate 100 microamp movements. Brand new. **22/6.** Post 2/-.
CIRCUIT TESTER in case. Meter 50 milliamps. **17/6.** Post 2/6.
AVO TEST BRIDGES. 220/240 volt A.C. Measures capacities from 5 pf to 50 mfd and resistances from 5 ohms to 50 megohms. Valve voltmeter range 0.1 to 15 volts and condenser leakage test. BRAND NEW. Full working instructions supplied with instrument. **£9/19/6.** Post 3/-.
TEST SETS incorporating a Wheatstone Bridge, galvanometer. Brand new, in case, **50/-.** Post 3/6.
CELL TESTING VOLTMETERS. 3-0-3. In leather case with prods. A first-quality moving-coil meter. **25/-.** Post 2/-.
WEE MEGGER in leather case. Brand new. 500 volts. **£12/10/-.**
ELECTRIC MOTORS. 200/250 volt, self-starting, 1 r.p.m., **35/-.** Post 1/6.
BRIDGE MEGGER TESTERS. 1,000 volts. 100 Megohms. Complete with the Evershed Resistance Box. Absolutely brand new and unused, in maker's original packing. £75. Less than half price.
TELEPHONES—SOUND POWERED—NO BATTERIES REQUIRED. Just connect with twin flex for clear speech. Transmitter/receiver units. **4/6** each. Twin flex **4½d.** yard. Post 1/-.
If 2 units are connected in series and one used for speaking and one for listening, perfect 2-way conversation can be made.
TELEPHONE SETS. For perfect communication between 2 or more positions. Wall Type, one pair of units, **£5.** Batteries **5/6.** Twin wire **5d.** yard. Desk Type, now available, latest modern style. Two complete units ready for use, **£8/17/6.** Wire **5d.** per yard. Post 3/6.
ROOM THERMOSTAT. Adjustable between 45 and 75 deg. Far., 250 v. 10 amp. A.C. Ideal for greenhouses, etc., **35/-.** Post 2/-.
HEATING ELEMENTS. Flat enclosed type. 230 volt 500 watt. "Bray chromalox." 10×1½in. **7/6.** Post 1/6.
CHARGING RECTIFIERS. Full wave Bridge. 12 volts 2 amps., **13/6.** 4 amps., **22/6.** Suitable transformers 2 amp., **24/-.** 4 amp., **27/3.** Post 2/-.
JACK PLUGS. Cylindrical bakelite screw-on cover. 2 contact. Ideal for amplifiers, etc., **2/6** each, **24/-** doz., **£9** per 100.
AIR BLOWERS. 230 volt A.C. .57 h.p. 15in. fan, 6in. outlet. Brand new. **£25.** Carriage in England 20/-.

GEARED MOTORS for the model maker, small and very powerful. 12/24 volt D.C., 4/8 r.p.m., **35/-**, post 2/6. Will work from 230 volt A.C. mains with our transformer and rectifier **17/-** extra.

PORTABLE BLOWERS. 200/250 v. A.C./D.C., 300 watts with switch and leads, 1¾in. outlet. **£5.** Post 3/6.
VOLTAGE REGULATORS. Input 230 v. A.C., 21 amp. Output 57.5 v. to 228 in 16 steps with current limiting reactor. **£12/10/-** each, carriage 10/-.
RACKS—POST OFFICE STANDARD. 6ft. high with U-channel sides drilled for 19in. panels, heavy angle base, 4ft. 10in. also in stock.
VERNIER DRIVES. Muirhead scaled 0/180 deg. Ratio 38 to 1. Diam. 3in. **10/6.** Post 1/6.
HEADPHONES. Balanced Armature Type DHR. **17/6** per pair. Post 1/6.
HEADPHONES. High resistance 4,000Ω Type CHR, new, **12/6** pair. Post 1/6.
VENT AXIA FANS—EXTRACTION OR INTAKE. 230/250 volts A.C. 6in. diam. blades. **130/-.** 12 volt D.C., **90/-.** Post 2/9.
RATIO ARM UNITS. Sullivan. 600 ohms+600 ohms. **50/-.** Post 2/-.
WHEATSTONE RESISTANCE BRIDGE. 1 to 10,000 ohms. Plug type, **£5.**
SWITCHES. 1 hole fixing, 3 amp. 250 volt. Single pole change over, **1/6** each, **12/-** doz. **£37/10/-** per 1,000.

L. WILKINSON (CROYDON) LTD.

19, LANSDOWNE ROAD, CROYDON
'Phone: CRO. 0839 Telegrams: "WILCO", CROYDON

BAND III CONVERTOR

for ANY SET in ANY AREA

This unit has been widely used since I.T.A. Transmissions began to convert all types of sets, Superhet and T.R.F., to receive on Band III.

Unlike many other convertors this unit is small enough to be fitted inside your cabinet, enabling the job to appear finished and perfectly safe for all to use.

The wiring is simple to follow, and alignment is not difficult.

- IT will convert any set, any age, T.R.F. or Superhet.
- IT includes station switching.
- IT provides pre-set contrast balancing.
- IT uses only one aerial input for both bands.
- IT provides manual tuning on Band III
- IT is totally screened.
- IT completely rejects unwanted signals.
- IT requires no additional power supply where either 6.3 v. or .3 amp. heater is available.

CONVERTOR wired and aligned with fitting instructions	£3 10 6
KIT complete in every detail, ess knobs	£2 10 6
KNOBS each	1 0
CIRCUIT and instructions in detail (free with kit)	1 6
KITS made up by customers checked and aligned, including post	12 6

When ordering please state present B.B.C. Station and I.T.A.

Orders over £2 post free.

C. & G. KITS

285, LOWER ADDISCOMBE ROAD
ADDISCOMBE, CROYDON, SURREY

Phone: ADDiscombe 5262

False economy . . .

To try to cut costs when buying a pick-up is the very worst sort of false economy. It is vital that the pick-up in any high fidelity system is of the highest possible class.
Here are some that come under that heading.



RCA

Illustration shows the long arm model. Price with Dual Sapphire Styli. **£14.11.10.** Also available with diamond styli.

ORTOFON

A Danish made moving coil pick-up with Diamond Styli fitted heads. Type C **£19.14.9.** Pick-up arm **£5.5.9.** Type A **£10.18.6.** Transformer **£2.10.0.**

LEAK MOVING COIL

With one head, diamond point, arm, transformer. Spare head (78 or L.P.) **£7.3.4.** **£13.16.5**

CONNOISSEUR

The Mark 2 head L.P. or 78 Sapphire. **£4.19.11.** With diamond **£9.8.6.** Arm **£3.7.1.**

GOLDRING 500

Variable reluctance turn-over cartridge, L.P. and 78 Sapphire. **£3.9.6.** Super 500/M.S.D.: L.P. Diamond, 78 Sapphire, Mumetal shield **£9.16.0.** L.56. Arm **£3.9.6**

In addition, we carry a full range of cartridges and styli by Acos, Elac, Shefi, etc.

Quality Mart

8 Dartmouth Park Avenue,
London, N.W.5. GULliver 1131

VALVE LIST

2X2	2/6	6SH7	6/-	12SH7	5/-
5U4G	7/6	6SL7GT	7/-	EA50	1/6
6AC7	5/-	6SN7GT	6/6	EB34	1/6
6AG7	9/6	6V6GT	7/6	EF50	3/-
6AK5	6/6	955	1/9	P61	3/6
6C4	3/6	956	1/9	SP61	3/-
6H6	2/6	9004	1/9	VR116	3/-
6J5	4/6	9006	3/6	VR15030	6/-
6J6	5/-	12A6	6/6	VT501	3/-
6K7	5/-	12J5	6/-		
	446B	25/-	464A	25/-	

All brand new and tested.

Please add postage and packing.

CONVERTERS

Covering 40–50 Mc/s., switched tuning. 8/6; 50–65 Mc/s., tunable, 20/–. Tropical packing with circuits. Post 3/6 each.

RCAF AMPLIFIER UNIT. 12 v. input Vibrator Pack. 250 v. output OZ4. Microphone transformer into a 6K6 GT output valve with negative feed back. Size 8×5½×8½in. Brand new, 35/– each, P. & P. 3/–.

WAVEMETER TYPE W1433. Frequency 154–260 mc/s., with crystal check and calibration chart. Mains 50 cycle. 50/–, carriage 10/–.

COMMUNICATION RECEIVER RA 1B. Covers 150 kc/s–15 mc/s in 6 bands. 12 or 24 operation. Send for details.

INDICATOR UNIT SLC No. 5. Ideal for conversion into an Oscilloscope using a 139A or ACR 10 tube. Unit consists of 2-VR65's, 1-VR66, various resistors, condensers and pots. Size 11×6×3in. Brand new, complete with modification circuit. 20/–, P. & P. 3/–.

PARMEKO CHOKES. 8 H. 100 mA. 7/6, P. & P. 1/6.

AMERICAN GEARED MOTOR. 24 v. D.C. with built-in precision gear-box, No. 1 drive 24 R.P.M. No. 2 drive 6 R.P.M. On 12 v. No. 1 drive 16 R.P.M. No. 2 drive 4 R.P.M. Overall size of motor and gearbox 7½×3½×3in., weight 11b. 14 oz. Brand new. 22/–, P. & P. 3/–.

WESTON 1 Amp. H.F. METERS

2in. circular. Brand new. 5/6, P. & P. 1/–.

POCKET VOLT METERS. Read 0–25 volts and 0–20 volts D.C. Brand new. Only 15/–, P. & P. 2/6.

DIPOLE AERIAL No. 4A. 52 feet hard drawn 7/22 copper wire with centre insulator, fitted with feeder sockets. Both ends have 3 link insulators and slotted wire adaptors. Brand new, price 9/–, P & P. 2/–.

500 MICROAMPS METER. 2in. circular calibrated 0–15 and 0–700 volts, resistance 500 ohms. 12/6, P. & P. 2/6.

RELAYS. 6,500 ohms and 3,500 ohms. 8/– pair, post paid.

DYNAMIC SOUND POWERED HEADPHONES. Type D.L.R. 5. 60 ohms. 7/6, P. & P. 1/6.

BENDIX RECEIVER RA 10. A 4 wave-band superhet covering 150 kc/s–10 mc/s. Valves 6SK7 1st R.F. 6K8 Mixer. 6SK7 1st and 2nd I.F. 6R7 2nd Det. 6C5 B.F.O. 6K6 output. Size 6½×15½in. Easily converted to mains operation as described on page 453 of the September "Practical Wireless." £5/10/–, carr. 7/6.

HIGH RESISTANCE HEADPHONES. Type No. 2 4,000 ohms. Brand new 11/6 each, P. & P. 1/6.

BENDIX RECEIVER MN26.C. Covering 150–1,500 kc/s in 3 bands. Valves used 5-6K7, 2-6N7, 2-6J5, 1-6F6, 1-6L7. Complete with switching motor and dynamotor.

This superb unit has been modified for 12 v. operation. With circuit. Only 80/–, carr. 8/6.

R109 RECEIVERS



8 valves, 5-ARP 12's, 3-AR 8's covering 1.8-8.5 mc/s on two frequency bands. Contains 6 v. Vibrator Pack and built-in 3½in. Goodman speaker, operates from 6 v. battery, consumption 1½ amps. Housed in metal case 13x12x11in. Designed for Mobile or Ground station. Operates with any normal aerial. Complete and tested, including circuit. Very good condition. Only 80/–, carr. 7/6.

BATTERIES suitable for above giving 8–10 hours continuous running. FOUR 1.5 dry batteries in series. 5/–, P. & P. 3/6.

SPECIAL VIBRATOR PACKS

★ ★

12 VOLT input, 300 volts output at 150 m/A. As a bridge rectifier will handle 450 volts RMS at 120 m/A. Pack consists of 12 volt vibrator, 4 metal rectifiers, chokes and smoothing condensers. ONLY 30/–, carriage 5/–.

6 VOLT input, 230 v. output at 100 mA., complete 4-pin vibrator, OZ4 rectifier. Fully smoothed, 25/6 each, P. & P. 2/6.



R.T-7/APN-1 ALTIMETER TRANCEIVER

Brand new complete with 14 valves: 3-12SJ7, 4-12SH7, 2-12H6, 1-VR150, 2-9004, 2-955. Famous Wobulator Unit. Dynamotor, Relays 3,500 ohms and 6,500 ohms. A.F. amplifier. Receiver section covers 400–450 mc/s. Transmitter sweeps 418 to 462 mc/s with manual. Only 35/–, carriage 10/–.

COMMUNICATION RECEIVER R1155

This magnificent receiver covers 5 ranges: 75–200 kc/s., 200–500 kc/s., 600–1,500 kc/s., 3–7.5 mc/s., 7.5–18.5 mc/s. Fully tested before despatch. Complete with circuit and instruction booklet, £8/10/–, carriage 10/–.

WHEATSTONE BRIDGE. Consisting of four stud switches: 0-10 ohms, 0–100 ohms 0-INF. Galvanometer centre zero F.S.D. 2.5mA. Ranges easily extended. Housed in oak cabinet 16 × 7½ × 6in. Complete with instructions, 40/–. P. & P. 4/–.

No. 38 TRANSMITTER/RECEIVER WALKIE TALKIE

Range approx. 5 miles. Covering 7.4–9 mc/s. Absolutely complete with junction box, headphones, microphones, webbing, haversack. Brand new, only 60/–, carriage 7/6.

Relda Radio Ltd.

(Dept "W"), 32A, Coptic Street, London, W.C.1.
Phone: MUSeum 9607

Tottenham Court Road Underground. Fourth turning on left down New Oxford Street.

LUMINOUS MAGNETIC MARCHING COMPASS



Pocket size. Brand new with instructions ONLY 15/–, P. & P. 1/–.

ORIGINAL AR88 MAINS TRANSFORMERS. Input 110–240 v. Output 345-0-345 at 150 mA. 5 v. at 2 amps. and 6.4 v. at 4.5 amps. Brand new, fully shrouded. 50/–. P. & P. 3/–.

U.S.A. INTERPHONE AMPLIFIER. This unit uses 2 6v6's. Includes microphone transformer, output transformer, sidetone transformer, 60 mA. choke. Fuse holders and double pole 10 amp. switch. DYNAMOTOR 12 v. INPUT 250 v. OUTPUT AT 50 mA. Size 9×9×5in. Brand new, less valves, only 55/–, carr. 5/–.

HOOVER ROTARY TRANSFORMERS. 11.5 v. input, 490 v. output at 65 mA. and 6 v. input 300 v. output at 65 mA. Guaranteed and tested, only 27/6. P. & P. 2/6.

TANNOY AMPLIFIER. With 4 6L6's in parallel, push-pull handling from 30 to 60 watts. 200–250 v. input. Complete with all leads, hand microphones, plugs and spares. Housed in wooden transit case 17½×15½×21½in. with full operating instructions and circuit. Fully tested. ONLY £20. Speakers for above 25/– each.

FERRANTI TRANSFORMERS. Input 225 volts, output 4 volts at 2 amps. or 5 amps Potted type with ceramic bushes. Brand new, 7/6 each, P. & P. 1/–.

B.C.773-D RECEIVER. 108.3–110.3 mc/s. 10 valves, 3-VT269, 1-12AH7, 2-12SR7, 2-12SG7, 1-12SQ7, 1-12A6. 6 crystals. 12 v. operation. £4, carriage 7/6.

WESTINGHOUSE PENCIL RECTIFIER. Type J.50 output 500 v. at 5 mA. 5/– post paid.

AMERICAN ROTARY CONVERTERS



With cooling Fan. Input 12 v. D.C. Output 250 v. at 90 mA. Completely suppressed. Brand new, 19/– each, plus P. & P. 3/–.

HEADPHONE & MICROPHONE ASSEMBLY. Consisting of padded headphones and No. 7 moving coil hand microphone with cord and plug. Brand new. Price 25/–.

PYE 45 mc/s I.F. STRIPS. complete with seven valves, 6-EF50, 1-VR92, 6 tunable I.F. transformers. Only 30/–, post paid.

FILTER UNIT 503. Frequency 20–35 mc/s., with silver plated coil. Condenser 140 pf., Veeder counter, coax. input and output sockets. Suitable for conversion to absorption wavemeter. 12/6, P. & P. 2/–.

COMMAND RECEIVERS. 1.5–3 mc/s, fully valved, with circuit, 65/–, P. & P. 3/6. 3-6 mc/s, fully valved, 35/–, P. & P. 3/6.

MONITOR TYPE 28. Consists of VCR138 6-SP61, 1-5U4, 1-VU120, 3-EA50.1 m/ameter scaled 100-0-100v. Incorporates Y shift, X shift in u/sec. Focus, sync, Bias, Input to X plates switched ×20. ×5 and direct, requires only suitable power pack for use as oscilloscope. 60/–, carr. 10/–.



SAMSON'S SURPLUS STORES

LONDON'S GREATEST DEALERS IN RADIO AND ELECTRONIC EQUIPMENT

169-171 EDGWARE RD. LONDON W.2

TELE: PAD. 7851

LT SUPPLY UNIT Type 115. AC input 200-250 v. Output 24 v. 26 amps. rating continuous. Ideal for charging 24 v. batteries at a high current. Approximate size 1ft. 6in. × 1ft. 6in. × 1ft. 6in. Used but in good condition and guaranteed electrically. **£17/10/-** plus carr.

NEVLIN 3,000 WATT AUTO TRANSFORMERS. Input 200-250 v Output 110 v. Completely enclosed in grey metal cases. With input voltage selector switch and fuses. Supplied brand new at a fraction of maker's price. **£9/15/-** plus carr.

HEAVY DUTY SLIDING RESISTORS. 79 ohms, 2.9-0.65 amps. Double tube geared drive, fitted with automatic limit switch. **32/6** 5.3 ohms 8 amps, geared drive **25/-**. 46 ohms 6.5-3.3 amps, geared drive **45/-**. 1 ohm 12 amps, slider control **12/6** 3.1 ohms 20 amps. geared drive **32/6**. 2 ohms 16 amps, slider control **22/6**. 0.4 ohms 25 a., geared drive **17/6**. 50 ohms 1 amp, slow motion geared drive **8/6**. 95 ohms 3.3 amps, no control but fitted with adjustable tappings **22/6**. 17.5 ohms, fixed **10/6**. 800 ohms 0.5 amp **12/6** 12-in. dia. rheostats, 38 ohms 5.6-2.1 amps **37/6**. Postage on all resistors 3/-

NUTS, BOLTS, WASHERS. Special bargain offer 5/- carton of 2, 4 and 6 B.A. nuts, bolts and washers. P.P. 1/-.

BLOCK CAPACITORS. 10 mfd. 500 v. wkg. at 140 deg. F., sub chassis mounting. **6/6**. 8 mfd. 600 v. wkg. at 71 deg. C. **5/6**. 4 mfd. 800 v. wkg. at 160 deg. F. 5/-. 4 mfd. 400 v. wkg. at 160 deg. F. **3/6**. 4 mfd. 250 v. wkg at 160 deg. F. **2/9**. 2 mfd. 800 v. wkg. at 71 deg. C. 1 mfd. 600 v. wkg. at 160 deg. F. 0.5 mfd. 2,000 v. wkg. at 160 deg. F. **3/9** All condensers supplied new and guaranteed. Postage on all condensers 1/6.

HOOVER MINIATURE GEARED MOTORS Flasher type E. 9 r.p.m. at 24 v DC, 4½ r.p.m. at 12 v. DC. Overall size of motor and gearbox 4½ × 2½ × 2½in. Mounted in metal box which contains suppressor unit. **27/6**. P.P. 2/6.

EXCLUSIVE PURCHASE. Miniature 2 volt 3 a.h. Glass Accumulators. Size 4½ × 1⅞ × 1⅞in. Ideal for models, HT supply construction, etc., etc. Supplied brand new with full charging instructions. **4/11**. P.P. 1/6.

BANKS OF 12 CELLS as above connected to give 24 volt 3 a.h., in strong wooden crates. **55/-** per crate. Carr. 5/-.

SPECIAL OFFER OF A.M. RECORDING WIRE. Type Z.A.31364. No. 1 on ½lb. spools. Supplied brand new in metal containers. **35/-**. P.P. 1/6.

AM AERIAL CHANGEOVER SWITCHES Type 77. Manual operation or 24 volt DC. Brand new. **15/-**. P.P. 2/6.

WILLARD 24 volt 11 a.h. **AIRCRAFT BATTERIES.** Completely enclosed in metal container. Size 8 × 7½ × 7½in. Supplied brand new with charging instructions. **62/6**. Carr. 5/-.

HIGH GRADE SLEEVING. 1⅛ Mil.-5 Mil. Mixed bundle, wonderful value. **2/6**. P.P. 1/6.

PERSONAL SHOPPERS WELCOME.
ORDERS ACCEPTED M/A FROM COLLEGES, SCHOOLS, LABORATORIES, ETC.

ROLLS-ROYCE COOLANT PUMPS. A heavy duty turbine type pump driven directly from a splined socket, 1,000-1,500 G.P.H. 1¼in. bore outlet. Brand new in maker's carton. **47/6**

ISENTHAL MERCURY CONTACTORS. AC 200-240 v. 2 pole 6 amps., contacts completely enclosed fitted spirit level, overall size 7 × 4½ × 3½in. **35/-**, carr. 2/6.

INSTRUMENTS, ADMIRALTY INTEGRATORS, TYPE A S9I. Incorporating very fine Galvo movement, coil 40 ohms. Centre zero to F.S.D. 1 microamp. Small mirror one metre radius. A very useful laboratory instrument. **65/-**, carr. 2/6. **METRO-VICKERS MASTER VOLTMETERS,** 0-20 volts AC. 50 cy. M.I. 6in. mirrored scale. **25/-**, P.P. 1/6.

A.M. HEAVY DUTY TRANSFORMERS Pri. 220-230 v. Sec. 50 v. 30 amp. **£6/10/-**. Carr 10/-. Pri. 200-250. Tapped. Sec. tapped 28, 29 30 31 v. 21 amps. **£4/10/-**. Carr. 7/6.

CARBON RESISTORS ½-3 watt. **10/-** per 100. Large selection of values. P.P. 1/-. **SILVER MICA, MICA AND TUBULAR CONDS.** Good selection. **10/-** per carton of 50. P.P. 1/-

HEAVY DUTY A.M. ROTARY TRANSFORMERS. Type 10K 24-31. Input 18 volts. Output 7.2 v. 13 amp. and 225 v. 0.11 amp. Easily converted into a powerful high-speed motor for 220-240 v. AC. Data supplied. Brand new **15/-**. Carr. 4/-.

Still THE MOST RELIABLE
MAGNETIC RELAY



A.I.D.
A.R.B.
ADMIRALTY
APPROVED

Manufacturers of
K.3000 and K.600 Type RELAYS
PROTOTYPE RELAYS
to customers specification.
Made up at short notice.
Your enquiries given prompt attention.

A.D.S. RELAYS LTD. Dept. W.W.
12 STORE STREET, LONDON, W.C.1. Tel. MUSeum 2455

MIDLAND INSTRUMENT CO.

MAINS BLOWER. 200/250 v. A.C./D.C., ½ amp., 5,000 r.p.m., consists of the motor with attached enclosed fan, and funnel intake 1¾in. dia., side outlet 1in. × ¾in., plinth base 5in. × 4¼in., finish black crackle and diecast aluminium, size overall 9in. long, 4¼in. wide 5in. high, weight 7¼lb., a very superior blower, offered at a fraction of original cost, new unused, **25/-**. Post 3/6.

BALANCED ARMATURE RECEIVER INSETS No. 5, in black plastic cases, the most popular and versatile of all ex-Govt. stock. Ideal as single or dual headphone receivers, self-energised microphones, 2 coupled by ordinary twin flex, provide an efficient 2-way telephone system, brand new perfect stock in sealed cartons. **3/9** each, post 1/-, 3 for **11/6**, post 1/6, **42/-** doz., post 3/-, sealed wood cases containing 54 receivers, **£8/2/-**, carriage 100-m. **7/6**, 200-m. **10/-**, 300-m. **12/6**, C.I., N.I., and I.O.M. **20/-**.

ELECTRIC PUMPS, suitable for most liquids, the popular cylindric immersible type, 24-v. at which they deliver 10-g.p.m. at 20ft. head, also give excellent performance at 12-v., new in sealed cartons, 1ft. long **30/-**, post 2/3; ditto 4ft. long **35/-**, carriage 5/-.

HUGHES MOTOR, shunt wound, 12-v. 1½-amp., speed 5,000 r.p.m., reversing, size 3¼in. long, 1⅞in. dia., ¼in. shaft, weight 20 oz., a very superior motor designed for anti-radar equipment, new unused **10/-**, post 1/6, **£5 per doz.**, carriage paid, ditto fitted reduction gear, giving a final drive (¼in. shaft) of either 320 or 160 r.p.m., state which required, **12/6**, post 1/9; **£6** per doz., carriage paid.

POWER SUPPLY UNITS No. 8, consists of the hand generator, which charges a 6-v. battery at 5 amps., or a 12-v. at 3 amps., complete with cut-out, vibrator pack, 6-v. input provides all H.T. and L.T. supplies for the 18 and 38 sets, spare Mallory-type 650 vibrator, connecting leads, bakelite battery box, contained in metal back carrying pack, size 17in. × 10in. × 7½in., new in sealed cartons, **35/-**, carriage 100-m. **7/6**, 200-m. **10/-**, 300-m. **12/6**, C.I., N.I. and I.O.M. **20/-**.

JOHN OSTER MOTORS. These are the 12-v. 1.4 amp shunt type (not 24-v.), speed 5,600 r.p.m., fitted enclosed reduction gearbox, with two ¼in. dia. drive shafts giving 6 and 24 r.p.m., a cam is fitted to the 24 r.p.m. shaft, actuating another shaft which has a ¼in. linear reciprocating movement in guides, easily the finest of all ex-Govt. motors, new unused, worth £12, our price **25/-**, post 1/9; 2 for **50/-**, post paid.

LOUDSPEAKERS by Pye, Phillips, etc., consists of the 10in. dia. P.M. speaker, 3 ohm coil, less transformer, fitted in a smart brown finished wood case, size 17 × 17 × 6½in. with carrying handle, metal grill at front with 4 smaller ones at rear, rear compartment contains 50ft. superior twin lead fitted standard jackplug, new in sealed cartons, special bargain offer, **37/6**, carriage 100-m. **6/-**, 200-m. **8/6**, 300-m. **11/-**, C.I., N.I. and I.O.M. **15/-**.

SELENIUM RECTIFIERS. These are latest brand new G.E.C. supply, not ex-Govt. or assembled from bits, full-wave bridge, 12-v. 1½ amp. cont., 2 amp. int., **10/-**, post 1/-; ditto, 12-v. 3 amp. cont., 4 amp. int., **15/-**, post 1/6; mains transformers to suit 200/230/250-v., with 5-11-17-v. outputs to charge a 2, 6 or 12-v. battery, brand new, 1½ amp type, **15/-**, post 1/9; 3 amp. type, **20/-**, post 2/3, complete with wiring diagram.

SLYDLOK FUSES, 250-v. 15-amp., 6 of these on a common bar, new unused, 5/-, post 1/6, 12 fuses **10/-**, post 2/-.

REFLECTOR GUNSIGHTS by Ross, etc., consists of an optical mount containing 4 high-grade lenses, 3 are 34-mm. dia., bi-convex, plano-convex, concave negative, with smaller bi-convex objective, mount is in line with enclosed lamphouse, fitted reflector, lampholder and rheostat, new unused, cost £20, our price **10/-**, post 1/9.

MERCURY SWITCHES, 250-v. 10-amp., glass tilt type fitted brackets, specially designed to give 3-second delay make after tilt, new, boxed, 5/-, post 1/-. **50/-** doz. post paid.

MAGNETIC RELAYS, 12-v. ½ amp. operation, closes 40 amp. D.C. contacts, in bakelite cases with cover, new unused **2/6**, post 10d., **24/-** doz. 3/-

Many other Bargains; send stamped addressed envelope for lists.
MIDLAND INSTRUMENT CO., MOORPOOL CIRCLE, BIRMINGHAM, 17
Tel.: HAR 1308

C.R.T. ISOLATION TRANSFORMERS

For Cathode Ray Tubes having Heater/Cathode short circuit and for C.R. Tubes with falling emission.
Type A. Low leakage windings. Ratio 1:1.25 giving a 25% boost on Secondary.

2 volt	10/6 each	
4 volt	10/6 each	with Tag
6.3 volt	10/6 each	Panel and
10.3 volt	10/6 each	Solder Tags
12.3 volt	10/6 each	
Ditto with mains primaries	12/6 each	

Type B. Mains input 220/240 volts. Low Capacity. Multi Output 2, 4, 6.3, 7.3, 10 and 13 volts. Input has two taps which increase output volts by 25% and 50% respectively. This transformer is suitable for all Cathode Ray Tubes. With Tag Panel 21/- each. Ditto for 6 volt Tubes only 17/6.
Type C. Low capacity wound transformer for use with 2 volt Tubes with falling emission. Input 220/240 volts. Output 2-2½-2½-2½-3 volts at 2 amps. 17/6 each.
All Isolation Transformers are individually boxed, labelled and clearly marked with relevant data.
NOTE:—It is essential to use mains primary types with T.V. receivers having series connected heaters.

RESISTORS. All preferred values. 20% 10 ohms to 10 meg., ½ w. 4d.; ¼ w. 4d.; 1 w., 6d.; 1½ w., 8d.; 2 w., 1/-.
HIGH STABILITY. ½ w. 1%, 2/-. All preferred values 100 ohms to 10 meg. Ditto 10%, 6d.

5 watt	WIRE-WOUND RESISTORS	1/3
10 watt	25 ohms—10,000 ohms	1/6
15 watt		2/-

10,000 ohms—50,000 ohms, 5 w., 1/9; 10 w. 2/3
WIRE-WOUND POTS. 3 WATT. LAB. COLVERN, ETC. Pre-set Min. T.V. Type Slotted Knob. Standard size Pots., 2½in. Spindle High Grade. All Values. 100 ohms to 50 K. All values 25 ohms to 30 K., 3/- ea. 50 K., 4/-. Ditto Carbon Track 50 K. to 2 Meg., 3/-.
O/P TRANSFORMERS. Heavy Duty 50 mA., 4/6. Multi-ratio push-pull, 6/6. Miniature 3V4, etc., 4/6. Hygrade Push-Pull 7 watts, 15/6.
L.F. CHOKES 15/10 H. 60/65 mA., 5/-; 25/20 H. 100/120 mA., 11/6; 20/15 H., 120/150 mA. 12/6; 5 H. 250 mA. 15/-.
MAINS TRANS. 350-0-350, 80 mA., 6.3 v. tapped 4 v. 4a. 4 v. tapped 4 v. 2 a., ditto 250-0-250 80 mA., etc., 22/6. Bargain 300-0-300 v. 65 mA., 6 v. 4 a., 4 v. 2 a., 15/-.

I.F. TRANSFORMERS 7/6 pair

465 Kc/s Slug tuning Miniature Can 2½ × 1 × 1in. High Q and good bandwidth. By Pye Radio. Data sheet supplied
Wearite M800 IF Transformers 465 Kc/s, 12/6 pair.

HEATER TRANS. Tapped 200/250 v. 6.3 v. 1½ amp., 7/6.
ALADDIN FORMERS and cores. ½in., 6d.; 1in., 10d.
2in. FORMERS 5637/8 and Cans TV1/2. ½in. sq. × 2½in. and 1in. sq. × 1½in., 2/- complete with cores.
SLOW MOTION DRIVES. Epicyclic ratio 6 : 1. 2/3.
TYANA. Midget Soldering Iron. 200/230 v. or 230/250 v., 16/6.
SOLON INSTRUMENT IRON. 25 w., 24/-.
MAINS DROPPERS. 3 × 1½in. Three Adj. Sliders, .3 amp. 750 ohms, 4/3. .2 amp., 1,000 ohms, 4/3.
LINE CORD. .3 amp., 60 ohms, per foot, 2 amp., 100 ohms per foot, 2 way, 6d. per foot, 3 way, 7d. per foot.

CRYSTAL MIKE INSERT by Acos

Precision engineered. Size only 1¼ × 8/16in. Bargain. Price 8/6. No transformer required.

MIKE TRANSF. 50 : 1, 3/9 ea.; 100 : 1, Potted 10/6.
LOUDSPEAKERS P.M. 3 OHM. 2½in. square, 17/6.
3in. R.A., 17/6 7in. × 4in. Goodmans 21/-
3½in. Square Elac., 21/- 8in. Plessey, 19/6
6½in. Goodmans, 18/6. 10in. R.A., 30/-
4in. ELAC. TWEETER, 25/-. 12in. Plessey, 30/-
8in. M.E. 2.5 k. field tapped O.P. transformer. 24/6
15 ohm Plessey 10 wt. 12in. with Tweeter. 97/6.
CRYSTAL DIODE G.E.C., 2/-. GEX34, 4/-. 40 Circuits, 3/-.
CRYSTAL SET CONSTRUCTOR. Kit 12/6. Book 1/-.
H.R. HEADPHONES. 4,000 ohms, brand new. 18/6 pair.
SWITCH CLEANER Fluid, squirt spout, 4/3 tin.
TWIN GANG CONDENSERS. 365 pf. Miniature, 1½in. × 1½in. × 1½in., 10/-. .0005 Standard with trimmers, 8/-; less trimmers, 8/-. Midget, 7/6; Single 50 pf., 2/6. Solid Dielectric 100, 300, 500 pf., 3/6 each.

SUPERHET COIL PACK 27/6

Miniature size 2½ × 2½ × 1¼in. High Q dust cored coils. SHORT, MED., LONG. GRAM switching with connection diagram and 5 valve circuit. 465 Kc/s I.F.

VALVE HOLDERS. Pax int. Oct., 4d. EF50, EA50, 6d. B12A, CRT. 1/3. Eng. and Amer. 4, 5, 6, 7 and 9 pin, 1/-.
MOULDED Mazda and Int. Oct., 6d., B7G, B8A, B8G, B9A, 9d. B7G with can, 1/6. VCR97, 2/6. B9A with can, 2/6.
CERAMIC. EF50, B7G, B9A Oct., 1/-. B7G with can, 1/9.
SPEAKER FEET. Gold Cloth 17in. × 2½in., 5/-. 25in. × 3in., 10/-. Expanded metal, silver 15½in. × 9½in., 2/-.
Tyan 4ft. 6in. wide, 10/- ft.; 2ft. 3in. wide, 5/- ft.
WAVECHANGE SWITCHES.
2 p. 5-way 3 p. 2-way, short spindle 2/6
2 p. 6-way 2 wafer, long spindle 6/6
2 p. 6-way, 4 p. 2-way, 4 p. 8-way, long spindle 3/6
2 p. 6-way, 1 p., 12-way, long spindle 3/6
Wave change "MAKITE." 1 wafer 8/6; 2 wafer 12/6; 3 wafer 16/-; 4 wafer 19/6; 5 wafer 23/-; 6 wafer 26/6.
TOGGLE SWITCHES. S.P., 2/-; D.P. 3/6; D.P.D.T. 4/-.
MORSE KEYS, good quality 2/6

KNOBS GOLD ENGRAVED. Walnut or Ivory. 1½in. diam., 1/6 each. "Focus," "Contrast," "Brilliance," "Brilliance—On/Off," "On-Off," "Volume," "Volt-On-Off," "Tone," "Tuning," "Treble," "Bass," "Wavechange," "Radio Gram," "S.M.L. Gram.," "Record-Play," "Brightness," ditto, not engraved, 1/-.



1958 RADIOGRAM CHASSIS

THREE WAVEBANDS FIVE VALVES
S.W. 16m.—50 m. LATEST MULLARD
M.W. 200 m.—550 m. ECH42, EF41, EBC41,
L.W. 800 m.—2,000 m. EL41, EZ40
12 month Guarantee. A.C. 200/250 v., 4-way switch. Short-Medium-Long-Gram. A.V.C. and Negative feedback. 4.8 watts. Chassis 13½in. × 5½in. × 2½in. Glass Dial 10 × 4½in. horizontal or vertical available. 2 Pilot Lamps. Four Knobs, Walnut or Ivory, aligned and calibrated. Chassis isolated from mains.

BRAND NEW £10.10.0 Carr. 4/6.

TERMS: Deposit £5/5/- and 6 monthly payments of £1.
MATCHED SPEAKERS FOR ABOVE CHASSIS: 8in., 17/6; 10in., 25/-; 12in., 30/-.

★ COLLARO ★
HIGH FIDELITY AUTOCHANGER
MODEL RC456

For 7", 10" 12" Records 16 33. 45 78 r.p.m.
4-SPEEDS — 10 RECORDS
WITH STUDIO "O" PICK-UP
BRAND NEW IN MAKER'S BOXES

OUR PRICE £9.15.0 Post free
TERMS: Deposit £5/5/- and 6 monthly payments of £1.
SUITABLE PLAYER CABINETS 49/6
AMPLIFIER PLAYER CABINETS 63/-

GARRARD 4-SPEED SINGLE RECORD PLAYER 4SP

Brand new and fully guaranteed 12 months

AUDIO PERFECTION

Designed to play 16, 33, 45, 78 r.p.m. Records. 7in., 10in., 12in. Lightweight Xtal pick-up, GC2 turnover head, two separate sapphire styli, for Standard and L.P., each plays 2,000 records. Voltage 200/250 A.C.

OUR PRICE £8.0.0 each. Post Free.
Terms: Deposit £3 and 4 monthly payments of £1. Space required 14in. x 12½in. 3in. above and 2½in. below.
Amplifier Player Cabinets, 45/-.

BUILD THIS REPRODUCER BARGAIN
SPECIAL SINGLE PLAYER KIT
FAMOUS MAKER'S SURPLUS STOCKS

4-speed Gram-Pick-up Unit	£4 12 6
Handsome portable case, 17½ x 13½ x 7in.	£2 5 0
Ready-built powerful amplifier with valves and loudspeaker	£3 12 6

All available separately or if all purchased together
£9.15.0 complete kit post free.

HANDY VOLTMETERS

2in. Twin Range 0-25 v., 0-250 v. d.c. with leads and leather case, 12/6 each.

COSSOR COMPANION
MODEL 527/X FOR ALL-DRY BATTERY OPERATION

S.W.1 13.6 to 43 metres, S.W.2 42.8 to 136 metres, Medium 187 to 575 metres.
A fine All-wave receiver giving world-wide reception on three wavebands. Operation is from a single dry battery, very economical low consumption valves 1AC6, 1AJ4, 1AH5, 3C4.

6" ELLIPTICAL LOUDSPEAKER

The cabinet is attractively presented in maroon and beige with gold trimmings.
SIZE 9½" × 6½" × 4½". Leaflet S.A.E.

OUR PRICE £6.15.0 (Battery 19/6 extra)
Carriage and insurance 4/6

TELETRON BAND III CONVERTER

For London, Midland and Northern I.T.A. suitable all T.V. makes. T.R.F. or Superhet. Coils, valves, components, chassis, wiring plans. COMPLETE KIT for mains operation 200-250 v. A.C., £3 10/-. As ABOVE less POWER PACK. Requires 200 v. 20 mA. H.T., 6.3 v., 6 a. L.T. £2 5/-.
Ma.k II cascode £1 extra each Kit.

Volume Controls

Midget size
Long spindles. Guaranteed 1 year. All values 10,000 ohms to 2 Meg. No. Sw. S.P.Sw. D.P.Sw.
3/- 4/- 4/9
Linear or Log Tracks

80 ohm CABLE Coaxial

Semi-air spaced Polythene insulated 2in. dia. Stranded core. Ideal Band III. 9d. yd. Losses cut 50%.
FRINGE QUALITY AIRSPACED ..... 1/6 yd

COAXIAL PLUGS	1/-	DOUBLE SOCKET	1/3
SOCKETS	1/-	OUTLET BOXES	4/6

BALANCED TWIN FEEDER per yd. 6d. 80Ω or 300Ω.
TWIN SCREENED BALANCED FEEDER 1/- yd., 80 ohms.
TRIMMERS, Ceramic, 30, 50, 70 pf., 9d. 100 pf., 150 pf., 1/3. 250 pf., 1/6. 600 pf., 750 pf., 1/9. Philips, 1/- ea.

ALUMINIUM CHASSIS. 18 s.w.g. Plan. undrilled, with 4 sides, riveted corners and lattice fixing holes, with 2½in. sides. 7 × 4in., 4/6; 9 × 6in., 5/9; 11 × 7in., 6/9; 13 × 9in., 8/6; 14 × 11in., 10/6; 15 × 14in., 12/6; and 18 × 16 × 3in., 16/6.

BLACK CRACKLE PAINT. Air drying, 3/- tin.
P.V.C. CONN. WIRE, 10 colours, single or stranded, 2d. yd.
NEON MAINS TESTER SCREWDRIVERS, 5/-.
MULTICORE SOLDER 60/40, 18 s.w.g., 3d.; 16 s.w.g., 4d. yd.

12/6 PURETONE RECORDING TAPE

1,200 ft. on standard fitting 7" metal reels
Spare Reels 7" metal 2/3, 7" plastic, 4/3
FERROVOICE 1,200ft. Plastic Tape 25/- on plastic reels.

SENTERCEL RECTIFIERS. E.H.T. TYPE FLY-BACK VOLTAGES. K3/25 2 kV., 5/-; K3/40 3.2 kV., 7/-; K3/45 3.6 kV., 7/6; K3/50 v. 4 kV., 8/-; K3/100 8 kV., 14/6. 50 c.p.s. Voltage 30% of above.
MAINS TYPE. RM1, 125 v., 60 mA., 5/-; RM2, 100 mA. 6/-; RM3, 120 mA., 8/-; RM4, 250 v. 275 mA., 16/-.
MINIATURE CONTACT COOLED RECTIFIERS. 250 v. 50 ma., 8/6; 230 v. 85 ma., 9/6.
COILS. Wearite "P" type 3/- each. Osmor Midget "Q" type adj. dust core, from 4/- each. All ranges.
TELETRON. L. & Med. T.R.F., with reaction, 3/6.
FERRITE ROD AERIALS. M.W., 8/9; M. & L., 12/6.
T.R.F. COILS A/HF, 7/- pair. **H.F. CHOKES,** 2/6.

JASON F.M. TUNER COIL SET. 28/-. H.F. coil, aerial coil, Oscillator coil, two I.F. Transformers 10.7 Mc/s, Detector transformer and heater choke. Circuit and component book using four 6AM6. 2/-. J.B. Chassis and Dial, 19/6. Complete Kit, £5/18/6.
With Jason superior calibrated dial, £6/15/-.
Mercury Complete Kit £9/19/6.

CONDENSERS. New stock. .001 mfd. 7 kV. T.C.C., 5/6. Ditto 20 kV., 9/6; 100 pf. to 500 pf. Micas, 6d.; Tubular 500 v. .001 to .01 mfd., 9d.; .02, .1, 1/-; .25, 1/6; .5, 1/9; .1/350 v., 9d.; 0.1 mfd. 2,000 v., 3/6; 0.01 mfd. 3000 v. 1/9
CERAMIC CONDS. 500 v., .5 pf. to .01 mfd., 1/-.
SILVER MICA CONDENSERS. 10% 5 pf. to 500 pf., 1/-; 600 pf. to 3,000 pf., 1/3. **CLOSE TOLERANCE** (± 1 pf.) 1.5 pf. to 47 pf., 1/6d. **DITTO** 1% 50 pf. to 815 pf. 1/9; 1,000 pf. to 5,000 pf., 2/-.

NEW ELECTROLYTICS. FAMOUS MAKES.

TUBULAR		TUBULAR		CAN TYPES	
1/350 v.	2/-	100/25 v.	3/-	8+16/450 v.	5/-
2/450 v.	2/3	8+8/500 v.	4/6	16+16/500 v.	6/-
4/450 v.	2/-	16+16/500 v.	6/-	6,000 mfd. 6 v.	6/6
8/450 v.	2/3	CAN TYPES		32+32/350 v.	4/6
8/500 v.	2/9	Clips	3d.	32+32/450 v.	6/6
16/450 v.	3/6	16/450 v.	3/6	64+120/275 v.	7/6
16/500 v.	4/-	32/350 v.	4/-	60+100/350 v.	11/3
32/450 v.	5/6	64/350 v.	5/6	100+200/275 v.	12/6
25/25 v.	1/9	100/275 v.	5/6	1,000+1,000/6 v.	6/6
50/25 v.	1/9	50+50/350 v.	7/-		
50/50 v.	2/-	500/12 v.	3/-		

FULL WAVE BRIDGE SELENIUM RECTIFIERS. 2, 6 or 12 v. 1½amp., 8/9; 2 a., 11/3; 4 a., 17/6.
CHARGER TRANSFORMERS. Tapped input 200/250 v. for charging at 2, 6 or 12 v. 1½ a., 15/6; 2 a. 17/6; 4 a., 22/6.

VALVES All Boxed New & Guaranteed

1R5	8/6	6K8	8/6	EABC80	8/6	EZ81	11/6
1S5	8/6	6L6	10/6	EB91	6/6	HL13	11/6
1T4	8/6	6Q7	10/6	EBC33	9/6	HABC80	12/6
3S4	8/6	6S7	7/6	EBC41	10/6	HVR2A	7/6
3V4	8/6	6SN7	8/6	EBF80	8/6	MU14	10/6
5U4	8/6	6V6G	7/6	ECC84	12/6	P61	6/6
5Y3	8/6	6V6GT	8/6	ECF80	10/6	PCC84	12/6
5Z4	10/6	6X4	7/6	ECF82	10/6	PCF80	10/6
6AM6	8/6	6X5	7/6	ECH42	10/6	PCF82	10/6
6B8	5/6	787	8/6	ECL80	8/6	PCL82	10/6
6BE6	7/6	12A6	7/6	ECL82	12/6	PEN25	6/6
6BH6	10/6	12AH8	10/6	EF39	7/6	PL82	10/6
6BW6	8/6	12AT7	10/6	EF41	10/6	PY80	10/6
6BW7	8/6	12AU7	10/6	EF50	5/6	PY81	10/6
6CH6	10/6	12AX7	10/6	Equip.		PY82	10/6
6D6	7/6	12BE6	10/6	EF50	8/6	8P61	5/6
6F6	7/6	12BH7	10/6	8p1v.		UBC41	10/6
6H6	3/6	12K7	8/6	EF80	10/6	UCH42	10/6
6J5	6/6	12Q7	8/6	EF92	5/6	UF41	10/6
6J6	7/6	35Z4	10/6	EL32	5/6	UL41	10/6
6J7	8/6	80	8/6	EL84	10/6	UY41	10/6
6K6	6/6	954	5/6	EY51	11/6	U22	10/6
6K7	5/6	EA50	1/6	EZ40	10/6	X79	10/6

NEW AND ENLARGED SHOWROOMS NOW OPEN
Our written guarantee with every purchase. Please address all Mail Orders correctly as below

RADIO COMPONENT SPECIALISTS
337 WHITEHORSE RD., WEST CROYDON

OPEN ALL DAY—(Wed. 1 p.m.) CATALOGUE 6d

TEL. THO 1665. Buses 133 or 68 pass door. S.R. Stn. Selhurst. 48-hour postal Service. *P. & P. 1/-, £2 orders post free (Export extra). C.O.D. Service 1/6*

COMMERCIAL TELEVISION CONVERTER

SUITABLE ANY T.V. using lower side band within 35 miles of any I.T.A. Station

NO ALTERATIONS TO SET



Complete with built-in power supply, 200-230 v. A.C. mains. Case 5⅜in. long, 3⅛in. wide, 4⅛in. high. Incorporating gain control and band switch. Complete with Wolsey 3-element I.T.A. outside or loft aerial, 36 feet I.T.A. lead, two plugs (Wolsey 4-element 5/- extra). 25/- deposit plus P. & P. 5/- and 4 monthly payments of £1/5/6. Cash £5/17/-, plus P. & P. 5/-.

Illustrated with cover removed

CONVERTER ONLY Plus P. & P. 2/6

£3/19/6

SIGNAL GENERATOR

Coverage 120 Kc/s.-320 Kc/s. 300 Kc/s.-900 Kc/s. 900 Kc/s.-2.75 Mc/s., 2.75 Mc/s.-8.5 Mc/s., 8 Mc/s.-28 Mc/s., 16 Mc/s.-56 Mc/s. 24 Mc/s.-84 Mc/s. Metal case 10in. × 6½in. × 4½in. Size of scale, 6½in. × 3½in. 2 valves and rectifier A.C. mains 230-250 v. Internal modulation of 400 c.p.s. to a depth of 30 per cent., modulated or unmodulated R.F., output continuously variable 100 milli-volts. C.W. and mod-switch variable A.F. output and moving coil output meter. Grey hammer finish case and white panel. Accuracy plus or minus 2%.



£4/19/6

or 34/- deposit and 3 monthly payments 25/-. P. & P. 4/6 extra

SIGNAL & PATTERN GENERATOR

Coverage 7.6 Mc/s.-210 Mc/s in five bands, all on fundamentals, slow motion tuning audio output, 8 vertical and horizontal bars, logging scale. In grey hammer finished case with carrying handle. Accuracy ± 1%. A.C. mains 200-250 v.



£6/19/6

P. & P. 5/6

Or £2 deposit, P. & P. 5/6 and 4 monthly payments of 27/6.

COMPLETELY BUILT PORTABLE AMPLIFIER

Approx. size 6¾ × 2½ incorporating 2 valves, contact-cooled metal rectifier, bass and treble lift controls and double wound mains transformer 230-250 v. ..... **39/6** Plus P. & P. 3/6.

5" P.M. SPEAKER AND O.P. TRANSFORMER

if purchased with the above 18/6. Plus P. & P. 1/6.

COLLARO 4-SPEED AUTOMATIC CHANGER

Model 456. 10 records. A.C. mains 200/250 v. Turnover crystal head. BRAND NEW. Fully guaranteed (suitable for use with above amplifier). 25/- deposit plus P. & P. 5/- and 7 monthly payments of 25/-.

Cash **£8/19/6** Plus P. & P. 5/-.

4 VALVE ALL-DRY SUPERHET PORTABLE KIT

incorporating ferrite rod aerial

Medium and long waves. In grey leatherette. Size. 9in. x 7in. x 6in. Valve line up 1T4, 1R5, 1S5, 3V4. Complete kit of parts (less batteries)

£5/19/6 Plus 3/6 Post and Packing.

RADIO AND T.V. COMPONENTS (ACTON) LTD.

23, ACTON HIGH STREET, LONDON, W.3

GOODS NOT DISPATCHED OUTSIDE U.K

TELENG

REGD. TRADE MARK

Quality and Technical Excellence bring you . .

The Revolutionary

DOUBLE CHANNEL AMPLIFIER

Type U30D

A Television Boost Amplifier for Showrooms or the Small Communal Aerial Systems in Houses or Flats.

Net Trade Price £15

Gives 30 times (30db) full band width (3½ mc/s ± 1db) gain on each of any two channels to your choice in Bands I and 3. Combined output up to 150 m/v each channel for up to 40 outlets.

Send for literature to:—

TELEFUSION ENGINEERING LTD.

CHURCH ROAD, HAROLD WOOD, ROMFORD, ESSEX

Ingrebourne 2901

---

48 HOUR PROTOTYPE SERVICE

EARLY DELIVERY OF HIGH STABILITY RECTIFIERS

to any rating.

AUTOMAT MOORSIDE, SWINTON, MANCHESTER. Tel.: SWI 4242

CW 4352

TEST METERS & EQUIPMENT

EVERSHED & VIGNOLES WEE MEGGER 250v.

New and unused. Only £10/10 P. & P. 3/-.

★

THE NEW AVO "MULTI MINOR" will test 1,000 v. D.C. or A.C. Sensitivity 10,000 M/V D.C. or 1,000 M/V D.C. This 19 range all-purpose pocket size tester is for ohms, volts and milli-amps. Complete with instructions, test leads, etc. **£9/10/-.**

MARCONI SIGNAL GENERATORS TYPE TF517-F/1. Covering 10–18 Mc/s, 33–58 Mc/s, 150–300 Mc/s. (A number available covering 18–33 Mc/s instead of 10–18 Mc/s band.) Used but in very good condition. Complete with full technical data and instructions. Limited quantity. Unrepeatable at only £12/10/-, carr. 20/-.

MARCONI CRYSTAL CALIBRATOR. Frequency coverage 170–250 Mc/s. Directly calibrated, accuracy .001%. Operation 200/250 volts A.C. Supplied complete with 5 Mc/s crystal and spare set of 5 valves, in original transit case, brand new with instructions. **£4/15/6** each, carr. 10/-.

TEST SET. TS-26/TSM. This volt ohmmeter is the correct tester for EE8 telephones and all standard telephone equipment. Brand new and boxed, with full technical data. **£7/10/-.**

METERS. 0–1 m/a 2in. circular F/M **17/6.** Ditto, 2½in., **25/-.** 0–50 microamps, D.C. m/c., projecting 2½in. round, **49/6.** 0–10 mA. A.C. m/c., rectifiers, F/M 3½in., round, **49/6.** 0–300 v. A.C. 2½in. F/M, **25/-.** 0–200 v. A.C. 3½in. F/M, **25/-.** 0–300 v. A.C. 3½in. F/M, 25/- each. **S. METERS.** 2in. circular calibrated in decibels S mA. FSD, **25/-** each. All brand new and boxed. P. & P. 1/- each.

★

AVO TEST BRIDGE. A.C. mains operated from 200–250 v. Will test resistance from 5 ohms to 50 megohms and capacity from .00001 to 50 mfds. A most useful instrument for everyday uses. Our price ONLY £7/19/6. P. & P. 3/6.

★

TEST METER. Model 420 S.P. (by Radio City Products, U.S.A.). 1,000 ohms per volt for both A.C. and D.C. tests. As previously advertised. **£5/19/6** only, carr., etc., 7/6.

EVERSHED & VIGNOLES MEGGER CIRCUIT TESTER (low reading ohm meter). The perfect meter for continuity and polarity testing. Complete with test leads and ready to use. Brand new. Only **£4/17/6. P. & P. 3/-.**

AVO VALVE TESTER. Complete with Rotary Panel in good order. **£7/19/6,** carr. 7/6.

VALVE TESTER, TYPE 4. 200/230 v. A.C. input. Ex-Govt., in good condition, with descriptive book containing circuit diagram of instrument and how to test valves from 1.4 v. to 40 v With valve-holders for Brit., 4, 5, 7 pin and Octal, U.S., 5 and 7 pin, 1/Octal, side contact, large Brit., 4 and 9 pin. Acorn and diode. Housed in substantial wooden case. **£7/19/6, carr. 10/-.**

RECORD MEGGERS. 500 v. insulation tester, 0-50 megohms. In leather case, good condition. **£9/10/-.**

ACCUMULATORS. Bakelite cased 2 v. 100 ampere, 75 actual. Ex Govt. New and unused. Complete with carrying handle. Ideal for coupling 6 or 12 v. storage batteries. Size 6½in. x 6½in. x 3½in., 15/- each. Carr. 3/6. 3 sent for 50/- or 6 for £5 carr. paid. Ditto, 14 A.H. less handle. 5/6, post 2/-. **CATHODE RAY TUBES.** VCR 139A 2½in., 30/-; 3BP1, 3in., 30/-; 5FP7, 5in., 35/-; VCR97, 6in., 20/-. All new and unused. P. & P. 3/- each.

GRAMOPHONE PLAYER AND AMPLIFIER CABINET. Finished in blue rexine. Complete with hinges and handle which are unassembled. New and unused. Overall size 12½in. x 19½in. x 7½in. SPECIAL PRICE 32/6. P. & P. 3/6.

TRANSFORMERS

RCA OUTPUT TRANSFORMERS. 20 watts, for 5, 7.5, 15 and 500-600 ohms impedance. Primary for a pair of 6L6's in push-pull. (Connection details supplied.) This specially designed first-quality output transformer is the best that money can buy! **OUR PRICE 27/6** each. P. & P. 2/-.

L.T. TRANSFORMERS. Pri. 200–250 v. 50 cycles A.C., Sec. 17.5 v. at 35 amps. **£4/15/-,** carr. 10/-.

TRANSFORMER (FERRANTI). Potted for 0–250 v. 50 cycles tapped primary, sec. 1,250 v., 15 mA. Ideal for oscilloscopes, etc. Size 3⅜ x 3⅜ x 4½in. ONLY 35/-. P. & P. 2/6.

E.H.T. TRANSFORMERS. 3,850 v. at 50 mA. with two additional 4 v. L.T. windings, for 230 v. 50 cycles primary. New and boxed. **£3/15/-.** Carr. 5/-.

TRANSFORMERS. 110–230 v. Pri. Sec. 26 v. tapped to 41 v. at 14 amps. New and boxed. **£3/10/-,** carr. 5/-.

VARIABLE VOLTAGE REGULATOR TRANSFORMERS. Input 230 v. A.C. at 21 amps. Output 57.5 volts in 16 equal steps to 230 v. at 21 amps. Ex Govt., in perfect condition. **£12/10/-,** carr. 15/-.

CAR RADIO VIB. TRANSFORMERS. 6 v. Input 280 v. at 80 mA. H.T. (Ex Philco.). New in perfect condition. **12/6.** P. & P. 2/-. Ditto 12 v., same price.

E.H.T. TRANSFORMER. 20 kV. at 140 m/a. 230 v. 50 cycles primary. New and unused. Ex Govt. Built to the highest specification. **£22,** carr. 30/-.

TRANSFORMER. 1,800–0–1,800 at 1 kVA, 230 v. 50 cycles, primary. Fully tropicalised. New and boxed. **£8/15/-.** Carr. 10/-.

SPEAKERS

TANNOY LOUDHAILERS (EX GOVT.). New and boxed. Impedance 7½ ohms. Handling capacity 8 watts. Price **25/-.** Post 3/6. 2 sent for 50/-. Carr. 5/-.

BAKER SELHURST 12in. P.M. 15 ohms. 15 watts loudspeakers, 30–14,000 c.p.s. Brand new. **£4/10/-.**

RE-ENTRANT LOUDHAILERS. Heavy duty 20 watts all-metal. 15 ohms. Diameter 18in., length 12in. (approx.). By Parmeko. **£6/10/-,** carr. 10/-.

BAKER SELHURST "HI-FI MASTER" SPEAKER UNIT. 12in. 15 ohms, 12 watts. This speaker has been acclaimed by all in the high-quality speaker world as representing the finest value for money. Fundamental resonance approx. 35 c.p.s. Freq. range 20/16,000 c.p.s. Flux density approx. 14–15,000 lines per sq. cm. OUR PRICE **£7/10/-.** Full descriptive literature available.

VITAVOX PRESSURE UNITS. Heavy duty P.M. 20 watt. Brand new. **£4/9/6.** Also ditto, second-hand, in good working order. **40/-,** carr. 7/6.

18/24 v. 10 AMP. BATTERY CHARGERS for 200–250 v. 50 cycles input, metered, switched and fused. As new. **£12/10/-,** carr. 20/-.

A.C.-D.C. RECTIFIER POWER SUPPLY UNIT. 230 v. A.C. 50 cycles input, 100 v. D.C. output max. 10 amps. **£12/10/-,** carr. 20/-. Ditto at 2½ amp. **£4/10/-** carr. 7/6.

SELENIUM METAL RECTIFIERS. F/B.

6 or 12 v. 1 amp.....	7/6	24 v. 1 amp.....	13/6
12 v. 2 amp.....	10/-	24 v. 2 amp.....	20/-
12 v. 2½ amp.....	15/-	24 v. 2½ amp.....	25/-
12 v. 4 amp.....	16/6	24 v. 4 amp.....	30/-
12 v. 6 amp.....	23/6	24 v. 6 amp.....	35/-
12 v. 10 amp.....	40/-	24 v. 10 amp.....	80/-

SPEEDY DELIVERY OF ALL TYPES OF RECTIFIERS HALF WAVE F/B, SINGLE PHASE OR THREE PHASE TO ORDER, FULLY GUARANTEED.

C.M.G. 25 PHOTO CELLS (OSRAM). Brand new. 15/-. P.P. 1/-.

B.C.929A CRT INDICATOR UNIT. Containing 1-3P81 3in. C.R.T., 3-6SN7s, 2-6H6s, 1-6G6, 1-6X5, 1 2X2; 8 valves in all. Ideal for 'scope conversion. New, in original sealed cartons. **70/-,** carr. 5/-.

★★★★★★★★★★★★★★★★★★★★★★★★★★
★ **RCA PLATE TRANSFORMERS. 190 to 250 v. primary. 50–60 cycles. Secondary 4,600/3,500/ MID VOLT at 1.75 k.v.a. Brand new and boxed. £12/10/-. Carr. 10/-.** ★
★★★★★★★★★★★★★★★★★★★★★★★★★★

MINE DETECTOR No. 4. Complete in carrying case with all accessories. Good working order. **£8/19/6,** carr. paid.

PARMEKO MOVING COIL HAND MICROPHONE. 200 ohm imp. Fitted on/off switch, complete with 12 yards flex. **30/-.** P. & P. 2/6.

BENDIX DYNAMOTORS. 28 v. D.C. input, 230 v. D.C. output at 100 mA. New and boxed. **22/-.**

12 v. D.C. ROTARY CONVERTERS. To 230 v. A.C. 50 cycles, 100 watts. Fully tested. **£6/9/6,** carr. 7/6. Ditto 24 v. D.C., **£4/12/6,** carr. 7/6.

MICROPHONE STANDS 3 sections of 18½in. Extends to 56in. Stands on 3 legs which fold together. **21/-.** P. & P. 2/6.

20-WAY TELEPHONE PLUG and INDICATOR BOARDS. Standard G.P.O. fitting. New and unused in sealed cartons. 15/- each, either type.

G.P.O. 19in. RACKS. Heavy channel 4ft. 10in. high, **59/6,** carr. 10/-. Undrilled 14 S.W.G. steel panels for above with hinged cover, finished blue-grey. New and unused. **15/-.** P. & P. 5/-. Post free with rack.

TRANSMITTERS AND RECEIVERS

AIRCRAFT RADIO RECEIVERS BY RCA (Model No. CRV 46151). Freq. 195 kc/s to 9,050 kc/s. (33–1,500 metres) continuous. For 28 v. D.C. input with built-in dynamotor. This 6-valve receiver with 2 R.F. stages and 2 I.F. stages with B.F.O. and C.W. **£10,** or complete with A.C. mains power-unit for loudspeaker or phones. Ready for use, **£15/10/-.** Carr. 10/-.

R.109A RECEIVERS. Freq. range 2–12.0 megs. In good working order. **£4/7/6,** carr. 10/-. A.C. mains 200/250 v. power packs available, **£4,** carr. 5/6.

TRANSMITTER-RECEIVER No. 19. Mk. II complete with 15 valves. Frequency range A set 2–8 meg., B set 230–240 Mc/s, in good condition. **£2/19/6,** carr. 10/6. 12 V. ROTARY POWER UNIT for above, **£1,** carr. 5/-. All leads, headsets, variometers, etc., available.

BENDIX RECEIVER M.N.26. Covers 150–1,500 kc/s on 3 bands. This 11-valve superhet is complete with dynamotor and in perfect condition, **65/-,** carr. 8/6.

COMMAND TRANSMITTERS. 4 to 5.3 megs. Complete with valves and crystal. New and boxed. **35/-,** P. & P. 3/-.

COMMAND RECEIVERS. B.C. 454, 3–6 Mc/s. Brand new, **39/6.** 455, 6–9 Mc/s, **39/6.** P. & P. 3/- each.

RECEIVER R1392 P 104. 15-valve superhet set, 95–150 Mc/s (2 to 3 metres), slow-motion tuning, normally crystal controlled or tunable over 95–150 Mc/s. Receiver front panels made to fit 19in. Rack Mounting. External power supply required, good order. **£5/19/6,** carr. 15/-.

Hours of Business:
9-6 Weekdays
9-1 Saturday

GEE Bros. RADIO Ltd.

ADJOINING LEICESTER SQ. TUBE STATION

15, LITTLE NEWPORT STREET, LONDON, W.C.2. Telephone: GERrard 6794/1453

SPECIAL TERMS FOR QUANTITIES—EXPORT ORDERS PROMPTLY EXECUTED

Excellence in design..

Specialists in Subminiature Telecommunication Components



THE BARB LEAD-THROUGH
One of the range of Barbs that is gaining universal acceptance as a lead-through and stand-off insulator. Particulars of full range on request.

Patents applied for

OXLEY
DEVELOPMENTS CO. LTD.
ULVERSTON, NORTH LANCS
Tel: ULVERSTON 3306

The **VERDIK** QUALITY TEN

10 WATT PUSH-PULL ULTRA LINEAR FEEDBACK

20 GNS COMPLETE



From Your Dealer

AMPLIFIER AND PRE-AMPLIFIER

For details write to

VERDIK SALES LTD.
8 RUPERT COURT, WARDOUR ST., LONDON, W.1. GERrard 8266

SELENIUM RECTIFIERS

40 ma. to 10 amp., 6 v. to 100 v. Bridge, H. Wave or P.P.

WITH OR WITHOUT HIGH-GRADE TRANSFORMER TO SUIT. These are new goods, best makes, not reconstructed Government surplus. Popular types, 6 v. 1 a., 4/-, 2 a., 7/6, 12 v. 2 a., 8/6, 12 v. 1 a., 7/6, 12 v. 3 a., 15/-, 6 a. alloy-finned type, 27/6, 24 v. 0.3 a., 9/-, 0.6 a., 12/6, 24 v. 1 a., 13/6, 2 a., 15/6, 24 v. 3 a., 21/-, 50 v. 1 a., 24/-, 50 v. 2 a., 42/-, 130 v. 300 ma. h. wave, 38/-, 250 v. 300 ma. do., 65/-, 110 v. 1 a. bdge., 48/-, 130 v. 80 ma. bdge., 21/-. Postage 9d. extra each.

CHARGER KITS

No. 1, a kit for 2 v., 6 v., 12 v., 3 amp. transformer, rectifier, ammeter, all high-grade new parts, not rubbish, 52/6, unique convector housing for same, as illust., 12/6, p.p. 3/-, ditto, but 2 amp., 43/-, case 12/6, p.p. 3/-.

Economy 12 v. 3 amp. kit, no ammeter needed, 34/6, p.p. 2/6, all with 12 months' guarantee.

CHAMPION PRODUCTS
43 UPLANDS WAY, LONDON, N.21
Telephone LAB 4457

High Sensitivity Miniature moving coil
LOUDSPEAKER

as used in the Perdio Pocket Transistor Radio. Diameter 2¼". Depth ¾". Impedance 3 ohms. Price, including tax, post and packing, 27/6. Cash with order. For this and other miniature components, apply—

SPECIALISED ELECTRICAL COMPONENTS
9-11, Monmouth Street, London, W.C.2

LOCKWOOD
makers of
Fine Cabinets
and woodwork of every description for the Radio and allied trades
LOCKWOOD & COMPANY (WOODWORKERS) LTD.
Lowlands Rd., Harrow, Middlesex. Byron 3704

METERS

WE CAN SUPPLY WITHIN 7-14 DAYS

a complete range of moving coil—moving iron—electrostatic—thermo-couple—also multirange meters—meggers—pyrometers and laboratory test instruments, etc.

All to B.S.89.

REPAIRS

Delivery 7-14 days

Our skilled craftsmen carry out repairs or convert any types and makes of single and multirange meters.

Where desired, repairs are accepted on contract.

THE V.Z. ELECTRICAL SERVICE
4, LISLE STREET, LONDON, W.C.2
Telephone: GERrard 4861

FOR PROMPT DELIVERY
WAFER SWITCH ASSEMBLIES, CUSTOM BUILT

Banks	PAXOLIN	CERAMIC
	s. d.	s. d.
1	7 4	11 10
2	10 9	23 1
3	14 2	34 8
4	17 0	47 5
5	19 9	58 11
6	22 1	71 6
7	24 2	—
8	28 4	—

When A.B. 11 and 12 way Wafers are required, please add 1/- per bank to above prices.
SPECIALS at time and material plus 50%.
● N.S.F. TYPE "G" SWITCHES.

1 Bank	£1 5 2	Control Plate etc., each 15/-
2 Banks	£1 14 7	
3 Banks	£2 4 1	
4 Banks	£2 13 6	Wafers, each 9/-
5 Banks	£3 3 0	
6 Banks	£3 12 5	

Quotations gladly given for small as well as large quantities, also for special assemblies.

TELE-RADIO (1943) LTD.
189, EDGWARE ROAD, LONDON, W.2.
Paddington 4455/6.

ODDIE FASTENERS

Pat. 507249



THE FASTENER WITH ENDLESS APPLICATIONS—SIMPLE—POSITIVE SELF-LOCKING. MADE IN A VARIETY OF TYPES AND SIZES. SPECIAL FASTENERS TO SUIT CUSTOMERS' REQUIREMENTS. WIDELY USED IN THE RADIO INDUSTRY.

Illustrated brochure and other information will gladly be sent on request.
DEPT. "W.W."

Oddie, Bradbury & Cull Ltd., Southampton
Tel.: 55883 Cables: Fasteners, Southampton

EDDY'S (NOTTM.) LTD.

(Dept. W. W.)

172 ALFRETON RD., NOTTINGHAM

MIDGET BATTERY ELIMINATORS to convert all low-consumption portables for mains operation. Mains input 220/240 v. A.C. H.T. output 85 v. 10 mA. L.T. output 1.3 v., 125 mA. Size 3.7in. x 2.5in. Actually smaller than H.T. battery alone. Amazing price of 55/- plus 2/6 extra post and packing.

SINGLE PIECE THROAT MIKES 1/- each, post etc. 4d. each. Could be used for electrifying musical instruments.

GERMANIUM DIODES 1/- each, 10/- doz. Post extra 3d.

ALL NEW AND GUARANTEED.

Any Parcel insured against damage in transit 6d. extra. | Surplus New & guaranteed **VALVES** A.1 tested before purchase. | Postage and Packing 6d. per valve extra. Over £2 free.

1A7	12/6	6K8G	9/6	12S7	12/11	ECC84	10/6
1C5	10/6	6L6G	7/11	25Y6GT	9/-	ECC85	9/6
1H5	10/6	6Q7G	8/11	25Z4G	9/-	ECF80	10/11
1N5	10/6	6SK7	6/11	35A5	10/11	ECF82	12/6
1R5	7/11	6SN7	7/11	35Z4G	7/6	ECH42	9/11
1S5	7/3	6U4GT	13/11	35W4	7/6	EF39	5/11
1T4	7/3	6V6GT	5/11	35L6GT	9/11	EF40	13/11
3Q4	9/-	6X5GT	7/11	80	8/6	EF41	9/6
3Q5	9/6	7C5	8/11	807	6/6	EF86	12/11
3S4	8/6	7C6	8/11	954	1/6	EF89	9/11
3V4	8/6	7S7	8/11	955	3/11	EF91	7/11
5Y3GT	7/6	10F1	15/11	956	2/6	EL84	9/11
5Z4G	9/11	10F9	11/6	958	3/11	EZ80	8/3
6AM6	7/11	12A6	8/6	DAF96	9/6	EZ81	9/6
6B8G	3/11	12AH7	7/6	DF96	9/6	GZ32	12/6
6BA6	6/6	12AH8	9/11	DL96	9/6	PL82	9/11
6BJ6	7/6	12AT6	9/11	DK96	9/6	PL83	10/11
6AT6	8/11	12J7GT	8/11	DK92	9/6	PY80	8/11
6F1	13/11	12K7G	7/6	EB91	6/11	PY81	8/6
6F15	13/11	12K8GT	13/11	EBC41	9/11	PY82	8/6
6J5G	3/11	12Q7G	7/6	ECC81	8/11	PCC84	8/6
6J7G	7/11	12SJ7	7/6	ECC82	8/11	UCH42	8/11
6K7G	3/11	12SK7	7/6	ECC83	8/11	UY41	7/11

TRANSISTORWISE

"Reco Special" 3 transistor portable receives home and continental stations. Uses specially designed high gain frame aerial, mounted on metal chassis. Months of operation from 3 volt battery. Complete kit with balanced armature output unit and attractive plastic case. Only 65/- including battery. Wiring circuit diagram parts list 1/- P.O.

"Reco" beginners' 3 complete with heavily magnetised Bell-Phone assembly for quality personal listening. 55/- Data 1/-. P.O.

"The Reco" 2 transistor portable receives home and continental stations, uses high gain ferrite tuned aerial. Complete kit with balanced armature output unit and neat plastic pocket case. Only 55/- including battery. Wiring circuit diagram parts list 1/- P.O.



"Reco" all-wave 1 transistor receiver, uses tuned inductance coil and super sensitive Bell phone for quality private listening. Plastic case. Complete kit 29/6 including battery. Wiring circuit diagram parts list 1/- P.O.

RADIO EXCHANGE CO.

27 HARPER STREET, BEDFORD.

TRADE AND MAIL ORDER ONLY.

HOME RADIO OF MITCHAM

for

EDDYSTONE

DIE CAST BOXES

Invaluable for many purposes, and particularly where a high degree of screening is necessary. Each box is supplied complete with close-fitting flanged lid and countersunk screws.

Three Sizes available:

No. 896: size 4½" × 2½" × 1½" ... 6/- *(plus 1/3 postage)*
No. 650: size 4½" × 3½" × 2½" ... 8/- *(plus 1/6 postage)*
No. 845: size 7½" × 4½" × 2½" ... 14/- *(plus 1/9 postage)*

Also the full range of **EDDYSTONE** short wave components, communications receivers and F.M. tuners. **PANDA** transmitters and Minibeams.

WE ARE STOCKISTS FOR:

AVO test meters, including the new 'Multiminor.' **PYE** high fidelity systems. **GOODMANS** speakers. **'B.J.'** tangential tracking pick-up arms. **ARMSTRONG** and **DULCI** radio and amplifier chassis. **BRENELL** tape decks and recorders. **GRAYSHAW** instruments. **PARTRIDGE** and **GILSON** high quality chokes and transformers.

HOME RADIO (MITCHAM) LTD.

187, London Road, Mitcham, Surrey. *Tel: MITcham 3282*

CHAS. H. YOUNG, LTD.

Don't miss these SPECIAL OFFERS

AMERICAN PRECISION HETERODYNE FREQUENCY METERS. Type L.M.14. 125 kc/s to 20 Mc/s. Crystal checked. Complete with calibration book, etc. *VERY LIMITED QUANTITY AVAILABLE.* Absolutely as new. **£25** each.

RACK MOUNTING PANELS, all 19in. long by 5¼in., 7in., 8¾in., or 10½in., 5/9, 6/6, 7/6, 9/- respectively. Post 2/-.

ABSORPTION WAVEMETERS. 3 to 35 mc/s. in 3 switched bands, complete with indicator bulb. 17/6. Post free.

THE NEW GELOSO V.F.O. UNIT. Output on 80/10 metres. Complete with calibrated dial, £7/12/6. Set of three tubes, 24/-.

3in. AERIAL INSULATORS. Ribbed glass. 1/6 each or 6 for 7/6. P. & P. 1/6.

CONDENSERS. 8 mfd. 750 v., 5/6 each Post 1/6.

COPPER AERIAL WIRE. 14 g. H/D 140ft. 17/-, 70ft. 8/6. P. & P. 2/-. Stranded 7/25, 140ft. 10/-, 70ft. 5/-. P. & P. 2/-.

AMERICAN OCTAL BASED 1000 kc/s PRECISION CRYSTALS. 30/- each, post free.

SEMI-MIDGET I.F. TRANSFORMERS (by well-known maker). 10.7 mc/s and 465 kc/s. Can be used as 10.7 mc/s or 465 kc/s singly. Only 9/11 pair per, postage 9d.

HEADPHONES. High resistance (4,000 ohms), very sensitive. Bargain price, only 12/6 pair. P. & P. 1/6.

BRITISH BREAST MIKES (carbon). Ideal for mobiles. 7/6. P. & P. 2/-.

MULTI-WAY CABLE, ¼in. diameter. 7 colour coded wires, any length cut. 1/3 per yard. P. & P. min. 1/6.

10-WAY CABLE (5 pairs). Screened and plastic covered. 2/- per yard. P. & P. min. 1/6.

LOW RESISTANCE HEADPHONES. New ex-W.D. stock. C.L.R. types. Only 8/6 pair. P. & P. 1/6. Special Terms Quantities.

Most comprehensive stock of HiFi equipment in the Midlands, including QUAD, LEAK, W.B., RCA, ROGERS, WHARFEDALE, GOODMANS, etc. Details and demonstrations with pleasure.

NO C.O.D. UNDER £1 *Phone: CENTRAL 1635*

All Mail Orders to Dept. "W." Please print your name and address.

CHAS. H. YOUNG LTD., 110 DALE END, BIRMINGHAM, 4.

Solder with LITESOLD

REGD. TRADE MARK

SOLDERING INSTRUMENTS FOR GREATER SOLDERING EFFICIENCY

● Light weight ● Rapid heating
● High efficiency ● Unbreakable handle ● Bit sizes 3/32in to 3/8in

(In Copper or our long lasting "PERMABIT" or "PERMATIP" types.) All voltage ranges 6/7 v to 230/250 v. 20 models available at prices from 19/6.

British and Foreign Patents. Registered designs. Suppliers to H.M. and Foreign Governments. Agents throughout the world. Write for Booklet No. S.P.5 from sole manufacturers.

LIGHT SOLDERING DEVELOPMENTS LTD.
106, GEORGE ST., CROYDON, SURREY
Tel. : CROydon 8589

RECORD PLAYERS

GRAM MOTORS
AUTOCHANGERS
CABINETS

COLLARO AC.3/554. Three-speed, single player for A.C. mains 200/250 v., cream finish, complete with turnover crystal pick-up, "T" type head. Strictly limited quantity at **£6/19/6**, plus 5/6 carr.
CRYSTAL PICK-UPS fitted Acos HGP37 cartridge. Ultra lightweight. Our Price **37/6**, plus 2/6 carr.
3-SPEED RECORD PLAYERS. Fitted with Acos turnover HGP59 pick-ups with twin sapphire styli, rexine case with lid, fitted clasps and handle. Worth 10 gns. Our Price **27/15/6**, plus 5/6 carr.
3-SPEED GRAM. MOTORS complete with crystal pick-up. Our Price **79/6**, plus 5/6 carr.
REXINE COVERED CABINETS, single player size, suitable most non-auto units, including transcription motors. (Motor board uncut.) Our Price **46/6**, plus 5/6 carr.
PORTABLE RECORD PLAYER CABINETS to house Monarch, Collaro or Garrard 120 Changers, with space for Amplifier and Speaker. Rexine finish in attractive colours. Fitted catches and handles Our Price **£3/5/-**, plus 5/6 carr.
Send stamp for complete bargain list.

RONALD WILSON & CO.
(DEPT. W.W.), 12 BRIDGE STREET, WORCESTER

COPPER WIRE

ENAMELLED, TINNED, LITZ, COTTON AND SILK COVERED. RESISTANCE WIRES, 1 oz., 2 oz., and 4 oz. REELS. All gauges available.
B.A. SCREWS, NUTS, WASHERS, soldering tags, eyelets and rivets. EBONITE and BAKELITE PANELS, TUFNOL ROD, PAXOLIN TYPE COIL FORMERS AND TUBES, ALL DIAMETERS. Latest Radio Publications.
SEND STAMP FOR LIST. TRADE SUPPLIED.

G.E.C., B.T.H. & WESTINGHOUSE GERMANIUM CRYSTAL DIODES

1/- each. Postage 3d.

Diagrams and three Crystal Set Circuits Free with each diode.
A large purchase of these fully GUARANTEED diodes from the manufacturers enables us to make this attractive offer.

POST RADIO SUPPLIES
33, Bourne Gardens, London, E.4

ENGINEERS!

Whatever your age or experience, you must read "ENGINEERING OPPORTUNITIES." Full details of the easiest way to pass A.M.I.Mech.E., A.M.I.C.E., C. & G. (Electrical, etc., General Certs. etc., on "NO PASS—NO FEE" terms and details of Courses in all branches of Engineering—Mechanical, Electrical, Civil, Auto, Aero, Radio, etc., Building etc. If you're earning less than £15 a week, tell us what interests you and write for your copy of "ENGINEERING OPPORTUNITIES" today—FREE

144 PAGES Free!

B.I.E.T.
357 College House, 29-31, Wright's Lane, London, W.8.
BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY

METERS

All types
Any make

Single and Multi-range repaired and recalibrated

Meters 2" to 6" supplied from stock
Scaled to requirements.

E.I.R. INSTRUMENTS LTD.
329 Kilburn Lane, London, W.9
Tel.: LADbroke 4168

WIREWOUND RESISTORS

Eureka wound on strip. 1 to 1,000 ohms: 1% 2/9; 0.5% 3/-; 0.2% 4/3; 1K to 5K, 1% 3/3; 0.5% 3/6; 0.2% 4/9. 5K to 20K, 1% 4/-; 0.5% 4/3; 0.2% 6/-. 0.75W rating. Your value wound to order, quick delivery. Special quotation for quantities.

SHUNTS

Wire-ended Eureka shunts, three ranges, 1% accuracy, for inclusion in customers own apparatus. For 1 mA. 100 ohm meter, ranges 10, 100, 1,000 mA. For 500 μA 500 ohm meter, ranges 5, 50, 500 mA. Price 8/6 each.

PLANET INSTRUMENT CO.
25, DOMINION AVENUE, LEEDS, 7.

NEW BOOKS ON RADIO & TELEVISION

The A.R.R.L. Antenna Book. Postage 1/-	18/-
Understanding HI-FI Circuits, by N. Crowhurst Postage 1/3	23/-
Transistors and Crystal Diodes, by Bettridge. Postage 4d	5/-
Radio Servicing Fault Finding, by Patchett. Postage 4d	5/-
Radio Control Handbook, by Howard McEntee. Postage 1/-	18/-
Magnetic Recording Wire and Tape, by Quartermain.. Post 6d.	4/6
Industrial Television, by H. A. McGhee. Postage 9d.	15/-
Transistor Techniques, by Gernsback Library. Postage 9d	12/-
Radio Upkeep and Repairs, by Witts. New edition.. Postage 9d.	15/-
Valve and T.V. Tube Equivalents, by Babani. Service types, etc. Postage 6d.	5/-

UNIVERSAL BOOK CO.
12 LITTLE NEWPORT STREET, LONDON, W.C.2 (adjoining Lisle St.)

TRANSISTOR AMPLIFIER
Type TA2B



Max. Sens'ity 2 Microvolts RMS
Audio Range — Tuned or Wide-Band. Noise 3%. Portable.

Write for leaflet A15.

Microwave Instruments Limited
North Shields, Northumberland

NEW METERS

(by well-known manufacturers)
to your requirements

7-14 DAYS DELIVERY
A.I.D. APPROVED

IEC **METER REPAIRS by SPECIALISTS**

Phone HOP 1408
Prompt and Efficient Service

INSTRUMENTS ELECTRICAL CO.
107, Newington Causeway, London, S.E.1

TELEVISION INSTRUMENTATION

DEVELOPMENT ENGINEERS

DUTIES: To undertake the design and development of test equipment for television, including work on special television camera applications. Considerable personal responsibility and freedom is given, and there are no set rules regarding the number of people engaged on a project, the allocation of project leaders, etc.

QUALIFICATIONS: The ability to design and develop equipment and aggressively progress a project through to the stage where a model is made and the information is available for a production drawing office. Candidates should preferably be of degree standard, or Corporate Members of one of the Professional Institutions, but consideration will be given to others who have considerable practical experience in the field. The ability to progress the project through to a satisfactory conclusion is the prime requirement. Due to expanding activities men with drive and initiative can be sure of progressive advancement.

Comprehensive pension and assurance schemes are in operation, and Canteen and Social Club facilities are provided.

Call any day including Saturday mornings at:

MARCONI INSTRUMENTS LTD., LONGACRES, HATFIELD ROAD, ST. ALBANS, HERTS.

or write giving full details to Dept.: C.P.S. Marconi House, 336/7, Strand, London, W.C.2, quoting reference WW 2970N.

MARCONI INSTRUMENTS LTD.,

TECHNICAL PERSONNEL REQUIRED

Senior & Junior Electrical Design Engineers

SENIOR & JUNIOR MECHANICAL DESIGN ENGINEERS

DUTIES: To undertake the design of Test Equipment covering practically the whole electronic field, including Telecommunication, Guided Weapons, and Nucleonics. Considerable personal responsibility and freedom is given, and there are no set rules regarding the number of people engaged on a project, the allocation of project leaders, etc.

QUALIFICATIONS: The ability to design equipment and aggressively progress a project through to the stage where a model is made and the information is available for a production drawing office. Senior engineers are usually of B.Sc. standard with practical experience in measuring techniques, while Junior engineers are often Graduate Members of one of the Professional Institutions, or have similar qualifications, but this is in no way mandatory. The ability to progress the project through to a satisfactory conclusion is the prime requirement. Due to expanding activities, men with drive and initiative can be sure of progressive advancement.

Comprehensive pension and assurance schemes are in operation, and Canteen and Social Club facilities are provided.

Call any day including Saturday mornings at

MARCONI INSTRUMENTS LTD., LONGACRES, HATFIELD ROAD, ST. ALBANS, HERTS.

or write giving full details to Dept. C.P.S., Marconi House, 336/7, Strand, London, W.C.2, quoting reference WW 2970M.



TRANSFORMERS

All 4 types below for 220/240 v. input **£4/5/-** each. Carr. average 6/- after delivery. Double Wound.
(1) 3, 6, 9 & 12 v. at 6.5 amps.
(2) 6, 12, 18, 24 & 30 v. at 12 amps.
(3) 5 v. at 300 a.
Auto Wound. (4) 110/120 v at 6.5 amps. We have a large selection of Transformers, specially with Low Volts/High Amps. output.

"POP" RIVET GUNS (Lazy Tongs)

Easily operated tool for riveting sheet metal, plastic, hardboard, etc. Useful for chassis building etc. With universal collet to take all rivet sizes. **£4/11/-.** Send for illustrated leaflet.

"POP" RIVETS

1/8in., 5/32in. and 3/16in., **10/-** per 250, **£1** per 1,000 of one and the same size. Mixed "Pop" rivets **13/-** per 500, **19/-** per 1,000. Send stamp for leaflet.

FLEXIBLE DRIVES

4ft. 6in. long with ¼in. drill chuck. For drilling, polishing and light grinding. Runs in both directions. Can be used with Wolf and other hand drills. **45/-.**

NEST OF DRAWERS

Overall: 6¾in. wide × 5in. deep × 10¼in. high. 12 drawers, each 3in. wide × 4¼in. deep × 1¼in. high. Useful storage for radio components, nuts, bolts and other small parts. Stout sheet steel, green enamelled. **20/-.** P. & P. 3/-

HARMSWORTH, TOWNLEY & CO.

2 JORDAN STREET, MANCHESTER. 15

THERMOSTATIC SOLDERING IRON

CECO — 70 watt

Instrument size

HEATS UP QUICKLY—1½ mins.—STAYS HOT—but NEVER OVERHEATS—BIT DOES NOT CORRODE OR NEED CLEANING

WEIGHT—4½ ozs.

(Excluding Flex)

ALL PARTS INTERCHANGEABLE

The Thermostat is easily adjusted to suit the grade of solder and keeps the temperature to within 15°C. It incorporates a microswitch giving snap action on-off with minimum electrical interference. Eliminates dry joints and damage to insulation. Element and bit last much longer

LIST PRICE 85/- each

BRITISH PATENT No. 663214

Available from Manufacturer:—

CARDROSS ENGINEERING CO. LTD.

LEVENFORD WORKS, DUMBARTON

Phone: Dumbarton 655

Fidelia

HAND BUILT



The Fidelia Imperial gives V.H.F. reception plus all the facilities of a fine audio amplifier. The gramophone pre-amplifier suits all types of pick-ups and has recording correction for L.P., R.I.A.A. and 78 curves. Independent Bass and Treble Controls are fitted with approx. 24db total range. Tape jacks can be fitted. Hand built throughout and available with either our Major power amplifier at **£38** or our Junior power amplifier at **£34.**

Other models in our range include:
Fidelia AM/FM Major. 12 valves. Tuned R.F. stage on all wavebands. VHF, S, M, and L wavebands. Gram. pre-amplifier and input corrector for all pick-ups. Separate 9 watt power amplifier **£44.**

Fidelia De-Luxe. VHF reception plus normal wavebands, 7 watt push-pull output. Separate bass and treble controls. 9 Ke filter variable selectivity on M and L wavebands. **£34/10/-.**

Full details willingly on request (6d. in stamps is appreciated.)

ELECTRO Acoustic DEVELOPMENTS

2 AMHURST ROAD, TELSCOMBE CLIFFS, Nr. Brighton, SUSSEX

Tel. Peacehaven 3156

YOUR METER DAMAGED?

Leading Electrical Instrument Repairers to the Industry

Contractors to the Ministry of Supply and General Post Office. Repairs by skilled craftsmen of all makes and types of Voltmeters, Ammeters, Microammeters Multirange Test Meters, Electrical Thermometers, Recording Instruments, etc. Quick deliveries—for speedy estimate send defective instruments by registered post to:—

L. GLASER & CO. LTD.
Electrical Instrument Repairers
97-100 ALDERSGATE STREET, E.C.1
(Tel.: MONarch 6822)

CABINETS
for
Goodmans, G.E.C., Wharfedale, Jensen.

STANDARD BASS REFLEX CABINETS
Walnut, Mahogany and Oak, as illustrated (34" high)
12" Speaker Model £10.0.0
10" Speaker Model £9.10.0
8" Speaker Model £9.0.0
Open till 5.30 Saturdays.

A. DAVIES & CO. (Cabinet Makers)
3 Parkhill Place, off Parkhill Road, London, N.W.3. GULLIVER 5775

We manufacture all types of
SMALL TRANSFORMERS and CHOKES with MUMETAL and RADIOMETAL CORES either with or without **MUMETAL SCREENS.**

Microphone, Pickup, Line input, Output, Computer, Rectifier, High Fidelity, Midget, Transistor, Vibration, Seismic, Instrument, Photocell, Recorder, Bridge and Experimental Transformers of all kinds.
Frequency bands in the range 1 c/s to 150 kc/s. Designs produced against Clients' electrical requirements.
Quick delivery. Large or small quantities. Contractors to G.E.C., Rolls-Royce, Decca, H. J. Leak, R.C.A., M.O.S., Admiralty, etc

E. A. SOWTER LTD.,
7 Dedham Place, Fore Street, Ipswich, Suffolk. Tel.: Ipswich 52794.



PULLIN
SERIES 100
HIGH RESISTANCE
TEST METER
AC/DC 10,000 ohms/volt
21 RANGES
100 microamps to 1000 v
Complete in die-cast case with test leads, clips & prods

CASH PRICE **£12-7-6** or Deposit £2-10-0 & nine further monthly payments of £1-4-6.
FULLY GUARANTEED
Illustrated brochure free on request.

FRITH RADIOCRAFT LTD
69-71 CHURCH GATE LEICESTER
& 28 HIGH ST NEWPORT PAGNELL Bucks

LEEVERS RICH
PRECISION MAGNETIC RECORDERS
for
STUDIOS - INDUSTRY - RESEARCH
LEEVERS-RICH EQUIPMENT LTD.
[illegible] Hampstead Rd, London, N.W.1 EUSton [illegible]

TRANSISTORS ARE OUR SPECIALITY
FULL TECHNICAL ADVICE SERVICE
ALL PRICES ARE POST PAID
Transistors. Red Spot, 8/-. Red/Yellow Spot (R.F.), 21/-. Green/Yellow (Audio), 10/-
Crystal Diodes 1/3.
7-Transistor Portable Circuit, 1/6.
3-Transistor Radio (L./M.W.) Circuit, 11d.
Complete kit £3.17.6. Speaker extra.
ELECTROLYTICS—GUARANTEED
16 mfd. 450 v. 150 mA. 1¾in. x 1in., 2/4 each.
8-8 mfd. 450 v. 100 mA. 1¾in. x 1in., 2/9 each.
8-16 mfd. 450 v. 100 mA. 1¾in. x 1in. 2/9 each.
50 mfd. 50 v. 1/6. 25 mfd. 25 v. 1/8.
Condensers: .01 mfd. 1,000 v., 6d. .1/350 v., 8d.
Resistors: All Values 10% ½ watt, 6d. each.
TERMS: C.W.O. or C.O.D (over £2).
FULL COMPONENT LIST 6d.
OAKFIELD RADIO
44 OAKFIELD ROAD, STOCKPORT

COAXIAL CONNECTORS UG TYPE
21-B/U, 58/U, 290/U, etc.
According to JAN & MIL Specifications for Aircraft, etc.
Full list available. Send your requirements. Overseas Enquiries Invited
N.A.R. Agencies Ltd.
40 King's Road, London, S.W.3

RADIO & ELECTRONIC ENGINEERS . . .

The MORSE CODE is still, and always will be, the basic Code for individual Signalling, whether on visual or telecommunication circuits.
So add this simple and interesting subject to your qualifications. Apart from the pleasure derived from this extra knowledge, it counts for much when a step up the ladder is under consideration.
Write for the CANDLER BOOK OF FACTS and see for yourself how fascinating the Candler method of teaching the Morse Code will prove.

CANDLER SYSTEM CO.
(56W) 52b ABINGDON ROAD, LONDON, W.8
Candler System Co., Denver, Colorado, U.S.A.

RESISTANCE WIRES
EUREKA - CONSTANTAN
MOST GAUGES AVAILABLE
NICKEL-CHROME - MANGANIN
POST RADIO SUPPLIES
33 Bourne Gardens, London, E.4
Phones: CLissold 4688/2021

TANNOY
SOUND EQUIPMENT
Tells you what's going on clearly
WEST NORWOOD · S.E.27
Telephone: GIPsy Hill 1131 (7 lines)

Tape Amplifiers for **Wearite, Collaro** and all other Decks, "Miteeamp" 2½ watts **18gns.** 6 watts U/L. "Lodestar" **25gns.** Transistor tone control preamps, etc., Mixer units, etc. Write,
HARDING ELECTRONICS
120a Mora Road, Cricklewood, London, N.W.2
Phone: GLA 1770

HALT!
Have you seen our illustrated list? It contains Radios, Components, Tape Recorders & accessories, Test Equipment, Valves & C.R.T.s, Tools and many other items too numerous to mention here. Send 6d. (P.O. or stamps), for your copy, from:
G. M. JONES (Dept. W.W.),
453 Soundwell Road, Kingswood, BRISTOL

TRANSFORMERS for MULLARD 510 AMPLIFIER



Fully Shrouded Upright Mounting. Fully Guaranteed, interleaved and Impregnated. T.56 300-0-300 v. 100mA., 6.3 v 2 a. cc., 6.3 v. 1 a. 27/- P/P. 2/6. T55 for 510 Amp. and Tuner 300-0-300 v. 120 mA., 6.3 v. 2.5 a. ct., 6.3 v. 2.5 a. ct., 6.3 v. 1a. 32/-. P/P 2/6. Primaries for above 240-220-200; 0-10 v. 50 c/s. T44 Ultra-Linear Output Transformer 8,000 ohm. with 43% tappings for 510 Amp. 30/-. P/P 2/-.
SPECIAL OFFER T44 and T55 59/-. P/P 3/6.
All carefully made to conform to specifications.
SOUTHERN TECHNICAL SUPPLIES
13 NORTH STREET, PORTSLADE, SUSSEX
Tel.: HOVE 47223

GALPINS

As announced in November we have taken over the Transformer Section of this business. For years we have wound all Galpins transformers and can promise you the same efficiency and quality as in the past.

JEFFERY TRANSFORMER CO.
199 Edward Street, New Cross, London, S.E.14
TIDeway 4458

PURCHASE HIRE OR HIRE-PURCHASE
VORTEXION Tape Recorders and P.A. Equipment, etc.
also Recordings—Tape to Tape/Disc Service
GRIFFITHS HANSEN (Recordings) LTD.
32-33 GOSFIELD STREET, LONDON, W.1
Phones MUSeum 2771/0642

EXPERIENCED
TRANSFORMER DESIGN ENGINEER

required for interesting range of problems including:

MAGNETIC AMPLIFIERS AND PULSE TRANSFORMERS

A Degree or Higher National Certificate together with some experience in the above fields is preferable.

Apply to: **Personnel Officer, COSSOR RADAR & ELECTRONICS LTD., 22, Highbury Grove, N.5.**

Tomorrow's Radar systems...

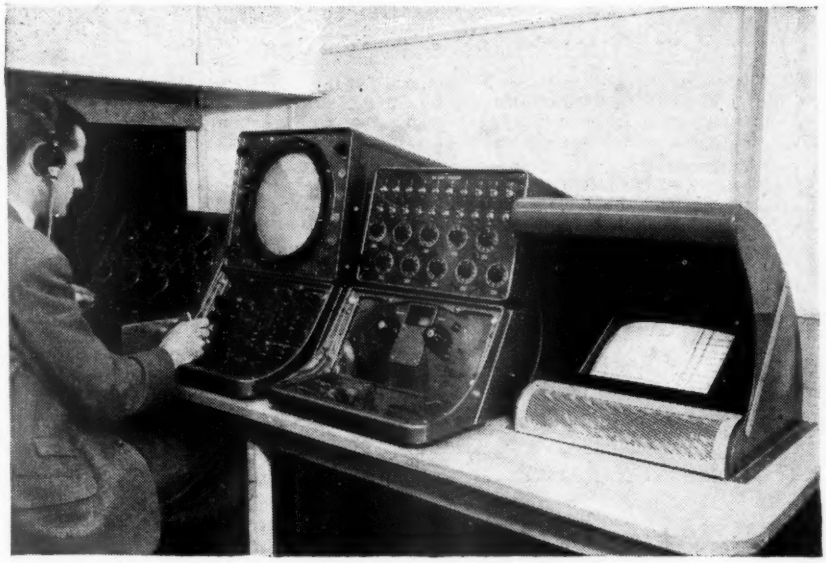

If you are an outstanding Circuit Engineer and would like to work on the most advanced radar display and data processing equipment, write to :-

DECCA RADAR LIMITED,

Display & Data Laboratories,

Tolworth, Surrey.

...needs today's finest engineers!

There's a future at

FELGATE RADIO LTD.

for a

RADIO ENGINEER

We need a man for general factory and laboratory duties including the design of domestic radio. Academic qualifications are not essential, but he must have had experience in some form of design or close association with production.

Applications please to the Managing Director, Felgate Radio Ltd., Felgate House, Studland Street, Hammersmith, W.6.

29

RADAR ENGINEERS

The SHAPE Air Defense Technical Centre has a few vacancies for graduate engineers and physicists with several years' experience in Radar Engineering. The projects to be undertaken will be concerned mainly with radar receivers, with special emphasis on refined detection techniques and the application of modern methods thereto.

The basic salaries will be based on the European average for corresponding background and experience. Successful applicants from foreign countries will benefit by a number of privileges including a foreign allowance of the order of 70% of the basic salary, and reimbursement of the cost of moving their families and household effects to The Hague and back to their country of origin on termination of contract. The total income is tax free in The Netherlands.

Applications, containing detailed information on training and past experience, should be sent as soon as possible to:

The Director, SADTC,
P.O. Box 174, The Hague,
The Netherlands.

ENGLISH ELECTRIC COMPANY LIMITED

Guided Weapons Division

DRAUGHTSMEN & DESIGNERS

Following the announcement of contracts for the introduction of the THUNDERBIRD missile into service with the R.A.F. and the Army, there is an increasing demand for Draughtsmen and Designers at both our Luton and Stevenage establishments.

Applications are invited for positions in our electronic, servo-mechanism and instrument departments from electronic, electrical, and mechanical draughtsmen who have had at least two years relevant draughting experience and who have served an engineering apprenticeship and obtained an Ordinary National Certificate.

For some of the more senior vacancies about seven years' experience is essential.

The Company operates a comprehensive pension scheme. In most cases HOUSING may be available, BUT EARLY APPLICATION IS ESSENTIAL. Please write, giving full details to **Dept. C.P.S., 336/7, Strand, London, W.C.2, quoting Ref.: WW 699J.**

R.G.D.

The Radio Gramophone Development Co. seeks Senior and Junior Engineering Staff for work on Television Development.

Applicants should have experience in the following fields:—

Television Receiver Circuit Development.
Radio and Television Mechanical Development.
Colour Television.
Television Components.

These posts are permanent and progressive and occur due to expansion of an established and successful team.

Apply in writing, stating age and salary required to:—
Technical Director, R.G.D. Co., Ltd., Eastern Avenue West, Romford, Essex.

ELECTRONIC ENGINEER

Excellent prospects exist in a new group being formed to cater for all technical aspects of electronic equipment being manufactured. This involves development, technical supervision of manufacture and testing, together with the provisioning of a test specification. Candidates should have design experience in one or more of the following—

Broad Band Amplifiers
Pulse techniques
Transformer design
Microwave techniques
V.H.F. techniques
Transistor circuits.

Qualifications should include a Degree or Higher National in Physics or Electrical Engineering, although where candidates have exceptional practical ability, this will be accepted. They should also have the personality necessary to liaise with customers on technical matters. Housing assistance and Superannuation Scheme. Apply: **Personnel Manager,**
THE GENERAL ELECTRIC CO. LTD., Broad Oak Works, The Airport, Portsmouth.

SIR W. G. ARMSTRONG WHITWORTH AIRCRAFT LIMITED

require

TECHNICAL REPRESENTATIVES

These positions entail liaison work in the Service Department between the Company and the Admiralty in connection with the Seaslug development programme.

Applicants must have H.N.C. Electronics or equivalent, with a mechanical background. Attractive salaries are offered together with an excellent pension scheme.

All applications will be treated in the strictest confidence, and should be addressed in the first instance to the Labour Manager, Sir W. G. Armstrong Whitworth Aircraft Ltd., Baginton, Near Coventry, Warwickshire.

Research Development

Design and Prototype Development of Audio-Electro Devices and Equipment. Box No. 2336 *c/o "W. World"*

W. H. SANDERS (ELECTRONICS) LIMITED

have vacancies for

1. **Microwave Engineers** with experience in Microwave Measurements to work on design of new instruments and application of Magnetic Materials Qualifications HNC or equivalent in Electrical Engineering.
2. **Development Engineers** required for our Industrial Electronics Group.

Qualifications AMIEE or HNC.

The person selected will be responsible for all engineering prospects of an important industrial product. Knowledge of low speed timing circuits is an essential

Experience of electric welding techniques would be an advantage.

Applications giving details of age, experience and qualifications should be addressed to:

Personnel Officer,
W. H. Sanders (Electronics) Limited, Gunnels Wood Road, Stevenage, Herts.

INDEPENDENT TELEVISION AUTHORITY

Applications are invited for the post of General Assistant to the Senior Engineer Transmitters in the Operations and Maintenance department at its London headquarters. Applicants should be fully qualified professional Engineers and possess a first-class technical knowledge of radio engineering and have had practical experience of specification, design, construction, installation and testing of VHF vision and sound transmitters and ancillary equipment. Some experience of station operation would be useful. The salary scale for this appointment is £1,325—£1,705. Contributory Pension Scheme in force. Four weeks' annual leave. Applications should be submitted to the Personnel Officer, **14 Princes Gate, London, S.W.7.**

ELECTRICAL ENGINEERS or PHYSICISTS

required for work on a special project, involving the development of a modern, complex, microwave electronic valve. Minimum qualification O.N.C. or Inter B.Sc.

Previous experience in this field is not essential.

The vacancies give opportunities for candidates to become experienced in advanced microwave techniques.

Apply quoting M/I to
PERSONNEL OFFICER
M.O. VALVE CO., HAMMERSMITH, W.6

A subsidiary of The General Electric Company.

RADIO

Development Engineers required for Senior and Junior positions. C. & G. I. Telecommunications or other recognised qualifications essential. Vacancies offer opportunity to work on interesting projects in well equipped, modern laboratory, and are permanent and progressive.

Apply in writing in first instance to:—
Employment Officer,
THE EVER READY CO. (G.B.) LTD.
Radio Dept., Park Lane, Wolverhampton.

RADIO TECHNICIANS
IN
CIVIL AVIATION

A number of appointments are available for interesting work providing and maintaining aeronautical telecommunications and electronic navigational aids at aerodromes and radio stations in various parts of the United Kingdom.

Applications are invited from men aged 19 or over who have a fundamental knowledge of radio or radar with some practical experience. Training courses are provided to give familiarity with the types of equipment used.

Salary £600 at age 25 rising to £705. The rates are somewhat lower in the Provinces and for those below age 25. Prospects of permanent pensionable posts.

Opportunities for promotion to Telecommunications Technical Officer are good for those who obtain the O.N.C. in Electrical Engineering or certain City and Guilds Certificates. The maximum salaries of Telecommunications Technical Officers are Grade III £870, Grade II £1,030, Grade I £1,250.

Apply to the Ministry of Transport and Civil Aviation (ESB1/RT), Berkeley Square House, London, W.1, or any Employment Exchange (quoting Order No. Westminster 2109).

Old established and progressive manufacturers of electronic instruments invite applications for the appointment of:

DEVELOPMENT ENGINEER

to work on the design of miniature transistorised electro-acoustic devices.

The Company has a leading position in its fields and its products are marketed throughout the world. The factory is situated in Central London.

Candidates should have O.N.C. or H.N.C. in electrical engineering, electronics or physics or equivalent qualifications, and experience in the design of small electro-acoustic devices. Experience of transistor applications is desirable. Age preferably around 30. Apply stating age and giving full details of education, training and experience and present or last salary to—Box No. 3578 c/o "W. World".

VACANCIES IN GOVERNMENT SERVICE

A number of vacancies, offering good career prospects, exist for:—

Radio Operators—Male
Cypher Operators—Male and Female

Apply, giving details of education, qualifications and experience, to:—

Personnel Officer, G.C.H.Q. (FOREIGN OFFICE)
53 Clarence Street, Cheltenham.

CHIEF TEST ENGINEER

is required to take charge of a department concerned with the production testing of electronic equipment of considerable variety and technical interest. Substantial experience is essential, preferably in a similar capacity, and familiarity with A.I.D. requirements would be an advantage. Technical qualifications to H.N.C. standard, or the equivalent, are desirable.

Appointment is pensionable and carries an attractive salary. It offers excellent prospects and an opportunity to work on a variety of interesting projects.

Applications, which will be treated in strict confidence, should include details of qualifications and experience, and give an approximate indication of the salary required. They should be addressed to:—

Personnel Manager,
R. B. PULLIN & CO., LTD.,
Phoenix Works,
Great West Road,
BRENTFORD, Middx.

TEST ROOM
PERSONNEL REQUIRED

Duties: Testing and calibrating a wide range of telecommunication and industrial electronic instruments.

Qualifications: We shall be pleased to receive applications from any man with or without academic qualifications, who is able to demonstrate suitable experience and training.

Call any day including Saturday mornings at

MARCONI INSTRUMENTS LIMITED
LONGACRES, HATFIELD ROAD
ST. ALBANS, HERTS.

or write giving full details to Dept. C.P.S., Marconi House, 336/7, Strand, London, W.C.2, quoting reference WW 297OL

METROPOLITAN-VICKERS ELECTRICAL COMPANY LTD.
DEVELOPMENT ENGINEERS
for
ELECTRONICS DEPARTMENT

Graduate Engineers or Physicists with two or more years experience in the field of microwave techniques or microwave receiver systems are required for theoretical or practical work in the development laboratories of the Radar Division. Applicants are requested to write, quoting reference F.10 to:—

Personnel Manager,
Metropolitan-Vickers Electrical Co. Ltd.,
Trafford Park, Manchester, 17.

ELECTRONIC ENGINEER

required in the Electrical Department of The Steel Company of Wales Ltd. (Steel Division).

The successful candidate will be responsible for the development and maintenance of electronic equipment for general steelworks applications. A considerable degree of initiative is required and the ability to work closely with manufacturers on new applications. The successful maintenance of the equipment is of vital importance.

Applicants should possess a University Degree or equivalent in Electrical Engineering, preferably with Electronics as a subject in the final year. Previous practical experience in manufacturing or development work desirable.

Those wishing to apply should write giving fullest possible details of age, experience, qualifications and present salary, quoting the reference 303/W. to:—

Superintendent, Personnel Services,
THE STEEL COMPANY OF WALES LTD.,
Abbey Works, PORT TALBOT, Glam.

ELECTRICAL LABORATORY ASSISTANT
required by
"ENGLISH ELECTRIC"
STAFFORD

The Company wishes to engage a Laboratory Assistant capable of operating C.R.O. and electromagnetic oscillographs.

The laboratory in question is concerned with high power development tests on heavy electrical equipment.

Applicants should preferably have some experience of measuring techniques and they must be capable of maintaining measuring equipment on their own initiative.

Please write giving full details to the Central Personnel Services, Marconi House, 336/7 Strand, London, W.C.2. Quoting Ref. WW1206B.

Bakelite Back Cases for Avometer model 40 ..... 7/6 each
Bakelite Front Panels for Avominor Universal ..... 7/6 each
Postage 1/6



ARMATURE DROP TESTERS (Ex A.M Ref. 5G/549)

For testing Motor and Generator Armatures, max. dia. of commutator appr. 4in.; max. overall dia. 7in.; max. length appr. 15in. PRICE £5/10/-. Packing and carriage 15/-

EDDYSTONE 358X COMMUNICATION RECEIVERS

40 kc/s to 31 mc/s with ten plug-in coils.

PRICE: Aerial Tested, complete with ten coils..... £12 10 0
Packing and carriage..... £1 10 0

Coils for the above Receiver available separately or in sets of ten in wooden tray. Price per coil 17/6. Complete set of 10 coils £6/10/0.

A.F. OUTPUT POWER METERS

Marconi TF-340: F.S.D. 5mW to 5 watts. Impedance 25-30-40-50-60-80-125-150-200 ohms; Impedance Multipliers 0.1-1.0-10-100.
PRICE, fully overhauled and guaranteed £32 10 0

Taylor 160 A; F.S.D. 0.25mW to 2.5 watts. Impedance 2.5-5-100-125-150-600-4000-8000-10,000-20,000 ohms.
PRICE, fully guaranteed £21 0 0

BEAT FREQUENCY OSCILLATORS

Furzehill No. 1, 0 to 10,000 c/s mains operated £22 0 0
General Radio, Portable type 613-A, 0 to 12,500 c/s, battery operated... £25 0 0
Marconi TF-195L, 0 to 40,000 c/s, mains operated £65 0 0
Marconi TF-195L4, Wide Range, 0 to 150 kc/s, mains operated..... £72 0 0
General Radio Type 700-A Wide Range, 0 to 5 Mc/s, mains operated £55 0 0

FOSTER MODEL "D" POTENTIOMETER

Portable Thermocouple Potentiometer with fully divided slidewire Range 0 to 20 and 0 to 60mV. Calibrated in degrees C for Pt-Pt13%Rh, Chromel Alumel and Iron Constantan Thermocouples.
PRICE complete with Standard Cell £32 0 0
Ditto with potential divider £35 0 0
Packing and carriage..... £1 0 0

AIRCRAFT BOND TESTERS 5G/2126, complete with matched leads appr. 6 and 60ft. long. £8/15/-.
Alkaline Accumulator £3/10/-.

T.C.S. COLLINS TRANSMITTING AND RECEIVING EQUIPMENT

Frequency range 1.5 to 12 mc/s. Crystal controlled or V.F.O. operation. Output: 20W voice or 40W C.W.

The installation consists of:
Transmitter, Receiver, Remote Control Unit with built-in loudspeaker, Aerial loading coil, set of three interconnecting cables, Power Supply Unit for 12, 24, 110 or 230V D.C. or 230V A.C., Headphone, Hand Microphone and Key.

Comprehensive range of spares available. Prices and details on application.

METERS

2½in. Centre Zero Plain Scale M.C. Galvanometers, 600-0-600 uA, projection mounting, plug-in type. 12/6.

2½in. Round projection mounting M.C. Milliammeter, 0 to 500 mA. 8/6.

2½in. Round Flush M.I. Voltmeter with internal resistance, 0 to 300V A.C. 22/6.

AIRCRAFT AERIAL REELS TYPE RL-42B with 28V Motors.
Price on application.

V.H.F. AIRCRAFT TRANSMITTING AND RECEIVING EQUIPMENT

Crystal Controlled, 115-145 mc/s. Output appr. 4W; total weight appr. 26lb.
4-channel installation TR-1520.
10-channel installation TR-1936.
44-channel installation with automatic tuning.
All A.R.B. released and supplied complete with mounting rack, remote control unit, aerial, plugs and receiver headgear assy with microphone. Particulars on application.

RADIO COMPASS INSTALLATIONS

Complete installations ARN-7 and SCR-269G. Receivers BC-433G and R5/ARN-7; Control Boxes BC-434 and C4/ARN-7; Loops LP-21, Inverters MG-149F and H, Plugs PL-108, PL-112, PL-118 and PL-122, etc.
Prices and details on application.



THOMSON-VARLEY POTENTIAL DIVIDER

Manufactured by H. Tinsley. This is a precision potentiometer having three decades plus divided wire, total resistance 70,000 ohms; resolution 1/100,000 of total resistance. Built-in galvanometer appr. 1 microamp. F.S.D. Accuracy .01%.

PRICE £25

MARCONI F-10C FIELD TRANSMITTING AND RECEIVING EQUIPMENT

Frequency range 2 to 20 mc/s.
Three Crystal Controlled Channels.
The installation consists of: Transmitter, Receiver and accessory box on lightweight frame; Collapsible pedal generator on lightweight frame; Canvas Bag with Aerial Accessories, Telescopic Mast, two 7.5 metre Mast spare parts, accessories, etc.

Full details and prices on application.

2.5 kVA WELDING TRANSFORMERS

for 230 v. mains. Two output sockets 25 amp and 50 amp at 50 v. Output voltage adjustable by means of " off-load " tappings. Permissible momentary overload up to 100%. Waterproof input and output sockets.

PRICE, brand new..... £15 0 0
Carriage £1 10 0

SCANNERS RC-94 for SCR-720 RADAR EQUIPMENT, complete or components.
Prices and details on application.

TELEPHONE SWITCHBOARDS

U.C. 10-line Telephone Switchboards and spares.
American BD-71 and BD-72 6- and 12-line Switchboards and spares.

INSULATION TESTERS

Record " Minor " 500V Insulation Testers, complete with leather case, £10.
Evershed Series I Megger Insulation Testers, 500V 40 megohms, £25.
Evershed Series I Megger Insulation Testers, 1,000V 100 megohms, from £27/10/-.
Evershed Series I Megger Insulation Tester, 1,000V 100 megohms, complete with decade box for resistance measurements, unused, £60.
Evershed Series II 500V Megger Insulation Testers in leather case, £35.
Evershed Series III Megger Insulation Testers (" Wee " Megger), 500V, £12/10/-.
Evershed bridge Meggers, 500V, £45.
Leather Cases for " Wee " Meggers, 15/- each.
All the above are fully guaranteed for six months.

Please write for full details of the above equipment to

Z & I AERO SERVICES LTD.,

14, South Wharf Road, London, W.2

Telephone AMBassador 0151/2

Wireless World Classified Advertisements

Rate 7/- for 8 lines or less and 8/6 for every additional line or part thereof, average lines 6 words. Box Numbers 2 words plus 1/-. (Address replies: Box 0000 c/o "Wireless World" Dorset House, Stamford St., London, S.E.1.) Trade discount details available on application. Press Day March 1958 issue, Thursday, January 30th. No responsibility accepted for errors.

WARNING

Readers are warned that Government surplus components and valves which may be offered for sale through our displayed or classified columns carry no manufacturers' guarantee: Many of these items will have been designed for special purposes making them unsuitable for civilian use, or may have deteriorated as a result of the conditions under which they have been stored. We cannot undertake to deal with any complaints regarding any such items purchased.

NEW RECEIVERS AND AMPLIFIERS

SHIRLEY LABORATORIES, Ltd., 3, Prospect Place, Worthing, Sussex Tel. 30536. THE TWA/1515 stereosonic tape recording and replay amplifier, separate meter monitoring on record and playback on both channels, 13watts O/P, for each channel, 96gns; TWA/15 tape recording and reproducing amplifier, 13watts O/P, for Wearite and Collaro decks, 45gns; TW/PA recording and replay pre-amplifier, 30gns; both with valve voltmeter monitoring; type SB/1-15E high-fidelity amplifier exceptionally wide tone-control system, 40mv sensitivity, 20gns; with two inputs and 3-position gram filter, 22gns; specialized amplifiers for the musical and scientific industries including the Mullard 20watt. [0095

HI-FI at low cost; our AM/FM R/G chassis and feeders are grand performers at highly competitive prices; we particularly emphasize our Model A/F834, and 8 valve 3 waveband 4 watt chassis with gram switching; also Model A/73 AM/FM feeder; trade enquiries invited.—Bayly Bros., 46, Pavilion Drive, Leigh-on-Sea, Essex. [7551

RECEIVERS AND AMPLIFIERS—SURPLUS AND SECONDHAND

HRO Rx's and coils in stock, also AR88, BC348R, CR100, etc.—Requirements please to R. T. & I. Service, 254, Grove Green Rd., London, E.11. Ley. 4986. [0053

EX R.A.F. G.E.C. airfield amplifier equipment incorporating five 175W individual amplifiers with valves, and offered on a fully tested power packs; distribution and test panels; complete with valves, and offered on a fully tested basis; £150 ex-works.—GEORGE COHEN SONS & CO., LTD., Wood Lane, London, W.12. Tel.: Shepherds Bush 2070 and Stanningley, Nr. Leeds. Tel. Pudsey 2241. [7568

TV RECEIVERS—SURPLUS AND SECONDHAND

TV; £5; 6in Premier set in cabinet with magnifier working order, demonstration.—Pri, 0249. [7600

LOUDSPEAKERS—SURPLUS AND SECONDHAND

WHARFEDALE W12/cs sand filled corner panel; £35.—52, Court Lane, Cosham, Portsmouth. [7617

DYNAMOS, MOTORS, ETC.—SURPLUS AND SECONDHAND

1500 cycles alternators 2KVA 80v.—E.W.S. Co., 69, Church Rd., Moseley, Birmingham. [7618

TEST EQUIPMENT—SURPLUS AND SECONDHAND

AMATEUR disposing of test gear, amplifiers, etc., cheap.—Tel. Ley. 1932. [7584

AVO valve characteristic meter Mk. II, recently overhauled by manufacturers; £45 o.n.o.—J. Davy, Ltd., 241, North End Rd., W.14. Ful. 3321. [7570

SIGNAL generators, oscilloscopes, output meters, valve voltmeters, frequency meters, multi-range meters in stock; your enquiries are invited.—Requirements to R. T. & I. Service, 254, Grove Green Rd., London, E.11. Ley. 4986.

NEW COMPONENTS

CRYSTAL microphone inserts (Cosmocord mic 6/4); guaranteed newly made and boxed; 15/6 post free.—Radio-Aids, Ltd., 29, Market St., Watford, Herts. [0170

COMPONENTS—SURPLUS AND SECONDHAND

IN stock.

LARGE quantities of:—
BULGIN resistors and plugs. Ross-Courtney terminals, loudspeaker gauge units. Colvern lead-in tubes, Weymouth coils. Wearite coils and chokes, Morganite resistors, rotary switches, various, tag strips, resistor panels, toggle switches, loudspeakers, valve holders, 6v, 12v and 24v bulbs, etc.
WHOLESALERS' surplus as new at a fraction of new price; complete lists available.
S. J. SURPLUS SUPPLIES, 39a, Sydney St., Brighton, Sussex. [7576

CLEVER STICKS?

no!

clever hands . . .

and clever brains

keep Partridge transformers in the lead. The finest possible materials, constant research and development ensure that, almost inevitably, in any amplifier specification, the words "Partridge Transformer recommended" will appear.

PARTRIDGE



ECONOMICAL DESIGN
MEANS PRICE REDUCTION
OVER TRANSFORMERS WITH
LESS EXACTING SPECIFICATION

P5000 Series
20 WATT MODEL

95/-

- A range of truly "high" fidelity output transformers especially suited to the well-known Osram and Mullard Amplifier designs. The primaries are tapped for ultra-linear connection at 43%, and on certain models at 20% it gives optimum performance at various power levels up to 50 watts for operation with such valves as KT88, KT66, EL34, N.709, EL84, etc.
- The series includes a mains transformer of similar styling with specification to suit the Mullard 5-10 and Osram 912 amplifiers.

Write for full details of these and other specified transformers.

PARTRIDGE
TRANSFORMERS LTD
TOLWORTH SURREY

Phone: ELMbridge 6737/8

COMPONENTS—SURPLUS AND SECONDHAND

RADIO CLEARANCE, Ltd., 27, Tottenham Court Rd., London, W.1. Tel. Museum 9188. ALL items previously advertised still available. [0015

3000 condensers, .25uf 350V, wkg, metalpack, unused, stock; offers.—Tel. Avenue 1634. [7642

SOUTHERN RADIO SUPPLY, Ltd., 11, Little Newport St., London, W.C.2. See our displayed advertisement page 172.

NEW and used radio and television spares and components, low prices; valves from 1/6, all guaranteed; lists 3d.—J. Palmer (W), 32, Neasden Lane, London, N.W.10. [7559

RADIO engineers, dealers, manufacturers; send for our list of brand new clearance lines in radio and television components, etc.—A.W.F., Dept. WW, 10, Sackville St., Bradford, 1. [0131

MAGSLIPS at low prices, fully guaranteed, 3 in Resolver No. 5 (AP 10861), 50v, 50c/s, unused each in tin, 35/-, post 2/1; large stocks of these and other types.—P. B. Crawshay, 94, Pixmore Way, Letchworth, Herts. Tel. 1851. [0087

ILLUSTRATED Catalogue No. 13 containing over 450 items of Government surplus and model radio control equipment, 2/2, refunded on purchase of goods, 2/6 overseas sea mail.—Arthur Sallis Radio Control, Ltd., Department W.W., 93, North Rd., Brighton. [0193

T.V. tubes £1, including carriage!!! This ridiculous price owing to slight screen burns, but giving perfect picture!! Ideal for stand-by or for testing; 14in and 17in rectangular.—Duke & Co., 621-3, Romford Rd., Manor Park, E.12. Tel. Ilf. 6001-3. [7608

NEW GRAMOPHONE AND SOUND EQUIPMENT

DON'T miss the LP tape sale of Sound News.—See under tape recording etc. [0194

GLASGOW.—Recorders bought, sold, exchanged, cameras, etc., exchanged for recorders or vice versa.—Victor Morris, 406, Argyle St., Glasgow, C.2. [0201

CINE-VOX disc recording mechanisms for L.P. or standard operation from 30gns.-56gns.; also complete tape/disc or direct channels from 50gns-112gns.
DEMONSTRATIONS can be arranged in London.—For full details write to K.T.S., Ltd., "Coplow," Park Rd., Braunton, N. Devon. Callers by appointment only. [0210

TAPE Recorders, Ferrograph, 76gns; Reflectograph, £87; Brenell, 48gns; tape decks Wearite, Collaro, Truvox; microphones, Reslo S.T.C., Acos; amplifiers, Leak, 27gns; Quad, £42; hire purchase facilities available; high fidelity tape to disc service.—Lambda Record Co., 4, Kimberley Ave., Liverpool, 23. [6884

ATTENTION! The famous Sonomag "Adatape" pre-amplifier is now fitted to the Collaro Mk. IV tape deck and now incorporates push-pull oscillator, complete with power pack; 58gns. Easy terms and full specification on request.—Sound Tape Vision, the tape recorder and Hi-Fi specialists (Dept. W.W.), 71, Praed St., London, W.2. Pad. 2807. [7555

ALL makes of tape recorders in stock. Ask us about our new high quality, low cost "Addatape," can be connected to amplifier making a real Hi-Fi recorder or plugs into radio; leaflets and prices on request; our terms can't be beaten! Special offer—1,200ft plastic recording tape, only 22/6, plus p. & p. 1/6.—E. C. Kingsley & Co. (F), 132, Tottenham Court Rd., London, W.1. Euston 6500. [7560

TAPE recorders for home and industry; Brenell, 53gns; Ferrograph recorders from 79gns; Leevers-Rich, from £450 according to specification; Standard and L.P. tapes; high quality mics, "Cadenza" Reslo, etc.; speakers, tuners, etc.; take/disk and complete recording service.—"Eroica" Sound Recording Services (1949), 31, Peel St., Eccles, Manchester. Eccles 1624. Director: Thurlow Smith, A.R.M.C.M. [0122

TAPE RECORDING, ETC.

TAPE to disc, Queensway Recording Studios, 125, Queensway, W.2. Bay. 4992. Recorders serviced and for hire. [7421

HAVE your tape recordings transferred to discs; quick service.—Supertone Radio, 29, King St., W.3. Acorn 2594. [0196

RENDEZVOUS RECORDS offer comprehensive 78/LP tape to disc recording facilities. —Leaflet from 19 Blackfriars St., Manchester, 3. [7402

OUR special supply of factory fresh LP tapes has arrived 1,800ft on 7in reels, 34/6; orders in strict rotation; s.a.e.—Sound News, 59, Bryanston St., W.1. [0199

TAPE to disc recording.—L.P. (30 mins.), 27/6; 78s, 15/6, 48-hour service, s.a.e. leaflet.—Marsh, Little Place, Moss Delph Lane, Aughton, Ormskirk, Lancs. Aug. 3102. [7369

USE Britain's oldest full-time tape/disc transfer service for LPs and Mark 78s (still 1952 rates).—Sound News Productions, 59, Bryanston St., London, W.1. Amb. 0091. [0192

SOUTHERN RADIO'S WIRELESS BARGAINS

TRANSMITTER-RECEIVERS. Type 38 Mk. II Walkie Talkie.

● See Special Offer Opposite ●

TRANSRECEIVERS. Type "18" Mark III. Two Units (Receiver and Sender). Six Valves, Microammeter, etc. in Metal Case. Untested, without guarantee but COMPLETE £2/18/6.

ATTACHMENTS for "18" Transreceivers. ALL BRAND NEW. Headphones 15/6; Hand Microphone 12/6; Aerials 5/-; Set of 6 Valves 30/-.

RECEIVERS R.109. S.W. Receiver in Case, eight valves. Speaker and 6-v. vib. Pack. Untested, no guarantee but COMPLETE £2/18/6.

RESISTANCES. 100 Assorted useful values. New wire end 12/6.

CONDENSERS. 100Ad. Mica: Tubular; etc. 15/-.

BOMBSIGHT COMPUTERS. Ex-R.A.F. NEW. Hundreds of Components, Gears, etc. Ideal for Experimenters £3.

LUFBRA HOLE CUTTERS. Adjustable ⅜in. to 3½in. For Metal, Plastic, etc. 7/-.

QUARTZ CRYSTALS. Types F.T.241 and F.T.243. 2-Pin. ½in. Spacing. Frequencies between 5,675 kcs. and 8,650 kcs. (F.T.243). 20Mcs. and 38.8 Mcs. (F.T.241. 54th Harmonic) 4/- each. ALL BRAND NEW. TWELVE ASSORTED CRYSTALS 45/-. Holders for both types 1/- each. Customers ordering 12 crystals can be supplied with lists of Frequencies available for their choice.

MORSE TAPPERS. Standard type 3/6; Extra Heavy on Base 5/6; Midget 2/9.

TRANSPARENT MAP CASES. Plastic 14in. x 10½in. Ideal for Maps, Display, etc. 5/6.

DINGHY AERIALS. Ex-U.S.A. Reflector Type 4/6.

STAR IDENTIFIERS. Type I A-N Covers both Hemispheres 5/6.

CONTACTOR TIME SWITCHES. 2 Impulses per sec. in case 11/6.

Post or carr. extra. Full list Radio, Books, etc., **3d.**

SOUTHERN RADIO SUPPLY LTD
11 LITTLE NEWPORT STREET,
LONDON, W.C.2. GERrard 6653

● **AERIAL EQUIPMENT.** Poles, Masts, Dipples, Yagi, Microwave arrays. Whips, 12in. Whips to 90ft. Masts.

● **CABINETS AND RACKS.** 36in. to 96in. high, standard 19in. wide.

● **CONDENSERS** up to 10,000 mfd. and 50 kV.

● **FUSES.** Cartridge and E.S. ¼ amp. to 600 amps.

● **INSULATORS.** 80 different patterns.

● **LOUDSPEAKERS** 3in. dia. to 50 watt Theatre Systems.

● **METERS.** 2in. to 12in. dia. 120 different types.

● **POWER SUPPLIES.** Generators, Rectifiers, Vibrators, Inverters, Dynamotors from 2 volts 100 amps. to 36,000 v. ½ amp.

● **RECEIVERS.** 80 types available from 15 kc/s. to 600 mc/s. including portable, D.F., Table Rack and Pedestal.

● **TEST GEAR,** American, over 100 different types, Meters, Calibrators, Signal Generators, etc.

● **TELEPHONE AND TELEGRAPH EQUIPMENT.** Single- and multi-channel apparatus, filters, switchboards, power supplies, perforators, printers.

● **TRANSFORMERS** Audio and Power, 200 types from 2 volts to 18,000 volts and up to 15 kVA.

● **TRANSMITTERS,** 60 different types from UF-1 Handie Talkie to G-50, 2,500 watts.

FULL LISTS AVAILABLE

Send your requirements. All packing and shipping facilities.

P. HARRIS,
ORGANFORD, DORSET
Telephone: LYCHETT MINSTER 212

CABINETS

REFLEX cabinets from 2 to 9 cubic ft, free standing or corner type; Gram cabinets, all sizes to suit all pockets; call or send requirements.—T. & F. Hammonds, Cabinet Supplies, 2, Lister St., Nuneaton. Warwickshire. Tel. Nun. 3234. [7626

VALVES WANTED

WE purchase large or small lots of radio valves, must be new in maker's cartons; lowest price to be stated in first letter; immediate cash settlement on completion. WALTONS WIRELESS STORES, 46, 47 and 48, Stafford St., Wolverhampton. [0146

ALL types of valves British or American, transmitting and receiving; keenest cash prices paid. What have you to offer?—Write or call Lowe Bros., 9a, Diana Place, Euston Rd., N.W.1. [6985

WANTED, EXCHANGE, ETC.

AUTOMATIC voltage regulators W.1698, Admiralty pattern required.—Box 3616. [7647

WANTED, four teleprinter five-hole tape readers, type P92951 or P97203, complete with base plate P92949. QUOTE price to Principal, Wolverhampton & Staffordshire College of Technology, Wulfruna St., Wolverhampton. [7579

WANTED, battery portable tape recorder, Boosey & Hawkes reporter, E.M.I. or similar; details, lowest price.—Box 3257. [7574

CONVERT to cash. We buy surplus; new valves, components, meters, etc.—R.H.S., 155, Swan Arcade, Bradford, 1. [0190

EXPERIMENTER urgently requires "Scophony" diffraction light cell.—Griffiths, 354, Ilford Lane, Ilford, Essex. Ilf. 1197. [7592

VALVES (new), tape recorders, test equipment, any quantity.—Stan Willetts, 43, Spon Lane, West Bromwich, Staffs. Tel. Wes. 2392. [7079

WANTED, HRO coils, Rxs., etc., A.R.88s, BS348s, S27s, etc.—Details to R. T. & I. Service, 254, Grove Green Rd., London, E.11. Ley. 4986. [0163

WANTED for cash!—Tape recorders, tape, Hi Fi equipment, etc.; best prices from E. C. Kingsley & Co. (F), 132, Tottenham Court Rd., London, W.1. Euston 6500. [7523

URGENTLY required, scrap platinum wire, contacts, etc.; spot cash for any quantity; £25 per oz troy.—The Scientific Metal Co., 50, Old Brompton Rd., London, S.W.7. Tel. Kni. 2534. [7446

CASH on the spot for second-hand tape recorders, amplifiers and Hi-Fi equipment, top prices paid.—Sound Tape Vision (Dept. W.W.), 71, Praed St., London, W.2. Paddington 2807. [0214

URGENTLY wanted, manuals or instruction books, data, etc., on American or British Army, Navy or Air Force radio and electrical equipment.—Harris, 93, Wardour St., W.1. Gerrard 2504. [7508

WANTED, BC610 Hallicrafters, E.T.4336 transmitters, BC312 receivers, BC221 frequency meters and spare parts for all above; best cash prices.—P.C.A. Radio, Beavor Lane, Hammersmith, W.6. [0079

WANTED, good quality communication RYS tape recorders, test equipment, domestic radios, record players, amplifiers, valves, components, etc., estb. 18 years.—Call, send or 'phone Ger. 4638, Miller's Radio, 38a, Newport Court, Leicester Sq., W.C.2. [7074

REPAIRS AND SERVICE

MAINS transformers rewound, new transformers to any specification. MOTOR rewinds and complete overhauls; first-class workmanship; fully guaranteed. F.M. ELECTRIC Co., Ltd., Potters Bldgs., Warser Gate, Nottingham. Est. 1917. Tel. 54898. [0113

REWINDS, all types of transformers rewound as original or new types supplied to your specification. MANUFACTURERS of the "Meltronic Series" of quality transformers and chokes. MELTON ELECTRONICS, LTD., 42, Towngate St., Poole, Dorset. Tel. Poole 2044-5. [7515

USE Jefco coil winder, cheapest machine on the market.—Details, 170, London Rd., Southend-on-Sea. [0174

MAINS transformers, E.H.T.s, chokes, field coils, etc., promptly and efficiently rewound or manufactured to any specification; 12 months' guarantee. LADBROKE REWIND SERVICE Ltd., 329a, Harrow Rd., London, N.W.10. Tel. Ladbroke 0914. [0222

WE have in stock 1,000s and 1,000s of service sheets for sale or hire; these are the actual ones used by the trade; please send s.a.e. with enquiries.—M. Foy, 6, Wykeback Gardens, Leeds, 9. [1208

D. C. BOULTON for repairs to any loudspeaker: specialists on heavy and P.A. types; cone assemblies, field coils, repair accessories; pressure units, microphones; transformers rewound and to specifications; motor rewinds.—134, Thornton Rd., Bradford, 1. Tel. 22338. [0171

SOUTHERN RADIO'S *SPECIAL OFFER of* TRANSMITTER - RECEIVERS

Type 38 Mk. II (WALKIE TALKIE)

A recent direct Large Purchase of this well-known Tx-R enables us to make this

VERY SPECIAL OFFER

TRANSMITTER-RECEIVER. Type "38" Mk II complete in Metal Carrying Case. 9 x 6¾in. x 4in. Weight 6 lbs. Frequency 7.3 to 9 Mcs. Five valves £1/2/6 post paid.

These Tx-Rs are in NEW CONDITION, but owing to demand they are not tested by us and carry no guarantee, but should prove SERVICEABLE.

ATTACHMENTS for Type "38" Transreceivers. ALL BRAND NEW: Headphones 15/6; Throat Microphones 4/6; Junction Boxes 2/6; Aerials, No. 1 2/6, No. 2, 5/-; Webbing 4/-; Haversacks 5/-; Valves—A.R.P.12 4/6, A.T.P.4, 3/6; Set of FIVE VALVES 19/- the set.

OFFER No. 2:
Transmitter-Receiver "38," as above, complete with set of external attachments, 42/6, post paid.

OFFER No. 3:
Transmitter-Receiver "38" Mk. II. Brand New with complete set of external attachments and complete set of spares including Webbing, Haversacks and Valves, 57/6, post paid.

SOUTHERN RADIO SUPPLY LTD
11 LITTLE NEWPORT STREET
LONDON, W.C.2. GERrard 6653

HANNEY
offers
Components for

OSRAM 912 PLUS AMPLIFIER
OSRAM 912 PASSIVE UNIT
OSRAM 912 PRE-AMPLIFIER
OSRAM F.M. PLUS TUNER
MULLARD "TAPE" AMPLIFIERS
MULLARD 510 AMPLIFIER
MULLARD 510 "A" PRE-AMPLIFIER
MULLARD 510 "B" PRE-AMPLIFIER
MULLARD 3/3 AMPLIFIER
MULLARD F.M. TUNER UNIT
TRANSISTORS AND COMPONENTS
DENCO MAXI-Q F.M. TUNER UNIT

Manuals Available:

912 PLUS AMPLIFIER—4/-; OSRAM F.M. PLUS TUNER—2/6; MULLARD HIGH QUALITY AMPLIFIER MANUAL (contains F.M. details)—3/6; DENCO F.M. TUNER—1/6.

Send 3d. postage, stating lists required. General Components list also available.

L. F. HANNEY
77, Lower Bristol Road
Bath

GILSON

15 and 30W U.L. OUTPUT

TRANSFORMERS

Designed in 1956 these transformers anticipated future trends and we are confident they will meet the requirements of the most discerning amplifier engineer for a long time to come.

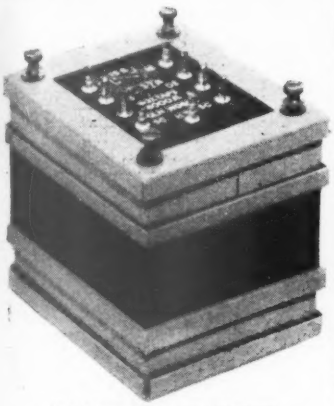

15-WATT TYPE Ref. WO 892

Primary Inductance 290 H. Leakage Inductance P to S 28 mH. Leakage Inductance ½P to ½P 30 mH. Wide frequency range at full power. 3.7, 7 and 15 ohms secondaries. 43% tapped primary.
This transformer is particularly suitable for the Osram 912 and Mullard 510 distributed load amplifiers.

List Price £3.2.6

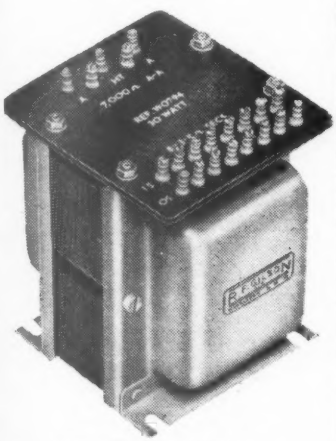

30-WATT TYPE Ref. WO 866

Primary Inductance >250 H. Leakage Inductance <4 m H. Wide Frequency range at full power. H.F. response level to >80K~. 7,000/3.7/15 ohms 43% pri. taps for E.L. 34's, KT66's or 807's.

List Price £5.12.6

Please write for information leaflets on the above.

R. F. GILSON LTD. *Phone: WIM 5695*
11a ST. GEORGE'S RD. WIMBLEDON, S.W.19

Makers of HEAVY DUTY MAINS, NEON and FLUORESCENT LIGHTING TRANSFORMERS

MISCELLANEOUS

VALVE cartons, miniatures 10/6, "GTs" 12/-, "Gs" 14/- per 100, plus 2/- p. & p.; lists free.—R.H.S., 155, Swan Arcade, Bradford. 1. [0915

METALWORK, all types cabinets, chassis racks, etc., to your own specification, capacity available for small milling and capstan work up to 1in bar
PHILPOTT'S METAL WORKS, Ltd., Chapman St., Loughborough. [0208

NOTICES

BRITISH SOUND RECORDING ASSOCIATION. Details of membership, open to the professional sound recording engineer and all others interested in recording high quality reproduction and other branches of audio engineering, together with details of the London lecture programme and the Manchester, Portsmouth and Cardiff Centres, may be obtained from the Hon. Membership Secretary, H. J. Houlgate, A.M.I.E.E., 12, Strongbow Rd., Eltham, S.E.9. [0031

PAINTS, CELLULOSE, ETC.

PANL, recognised for many years as the unique one-coat black crackle finish, brush applied, no baking; available by post in 1/8 pint cans at 3/6 from: G. A. Miller, 255, Nether St., London, N.3. [0260

AGENTS WANTED

AGENTS calling on radio dealers, generous commission to live wires.—A.W.F., 10, Sackville St., Bradford, 1. [0130

MANUFACTURERS of patented, combined indoor television aerial, suitable Bands I and III, would like to contact import agents, with a view to marketing in suitable countries. MARINE AERIALS, Ltd., 17a, Clifton Rise, London, S.E.14. [7590

BUSINESS OPPORTUNITIES

WELL-KNOWN firm of precision engineers and instrument makers (London area) are desirous of entering into a licence agreement or purchasing outright, patents relating to electrical and/or mechanical devices of a precision instrument character, or of a consumer goods nature; adequate capital and production facilities are available to develop, produce and market suitable devices.—Communications should be addressed, in the first instance, to Box 3361. [7589

CAPACITY AVAILABLE

ASSEMBLY, wiring testing available; quotation on sample.—Deane, 200, Railton Rd., S.E.24. [7567

ELECTRONIC instrument manufacturers offer capacity for assembly wiring as well as fabrication of metal cases, chassis and detail parts; S.W. London.—Box 3584. [7639

KAYTRON ELECTRONICS. Capacity available electronic wiring assembly. Top class work. Short or long runs. Collection reasonable distance London.—Dept. E., 223, Brixton Hill, S.W.2. [7607

CHASSIS work, instrument cases, embossed panels, in all usual metals. Special group boards in S.R.P.B., etc. Long or short runs. Precision work at keen prices. Extensive range of stock tools for radio and electronics industry; special tooling at favourable rates.—Metalwork Dept., Unitelex (London), Ltd., Pagnell St., London, S.E.14. Tideway 5842. [0200

WORK WANTED

TRANSDUCTORS, magnetic amplifiers and automatic control equipment manufactured to customer's requirements; let us develop and produce the complete equipment for you; moderate charges, prompt service and delivery. —Able Engineering Co., Ltd., 6, Singer St. Chambers, Singer St., London, E.C.2. Tel. Cle. 3695. [7635

SITUATIONS VACANT

ELECTRONICS Training 1958.

FIVE Year Apprenticeships in the Ministry of Supply.
THE Ministry of Supply is offering five-year apprenticeships in Electronics to boys who were born between 2nd March, 1941, and 1st September, 1942, who wish to become Qualified Electronic technicians.
APPLICANTS should be in possession of, or be studying to obtain, by the end of September, 1958:—
(a) General Certificate of Education with passes at Ordinary Level in English Language, Mathematics and Physics (or other Science subject covering Physics) and one other subject, or
(b) Qualifications giving exemption from S.1 stage of the Ordinary National Certificate and have reached a corresponding standard in English Language.
APPLICATION forms and further particulars may be obtained from the Departmental Training Officer, Ministry of Supply, 66/72, Gower Street, W.C.1. The closing date for receipt of completed application forms is Saturday, 15th March, 1958. [7613

SENIOR Wireless Telegraphy Operator required by
FALKLAND Islands Government for service in South Georgia on contract for one tour of 24/30 months in first instance; fixed salary £780 a year; free board and lodging; free passages; liberal leave on full salary; candidates must be SINGLE and hold 1st class P.M.G. certificate; write to the Crown Agents, 4, Millbank, London, S.W.1; state age, name in block letters, full qualifications and experience and quote M2C/42529/WF. [7588

Armstrong

QUALITY TUNERS



FM 61 VHF TUNER £22.1.0

A sensitive high gain VHF Tuner with completely silent background. It covers the full international Band II (88-108 M/cs) and incorporates switcher AFC, Cathode Follower output, adjustable output matching, and Cathode Ray tuning.



AM 44 AM TUNER £19.17.0

A high grade 4 waveband tuner with Variable Selectivity, Cathode Follower output, adjustable output matching and Tuning indicator.
COVERAGE: 19-50, 51-150, 176-525, 850-2,000 metres.

THE A10 MKII AMPLIFIER

Both these tuners can be used with the Armstrong A10 Amplifier which has adequate power supplies for them. A separate Power Pack (£4 18.0) is however available if required. The front panels of the tuners match that of the A.10

Post this coupon or write for descriptive literature and details of Home Trial facilities and Guarantee to Armstrong Wireless & Television Co., Ltd., Warlters Road, London, N.7. Tel. NORth 3213

BLOCK CAPITALS PLEASE

NAME .....

.....

ADDRESS .....

.....

.....

.....

Demonstrations at our Holloway Showrooms from 9 until 6 weekdays and Saturdays.

BENSON'S BETTER BARGAINS

CERAMICONS:—N750k etc. 1, 1.5, 3.3, 5.6, 8.2, 10, 12, 15, 22, 27, 33, 40, 47, 75, 100, 110, 150, 180, 900, 820, 970, 230 pfs. **6d.** each. Midget mica 500pf. **9d.** **BLOCK CONDENSERS:** 2mfd. 4kVw., **7/6**; 0.1 2kVw., **5/6**; 0.1 2.5kVw., **3/6**; 6mfd 2kVw., **8/6**. **MICA.** 1kVw., 500, 1,000, 2,000, 4,700, 8,200, 0.01, **6d.** each. Block 16mfd. 700vw. Elec., **5/6**. **COMMAND RECEIVERS,** brand new, 6 valves, med. wave (0.52-1.5 mcs.), **97/6**; used **82/6** (post 3/6). Conversion data & circ. for CAR RADIO, **1/6**. **RECEIVERS,** battery, 75-200 metres, 4 valve s/het. 2 volt. New **60/-** (p.p. 3/6). **I.F. STRIP** 373, new, with valves, **42/6**. **RELAYS,** coaxial, "P/G" 12 v., **10/-**; set 3 plugs, **1/6**. **Type 85,** 5 pole c/o heavy-duty; 6/12 v., **7/6** (p.p. 2/6). **RX78,** 2.4/13 mc/s. with 5 valves. 100kc/s. Xtal. Good cond., **35/-** (p.p. 3/6). **TEST SETS: 74A** with 10 valves, VCR 139a and faulty power pack, fair condition **40/-** (carr. 8/6). **BC1066** VHF Receiver, valves 2/957. 1/1D8GT, new **15/-** (p. 3/6). **VIBRAPACKS,** 6v. D.C. to 250v. 80 mA., smoothed, cased, **22/6** (post 3/6). **RESPONSER ZC3931,** 160/190 mc/s. New, with valves, **15/-** (carr. 7/6). **VIBRATORS,** Mallory G629C 12 v. 4 pin. **7/6**. **BRAND NEW R.F.26, 25/-** (post 2/-); **RF26,** 27, good cond., **20/-**. **DYNAMOTORS** (post 3/6); 12 v. to 250 v. 65 mA. and 6.3 v. 2.5 A., **11/6**; 6 v. to 250 v. 80 mA., **12/6**. **METAL RECTIFIERS:** 240 v. 100 mA., **4/-**; 240 v. 30 mA., **3/6**; 1,000 v. 30 mA., **7/6**. **R1155 B.M.T** using **DRIVE "N"** type, brand new, **10/6**. **CHOKES,** L.F., 10H, 120 mA., Screened **7/6**; 5H. 200 mA., **4/6**. **SWITCHES,** wafer, 1p 6w 5b, **2/6**; 1p 11w 3b, 6p 2w 4b **3/6**. Stud type, Muirhead 1p 24w 2b, **7/6**. **VHF AMPLIFIER,** valves 2/CV66, 1/VR136, with 50 c. power unit, **40/-** (p.p. 3/6). **TEST METERS.** New, 4 x 4 x 2½in. Read 1.5 and 3 v., 40 mA. and 5k Ω **12/6**. **TS347** contains 10 mA. 3½in. meter, res. etc. **8/6**. **TS350** with 1 mA. 3½in. meter, valve TP25, etc., **30/-**. **METERS,** contain 2 separate micro-amp movements and 2 neons, new **7/6**. **PERISCOPES** (Mirrors) 3½ x 1¼in.; univ. joint for rod fitting, **1/-** pair. **MOTORS** enclosed, 6½ x 3½in. dia., D.S. ¼in. spindle, 200/230 v. (AC/DC) intermittent, **12/6** (post 3/-). **FORMERS** 1in. dia. Twin dust cores, can 2x1in. dia., 9d. **TS1270** (U.S.A.). New, boxed and loose; enquiries invited. **POWER UNIT 301.** Input 200/250 v. Outputs: 250 v. 75 mA. & 2½ v. 1a D.C. and 6.3 v.; 2.5 a. A.C., new, cased, with plugs, **45/-** (p.p. 3/6). **CR100.** New, replacement power transformer, **30/-**. **KIT** of spares, including 15 valves, **23**. Heater trans. 6.3 v. C.T. 3 a. in metal box, with 4 fuses and 2 DPST switches, **12/6** (p.p. 3/-). **LIST AND ENQUIRIES:** S.A.E. please! Terms, C.W.O. Postage extra. Immediate despatch.

Callers: **W. A. BENSON (W/W)**
136 Rathbone Road, Liverpool 15. *SEF* 6853.
Callers & post: **SUPERADIO (Wireless) LTD.**
116 Whitechapel, Liverpool, 1. *ROY* 1130.

PRECISION SHEET METALWORK

We specialise in manufacturing of Chassis in all metals, large or small quantities to your own specifications

V. W. BEAMISH

Shardeloes Garage, Shardeloes Rd., New Cross, London, S.E.14.
Telephone: TIDeway 4786

build your own
TAPE RECORDER
with the
'ASPDEN'
tape deck kits

Two models, 5in. or 7in. spools, two speed, twin track, ferroxcube heads, finest motor, and complete assembly instructions.
Compact model 582 kit..... £9 5 0
Standard model 782 kit..... £9 5 0
Assembled and tested 30/- extra.

And the
RECORD/REPLAY AMPLIFIER KIT, 2½ watt, neon indicator, without valves, £5/18/-.

POWER PACK KIT for above, less valve, £2/18/6.
Carr. extra.

Mr. A. C. K., of Co. Durham, writes:—
"Many people who have heard it have been staggered that such quality can be obtained for such a low price."

This deck and amplifier is being used in the Antarctic by an expedition member.

Send stamp for full particulars to:—
W. S. ASPDEN
Stanley Works, back Clevedon Road, Blackpool, Lancs.

SITUATIONS VACANT

KENT EDUCATION COMMITTEE.

NORTH-WEST KENT COLLEGE OF TECHNOLOGY.

ELECTRICAL Engineering Department. Lecturer in Light Current Electrical Engineering required to teach H.N.C. and Radio and Television Servicing subjects. The person appointed will be responsible for a well equipped Radio and Measurements Laboratory and the equipment of a new laboratory for Radio and Television Servicing. Salary will be in accordance with the Burnham Technical Report 1956, on the £1,200-£1,350 scale.

FORMS of application, together with further particulars, may be obtained from the Principal at the College, Miskin Road, Dartford, Kent. [7616

SENIOR PLANNING ENGINEER.

A VACANCY exists for a senior planning engineer to provide the technical liaison between programme planning and engineering facilities; applicants must have had considerable experience in all branches of television production engineering, and be able to give rapid and accurate answers to senior programme executives on production requirements.—Applications should be sent in by 1st March, 1958, and should be sent to A.G.M. (Staff), Associated-Rediffusion, Television House, Kingsway, London, W.C.2. [7631

TELECOMMUNICATIONS Engineer.

REQUIRED by British Company in Bangkok, a qualified engineer, age indication 25-30 years, preferably single, with at least five years' experience in the sales, installation and maintenance of telephone, radio and telegraph communications and knowledge of electrical equipment up to 3.3kv; applicants should have had experience with a manufacturer of one of the required fields and preferably have served with an operating company or the signalling branch of H.M. Forces; must be prepared to travel extensively.—Write, with full particulars, to Box DE/102, c/o 95, Bishopsgate, London, E.C.2. [7624

JUNIOR Wireless Telegraphy Operator required by FALKLAND ISLANDS GOVERNMENT for service in South Georgia for one tour of 24/30 months in the first instance. Salary according to age and experience in scale £420 rising to £520 a year. Free board and lodging. Free passages. Liberal leave on full salary. Candidates must be SINGLE and able to transmit and receive Morse at 25 w.p.m. The should be familiar with HF and MF transmitters. P.M.G. Cert. and ability to read reports in International Meteorological Code an advantage. —Write to the Crown Agents, 4, Millbank, London, S.W.1. State age, name in block letters, full qualifications and experience and quote M2C/41977/WF. [7615

CITY OF BIRMINGHAM EDUCATION COMMITTEE.

GARRETTS Green Technical College, Garretts Green Lane, Birmingham, 33.

PRINCIPAL: B. C. Whitehouse, B.Sc., A.R.I.C.

APPLICATIONS are invited for the following full-time teaching post:—

ASSISTANT, Grade B, to teach subjects of the C. & G. Telecommunications Engineering and Radio Servicing Courses. H.N.C. or equivalent qualification required.

SALARY scale: Assistant, Grade B: £650×£25—£1,025.

IN all cases when assessing the initial salary, increments may be allowed for appropriate experience in industry or commerce, in addition to increments for training and degree or degree equivalent.

APPLICATION forms and further particulars available from the Principal (foolscap s.a.e.), to whom completed forms should be returned as soon as possible

E. L. RUSSELL,
CHIEF Education Officer. [7581

UNIVERSITY OF LONDON, Post-graduate Medical School

ASSISTANT required in the Biophysics Laboratories for development of instruments for medical research; field covered includes Electrocardiography, electrical and optical methods of following blood conditions strain gauge methods of pressure recording and other applications of electro-mechano transducers and recording devices for use on the human subject; the candidate should have had good basic training in the design and use of electronic circuits; the selected candidate will be a member of a small group in well-equipped laboratories with good workshop facilities, and must be capable of independent work under limited supervision and guidance; the age of the candidate should be between 22 and 30; the salary will start at £525-£710 depending on age and qualifications, and will rise to £800; facilities are given for further study; superannuation.—Application forms from the Dean, P.G.M.S., Ducane Road, W.12. [7601

RELAYS. Engineer, fully experienced, required to supervise and open department in relay production.—Write full particulars of age, experience and salary required Box 3441. [7604

URGENTLY required, qualified radio and television engineer; good working conditions in expanding service department; top salary for efficiency. Box 3021W. [7545

RADIO Engineer with A.R.M.E. A licence.—Apply Chief Radio Engineer, Dam-Air Engineering, Lasham Airfield, nr. Alton, Hampshire. [7591

WHAT MATTER WHETHER THE DYKES FILL—IF YOU CAN FILL YOUR EARS and SOUL WITH THE CONTENTMENT GIVEN BY DUODE NATURAL SOUND

"However much and often I listen to my Duode, I never fail to get some new joy—that is, when I hear another familiar sound come out just like it is in real life. I suppose I shall in time lose the thrill and settle down to contentment, but maybe even then the spark will come out now and then to remind me how good it all is."

Need we add another word? **Duode Natural Sound** is worth quite a bit of effort to hear, and if there is no good dealer near, then our home test plan will bring a **Duode** to visit you at home.

Write for details to:

DUODE LTD.
c/o The Gramophone
11 Greek Street, London, W.1

FM and HI-FI COMPONENTS
in stock for the
WIRELESS WORLD FM TUNER UNIT

DENCO FM TUNER	circuits	1s. 6d.
RADIO CONSTRUCTOR FM	"	2s. 0d.
MULLARD AMPLIFIERS	"	3s. 6d.
G.E.C. 912 PLUS AMPLIFIERS	"	4s. 0d.
G.E.C. FM PLUS TUNER	"	2s. 6d.

Separate price lists on request to

J. T. FILMER 83, DARTFORD ROAD, DARTFORD, KENT.
Tel.: Dartford 4057

"DIPLOMA" HEADPHONES



Lightweight High Resistance (4,000 ohms). Complete with cord
17/6

Ideal for CRYSTAL SETS
The 'TYANA' Standard Soldering Iron

- Adjustable Bit
- Weight approx. 4 oz.
- Heating time 3 min.
- 40 Watt economy Consumption.
- Standard Voltage Ranges

16/9

Replacement Elements and Bits always available

KENROY LIMITED
152/297 UPPER ST., ISLINGTON, LONDON, N.1
Telephone: CANonbury 4905-4663

MASSCORE
SAVAGE

TRANSFORMERS AND CHOKES for the New 400 watt AUDIO AMPLIFIER

G. R. Woodville — Wireless World — November 1957.

Output transformer type 4T35 as used by the author
1,000Ω anode to anode tapped at 40%
Four secondaries each 25v. total 400 watts.

High Tension Transformer type 5A9-1
Primary 10-0-200-220-240v. 50~
Secondary 700v. 1.2A rectified D.C.

Auxiliary Transformer type 5A9-2
Primary 10-0-200-220-240v. 50~
Secondaries 150-0-150v. 20m/A D.C.
6.3v. 20A
2.5v. 10A
2.5v. 5A
2.5v. 5A

Choke type 5A9-3
2 hys. when carrying 1.2A D.C. and 200v R.M.S. 100~ D.C. resistance 20Ω.

SAVAGE
TRANSFORMERS
LIMITED
DEVIZES, WILTSHIRE
Tel: Devizes 932

SITUATIONS VACANT

THE MANCHESTER COLLEGE OF SCIENCE AND TECHNOLOGY, (FACULTY of Technology in the University of Manchester.)
LECTURER in Electrical Engineering.
THE Governing Body invites applications from graduates in Electrical Engineering or Physics for a Lectureship in Electrical Engineering in the College of Science and Technology, with the title and status of Lecturer in the University of Manchester.
CANDIDATES with special interests in high frequency techniques or in servomechanisms would be preferred, but applications will be welcomed from candidates with other interests. The Department covers a very wide range of aspects of electrical enginering, and all members of staff are expected to undertake, assist in, or supervise research.
SALARY: On the lecturer scale with a maximum of £1,650, together with a family allowance of £50 per child and F.S.S.U. benefits. Starting salary according to qualifications and experience.
CONDITIONS of appointment and form of application may be obtained from the Registrar, The Manchester College of Science and Technology, Manchester, 1. The last day for the receipt of application is January 31st, 1958.
B. V. BOWDEN,
PRINCIPAL of the College [7609

BRITISH TELECOMMUNICATIONS RESEARCH, Ltd., have vacancies for:—
(a) An ENGINEER to develop and design small transformers and inductors for use in communications systems. Previous experience in this field is desirable and preference will be given to a candidate with experience of Ferrite application
(b) An ENGINEER to develop an interesting project with world-wide application and involving the use of transistors and printed-circuit techniques in miniature R.F. equipment. Candidates should preferably be graduates or equivalent and have some experience in this field.
BOTH positions offer stimulating opportunities for new development work with attractive salaries and first-rate social amenities. The positions are permanent, include participation in the Company's Superannuation Scheme, and assistance with housing can be arranged. The Laboratories are situated in ideal surroundings adjoining some of the finest reaches of the Thames, and yet within an hour of London. Saturday morning interviews can be arranged. —Applications should be addressed to The General Manager, British Telecommunications Research Ltd., Taplow Court, Taplow, Nr. Maidenhead, Berks. [7633

RECORDING engineer with tape/disc experience wanted.—Full detail. to Box 3591. [0231

PHYSICISTS and Electronic Engineers: Applications are invited for the following interesting and progressive posts:—
(a) SERVO Engineer—to work on the analysis and synthesis of servos connected with a missile guided system; experience in servo-theory is essential.
(b) SYSTEMS Engineer—for the design and development of missile guidance systems.
(c) ELECTRONIC Engineer for design and development work on missile fire control systems; an interest in pulse circuitry and transistor techniques is desirable.
FOR the above posts a degree, or equivalent, is required, with a minimum of two years' experience in industry; applicants should be capable of taking some technical responsibility, and controlling the activities of one or two assistants.
STARTING salary would depend upon qualifications and experience; further progress in salary and status would be determined by ability to take responsibility.
APPLICANTS should write to The Personnel Manager (Ref. 149A), de Havilland Propellers, Ltd., Hatfield, Herts. [7637

THE GENERAL ELECTRIC Co., Ltd., Radio and Television Works, Spon St., Coventry—Requires Senior and Junior Electronic Development Engineers.
APPLICANTS for these posts should have experience of Military Electronic Equipment and preference will be given to those with qualifications in Electrical Engineering.
THOSE interested in these posts are invited to write in confidence to the Personnel Manager. [7614

SENIOR Electronics Engineers with experience and technical ability.—Apply the Research & Development Organisation of A.G.I., Ltd., 105, Lansdowne Rd., Croydon. [7634

TELEPHONE Mechanic Engineer, first class, required large firm engineers. 12 months' services overseas; excellent opportunity; write age, experience.—Box 3585. [7638

REQUIRED, Engineer with tube reclaiming experience to organise and run tube reclaiming department.—Apply W. T. Baker, Market St., Bridgend, Glam. [7641

T/V engineers required; must drive; excellent prospects for right men; salary from £750 p.a.—App'y E. Coyne, Ltd., 120/122, Ladbroke Grove, W.10. Tel Bay 1947 [7424

TELEVISION engineer required by leading old-established dealer with high reputation to maintain, holding all main agencies; good prospects for an experienced engineer with top salary and accommodation if required.—Write giving full details A. E. Hughes & Sons, 28, Clarence Place, Newport, Mon [7629

Smith's of EDGWARE ROAD

ELECTRONIC COMPONENTS DISTRIBUTORS FOR OVER 25 YEARS

Some popular lines:

FOUR-SIDED BLANK CHASSIS
Made in our own works from commercial quality half-hard aluminium of 16 s.w.g. thickness these chassis will carry components of considerable weight and normally require no corner strengthening.
We are now able to supply same day any size of chassis in ½in. steps up to 18in. Depths ½", 1", 1", 1½", 1¾", 1¾", 2", 2½", 2¾", 2¾", 3", at the following rates:—

48 sq. in.*	4/-	176 sq. in.	8/-	304 sq. in.	12/-
80 sq. in.	5/-	208 sq. in.	9/-	336 sq. in.	13/-
112 sq. in.	6/-	240 sq. in.	10/-	368 sq. in.	14/-
144 sq. in.	7/-	272 sq. in.	11/-	and pro rata.	
Post 1/3		Post 1/6		Post 1/9	

(*Length plus twice depth × width plus twice depth.)
½in. flanges on two sides (inside or outside) 1/6 extra.
Soldered corners (new process) 2/- extra.
Panels, any size up to 3ft. at 4/6 sq. ft. (sq. in. × ¼ d.).
Full particulars on request.

Close Tolerance Wax-protected Silver Mica CAPACITORS
Values stock (pF):—

5	22	47	75	130	180	270	370	515	635	815	3000
10	25	50	80	135	200	280	386	533	670	820	3300
11	27	56	82	140	220	300	400	540	680	1000	3500
13	28	60	100	145	225	316	410	556	703	1500	4000
15	30	65	110	150	230	330	450	560	710	2000	4700
18	33	68	120	160	245	340	470	600	750	2200	5000
20	40	70	125	175	250	356	500	603	800	2500	

Tol.: up to 33pF 1pF, over 33pF, 1 per cent.
PRICES: 5-300 pF 9d.; 316-820pF 10d.: 1,000-2,500 pF 1/3; 3,000-5,000pF 1/6.
Special (limited number only), 0.1 mfd. 1%, 12/-.
*Surplus stocks of mica, paper and ceramic capacitors from 6d. each.
*DALY guaranteed ELECTROLYTICS
Full range from 1/6 ea.
*HIGH STABILITY RESISTORS. "T.S.L." ½-watt 10% tol., 5-year guarantee. Full "preferred value" range, 12Ω to 10MΩ, 6d. each, 1% tol., 2/6d. each.
*SURPLUS STOCKS various makes:—

	5%	2%	1%
½ watt	7½d.	10d.	1/3
1 watt	9d.	1/-	1/6
1 watt	10½d.	1/3	1/9

"ELECTROVOICE" guaranteed TRANSFORMERS AND CHOKES. Individually tested. Fully shrouded. Used by leading laboratories. 66 types in stock.
WAFER SWITCHES made to order. Quotations on request.

The COOPER-SMITH HIGH FIDELITY AMPLIFIER
Model BP1 Main Amplifier, £14 17 -. Build-it-yourself, £12/12/-. Mk. II Pre-amp. and Control Unit, £11/3/-. Build-it-yourself £8/3/-.
DIRECT FROM MAKER TO USER
A better 10 watt amplifier at lower cost. Send for illustrated details of this remarkable outfit or hear it in our demonstration room.
Other Hi-Fi equipment includes Acoustical, Leak, Rogers, Lowther, Goodmans, Wharfedale, Lorenz, Philips, Connoisseur, Collaro, Garrard, Goldring.

RELAYS 600 type 3/6 each
2-make, 3000Ω coil.
1-make, 1 c/o, 150Ω coil
1-break, 1 c/o, 1 200 (M before B 150Ω coil).
VISUAL INDICATORS, type 3 (10Q/4) containing two micro-amp movements Brand new, 6/6 each With neon lamps (two) 9/6.
MANSBRIDGE CAPACITORS. 200 V. D.C. wkg. Suitable for crossover units, etc. .5 mF., 4d. each; 1 mF., 6d. each; 2mF., 6d. each; 4 mF., 9d. each.
*Over 60 other types from 6d.
LIGHTWEIGHT HEADPHONES: 2,000Ω 12/6 pr. 4,000Ω 17/6 pr.
POWERFUL 24 V., D.C. MOTORS. 2in. square, 4 mm. spindle. Will work on A.C. 6/6.
AMERICAN 21-way PLUGS AND SOCKETS with cover, 7/6 pr. AMPHENOL, 4-pin, one hole fixing (13/16in.), retaining screw, chromium plated, 5/-.

High-Grade Meters
By LEADING MANUFACTURER
Flush mounting, 3⅛in. dia. (less flange). 3in scale.
DC MOVING COIL
100 microamps FSD, resistance 750Ω Calibrations —0-20 mA. 0-3kV. 0-3kV. 0-2 mA/0-250 V. 5-0-5/0-10. 0.5mA./0-1kV., 85/-.
0-100 milliamps res. 0.75Ω, 50/-.
0-500 volts, res. 500kΩ (1k. PV), 65/-.
0-1,000 volts, res. 20mΩ (20k. PV) 95/-.
AC MOVING IRON
0-300 volts, with external res., 50/-.
5 amps. FSD, scale 0-30, 50/-.
All the above are brand new and tested.

Please add approx. cost of postage.
*Lists available.

H. L. SMITH & CO. LTD
287/289 EDGWARE ROAD, LONDON, W.2
Telephone Paddington 5891

LONDON CENTRAL RADIO STORES

CANADIAN 88 MARK I 5-VALVE SUPERHET RECEIVER. Frequency coverage 6 Mc/s to 9 Mc/s (50-33.3 metres), operates from battery or vibrator. Range up to five miles with telescopic antenna or greater with higher antenna. Sender master oscillator and power amplifier. Sensitivity 1 milliwatt output with input of 3 microvolts. **10** ens.
HIGH-SPEED ELECTRO-MAGNETIC COUNTERS. Ex-Govt., 0-9,999, 25/50 V. D.C. Size 4 × 1 × 1in. Single coil. 2,300Ω. **18/6.** Twin coil. 1,000 and 1,000Ω. **23/6.**
MILLIAMMETERS. 2in. dial. Reading 30-0-30, flush mounting. Ex-Govt. Not checked for accuracy **7/6.**
METAL RECTIFIERS. Ex-Govt., made by S.T.C., 250 v. 60 mA, size 5/8in. × 1in. dia. Unused. **7/6.**
WIREWOUND RESISTANCES. 160Ω 1 A. Overall size 10 × 1in. dia. Unused. **5/6.**
ELECTRO MAGNETIC COUNTERS. Ex-G.P.O., every one perfect, 400 and 500 ohm coil, counting to 9,999, operated from 25 v.-50 v. D.C., 4¼in. long × 1¼ × 1in., many industrial and domestic applications. **5/6.**
0-1 MOVING COIL MILLIAMMETER. Overall dia. 3¼in., dial 2½in., flush panel mounting. **25/-.**
DECIBEL METER. Moving coil, reading −30 to zero (0db = .775 v. (R.M.S.)), overall dia. 4¼in., dial 3in. **24/10/-.**
MOVING COIL HAND MIKE. Type No. 7. **8/6.**
VIBRATORS. Synchronous 6 v. 7-pin and 2 v. 7-pin. **7/6** each.
AVO UNIVERSAL TEST METERS. Reconditioned, as new. In perfect working order. Model Z, **£10/10/-.**
VENNER 8-DAY CLOCKWORK TIME SWITCHES. 230 volt, 1 amp., 3¼ × 2¼ × 2¼in., **25/-.**
UNISELECTOR SWITCHES. Have many applications including automatic tuning, circuit selection, etc. Operation on 24-50 v. Full wipe 4-bank, double coils. **32/6.** Half wipe 6-bank **12/6.**
VOLUME CONTROLS, with switch 10K, 2 pole 1in. spindle. **3/6.**
VOLTAGE DROPPING RESISTANCE. 60 watts A.C./D.C. 5 valves, 13 volts .03 amps, tapped at 100-110 volts. 200-210 volts. 220-230 volts. 240-250 volts. Size 4in. high × 1in. diameter, **7/6.**
5in. **ALDIS LAMP REFLECTORS.** Glass parabolic, **6/-.**

All prices include carriage.

23 LISLE ST. (GER. 2969) LONDON, W.C.2

Closed Thursday 1 p.m. Open all day Saturday

COVENTRY RADIO

COMPONENT SPECIALISTS SINCE 1925

We have now trebled the size of our premises in order to supply a larger range of Components, Amplifiers and HI-FI Equipment.

Send your enquiries to:

189-191, DUNSTABLE ROAD, LUTON, BEDS.

New Telephone No. :—LUTON 7388-9

SHERWOOD INSTRUMENTS LIMITED

FOR GUARANTEED WORKMANSHIP WITH PERSONAL SERVICE

- CAPSTAN WORK 10BA TO 1¾in.
- SHEETMETAL FABRICATIONS
- ELECTRONIC METALWORK
- PRESSWORK — ASSEMBLIES
- PRODUCTION MACHINING
- DRILLING — TAPPING — MILLING
- WELDING — SILVER SOLDERING

A.I.D. APPROVED

ROSEMONT ROAD, LONDON N.W.3 HAMPSTEAD 6655.

SITUATIONS VACANT

FOREMAN required, fully conversant with all types of transformer manufacture for the radio and electrical industry.—Apply to Haddon Transformers, Ltd., Masons Ave., Wealdstone, Middlesex. [7537

SUPERVISOR required by leading manufacturer of high quality loudspeakers and microphones; experience in this field and ability to control female staff essential; full particulars and wages required.—Box 3575. [7630

TELEVISION bench and field engineers required at all times for vacancies in most parts of the British Isles; permanent positions with highest salaries, plus bonus for suitable applicants; 5½-day week.—Box 2781. [0251

RELAY company in beautiful part of South Devon require television engineer; duties, maintenance and managerial.—Applicants should apply in writing, stating practical experience, qualifications and salary required, to Box 3265. [7577A

EXPANDING Electronics Laboratory seeks development engineers with wide experience of audio amplifiers, H.N.C. or equivalent, pleasant working conditions.—Pamphonic Reproducers, Ltd., Dalston Gdns., Stanmore, Middx. Wor. 4014. [7549

HOUSE available for fully experienced TV service engineer—Stoke-on-Trent for supervisory and administrative duties in new well-equipped workshop, excellent working conditions and top rate pay for suitable applicant.—Box 3552. [7627

COMPANY with world-wide interests requires an engineer to test and inspect television distribution systems throughout England and Wales; a salary of up to £1,000 p.a. and all expenses while travelling will be paid.—Reply in confidence to Box 3400. [7598

COILWINDING company employing some 50/60 workpeople and specialising in small audio and mains transformers requires development engineer to eventually take charge of design and test; the situation offers considerable scope for a progressive and ambitious engineer.—Usual details to Box 3197. [7573

ENGINEER with some five years practical experience of radio frequency design work required for interesting new project in laboratory situated in South West outskirts of London; pension scheme. Write giving full particulars of experience and salary required to Box No. 3321. [7586

ENGINEER to undertake design and test of high grade sound and data recording equipment. Salary £1,000-£1,400. Excellent prospects with expanding concern.—Write stating age, qualifications and experience to Leevers-Rich Equipment, Ltd., 76b, Hampstead Rd., London, N.W.1. [7606

CRAFTSMAN required for radio and television duties; must be experienced in the repair and maintenance of all types of radio and television receivers; present rate of pay 4/7½ per hour; N.J.I.C. conditions.—Apply, by letter, to District Manager, Midlands Electricity Board, 27, The Bull Ring, Ludlow. [7577

DEVELOPMENT ENGINEER required for design of interesting new electro mechanical equipment; must have had at least ten years design experience; the work will be ten miles South West of London and there is a pension scheme; write giving details of experience and salary required to Box No. 3320. [7585

TELEVISION Development Engineers.—Two senior engineers are required for the development laboratory of an important company in a West London district. Applicants should hold good academic qualifications and have several years' experience in the development of black and white receivers and some knowledge of colour television.
THE positions are permanent and pensionable and offer scope for advancement.
ALL applications will be treated in strict confidence and should give full details of experience, qualifications, age and salary desired to Box 2574. [7476

E. K. COLE, Ltd., Malmesbury, require at once Production Testers for testing Radio, Radar and Nucleonic equipments. Ex-service Radio and Radar Fitters suitable. Possibility of housing accommodation; full canteen and welfare facilities, transport from outlying areas.—Applications should be made to Personnel Manager. [7554

ELECTRONIC engineer required to design and maintain electronic plant in an electrical instrument laboratory; the position requires first-class experience and practice in electronic engineering; the company has a modern contributory pension scheme; five-day week; canteen facilities.—Please send full details of age, experience and salary desired to Box 3516. [7623

TV Service engineers—well paid permanent positions with the largest countrywide servicing organisation to fill vacancies due to reorganization and expansion; workshop vacancies Stoke-on-Trent, Leicester, Derby, Lincoln, York, Southampton; field service vacancies to cover Preston, Wellington/Oswestry / Shrewsbury / Whitchurch, Harrogate / Ripon, Stratford-on-Avon/Redditch, Cheltenham/Gloucester, Leighton Buzzard/Aylesbury, Andover/Salisbury, and I. O. Wight areas.—Belcher (Radio Services), Ltd., 59, Windsor Rd., Slough. [7628

ANNOUNCING THE FIRST

ELECTRONIC ENGINEER'S REFERENCE BOOK

Editor **L. E. C. HUGHES**
A.C.G.I., D.I.C., B.Sc.(Eng.), Ph.D., M.I.E.E.

Over 1200 Pages
Over 800 Illustrations.
383 Sub-sections.

Never before has the knowledge of so many eminent men in this field been available in one master volume.

£4/4/- Post Free.

Cash Refunded If Returned Within 14 Days.

TRANSISTOR A.F. AMPLIFIERS by D. D. Jones & R. A. Hilbourne. **21s.** Postage 9d

INDUSTRIAL TELEVISION by H. A. McGhee **15s.** Postage 8d.

TRANSISTOR CIRCUITS by R. P. Turner **22s.** Postage 9d.

RADIO DESIGNER'S HANDBOOK by F. Langford-Smith. **42s.** Postage 1/6.

Complete catalogue 6d.

THE MODERN BOOK CO.

19-23 PRAED STREET LONDON, W.2

Phone: PADdington 4185

Open 6 days 9-6 p.m.

PORTABLE TEST PANEL



for workshop or students' use

Two separate moving coil meters for voltage, current and resistance measurement. In wood-en case with metal front and test prods.

Ranges (AC & DC)
0-30mA
0-10v, 0-25v
0-500v
0-10,000 ohms
Size 8½" × 5½" × 2½" light and portable.

Cash £6 (inc. post/pkg.) **or 30/- down and 5 monthly payments of £1 (Total Price £6.10.0.)**

Order now from:—
E.M.I. INSTITUTES, Dept. T.P.127, London, W.4

IC.87

PROVED

The finest method for cleaning records

Already over 200,000 enthusiastic users

THE "Dust Bug"
AUTOMATIC GRAMOPHONE RECORD CLEANER
PATENT APPLIED FOR

Price reduced to 17/3 (plus 7/- purchase tax)
from your local dealer or
CECIL E. WATTS
Consultant and Engineer (Sound Recording and Reproduction)
Darby House, SUNBURY-on-THAMES, MIDDX

CABINETS & EQUIPMENT by STAMFORD

GP35/A. 3ft. wide, Motor Board, size 17in. x 14in. (or 35½in. x 14in., as shown in GP36/B). Price **£16/10/9** or 47/- Deposit and 9 Monthly Payments of **33/10.**

GP36/B. 3ft. wide, Motor Board, size 35½in. x 14in. (or 17in. x 14in. and control panel as shown in GP35/A). Continental styling but inset lines omitted from doors. Price **£18/18/-** or 54/- Deposit and 9 Monthly Payments of **38/7.**



GP38. 3ft. wide Motor Board, size 35½in. x 14½in. (or 16in. x 14½in. and control panel, as shown in GP35/A). Price **£19/7/6** or **56/-** Deposit and 9 Payments of **40/8** monthly.

These cabinets are supplied in Oak, Walnut and Mahogany veneers, to shade required. Delivery 12/6 in England and Wales.
Write for Catalogue of Equipment and cabinets for EQUIPMENT, RECORDS, SPEAKERS, and PYE BLACK BOX. Satisfaction guaranteed or money refunded.

Demonstrations of:
LOUDSPEAKERS: The Goodmans Range, Wharfedale, G.E.C., Duode, Lorenz.
GRAMOPHONE UNITS: Garrard 301, Connoisseur, Lenco.
AMPLIFIERS & CONTROL UNITS: Acoustical, Quad II, Leak, Rogers and Armstrong.
TAPE: Sonomag, Adaptatape.
F.M. TUNERS: Leak, Rogers, Armstrong.



Demonstrated at our New Showroom:
98 WEYMOUTH TERRACE,
(Off Hackney Road) LONDON, E.2.
Telephone SHO 5003
Hours: 9.30 a.m. to 5.30 p.m. Mon., Tues., Fri., Sat.
Wednesday: 9.30 a.m. to 7 p.m.
Thursday: 9.30 a.m. to 1 p.m.
No. 6 Bus from LIVERPOOL STREET. Book to the Odeon, Hackney Road, and walk back two turnings.

Correspondence to:
A. L. STAMFORD (Dept. U4)
20 College Parade, Salusbury Road, London, N.W.6.

SITUATIONS VACANT

OVERSEAS.—Oil exploration company with world wide seismic parties offers permanent career to electronic technicians; maintaining and operating field equipment; men prepared to accept responsibility and to live in camp conditions; academic qualifications to H.N.C. or equivalent or genuine practical experience to this standard; liberal home leave.—Box 1608. [0188

TRANSISTOR Engineer; a vacancy exists for an Electronic Engineer at new Research Laboratories in connection with the design and development of novel transistor computing circuits; qualifications required are a degree, H.N.C. or equivalent and some experience of transistor circuit design.—Apply A. V. Roe & Co., Ltd., Hanworth Lane, Chertsey, Surrey. [7599

SKYWAYS, Ltd., require experienced radio mechanics at Stansted Airport for employment in workshops and on maintenance of engines in aircraft; applicants must be fully experienced, particularly in workshop practice; good rates of pay and conditions of service.—Apply with full details to Personnel Manager, Skyways, Ltd., Stansted Airport, Essex. [7596

CLARENDON LABORATORY, University of Oxford, requires an experimental assistant for work in connection with the electron synchrotron; H.N.C. or equivalent and considerable experience in electronics essential; salary according to experience but on the scale £500×£25 to £750 p.a.; good holidays, pension scheme, etc.—Write, giving full particulars, to the Administrator. [7619

DESIGN engineer required for original development and design work on power magnetic/amplifiers and transformers, H.N.C. or equivalent coupled with design experience in this field; factory situate in Crawley New Town, Sussex; housing accommodation is available and there is a pension scheme if desired. —Apply in writing to: Hirst Electronic, Ltd., Gatwick Rd., Crawley, Sussex. [7646

CAMERA Control Operator. Applicants are invited for the post of Television Camera Control Operator (higher grade). Prime considerations will be given to those applicants with qualifications in electrical engineering, and preferably having five years' Television Broadcast experience. Salary £1,400 per annum.—Applications should be addressed to the Assistant General Manager (Staff), Associated-Rediffusion Ltd., Kingsway, London, W.C.2. [7605

RADIO technicians of all grades are invited to apply for interesting and varied positions in car radio servicing installation and development. Vacancies occur from time to time for our dealers at all parts of the country; a high standard of practical and theoretical knowledge of radio technology is required.—Apply in the first instance to: Personnel Officer, S. Smith & Sons (Radiomobile), Ltd., North Circular Rd., London, N.W.2. [0270

ERIE RESISTOR, Ltd., invite applications for the post of correspondence clerk in their main sales office in London; essential qualifications are ability to handle voluminous and varied correspondence, practical technical knowledge, and similar recent experience; knowledge of export procedure an advantage. Written applications only, stating age, experience and salary required, to Sales Manager, Carlisle Rd., The Hyde, London, N.W.9. [7595

RADIO technicians required by international Aeradio, Ltd., for overseas service; permanent pensionable positions; inclusive salary from £845 per annum to £1,616 per annum, tax free, according to marital status; child allowances; free accommodation; free insurance; kit allowance; free air passages; generous U.K. leave.—Qualified candidates, to to whom replies only will be sent, please write, quoting R.T., to Personnel Officer, 40, Park St., W.1. [0262

INSTRUMENTATION ENGINEER with electronic background is required for a technical Sales Office; ability to deal at all levels with complex technical enquiries and contracts; the Company is dealing with pressure, weighing and computing systems; car owning engineers aged between 25 and 30 invited to apply, salary will depend on qualifications and experience.—Apply Transducer Division, J. Langham Thompson Ltd., 88, High Road, Bushey Heath, Herts. Ref. ABC/Sales. [7583

ELECTRONIC engineer required for small research department of geophysical consulting concern; work, of varied and interesting nature, includes low-frequency amplifier design, magnetic recording, transistor circuitry, vibration detection and display, and servo devices; complete familiarity with two or more of these subjects is a better recommendation than paper qualifications, though HNC or better, specialised in electronics with a background of physics, would be an advantage.—Apply Box 3286. [7562

MEDICAL Research Council—junior development engineer required, a sound knowledge of electronics is essential and some experience of prototype work desirable, the salary will commence in the range £535-£715 depending upon qualifications and experience, rising by annual increments up to a possible maximum on the scale of £870.—Write, stating age and full details of education and experience, to Personnel Officer, National Institute for Medical Research, The Ridgeway, Mill Hill, N.W.7. [7620

LYONS RADIO LTD.

POWER UNITS TYPE 285. Input 230v. 50 cps. A.C. mains. **Output: E.H.T.** 2,000 v. D.C. at 5 mA. **H.T.** 350 v. D.C. (double section choke and condenser filter to give exceptionally good smoothing) at 150 mA. Size of components suggest this could be increased to at least 200 mA. **L.T.** 6.3 v. A.C. at 5 A. and 6.3 v. A.C. at 10 A. Fitted with valves 5U4, VU120 and VR91. Housed in metal cases 18 × 12 × 9in. Supplied with circuit diagram and in good working order. PRICE ONLY **59/6,** carriage 8/6.

ROTARY CONVERTERS. P.U. 195. Input: 24 v. D.C. **Output:** 230 v. A.C. 50 cps. 100 watts. Housed in metal cases 11¼ × 10¾ × 7¾in. fitted with standard 3 pin 5 A. socket. In good condition and working order. PRICE **84/-,** carriage 6/-.

APN. 1. UNITS. Radio altimeters which in effect are transmitter/receivers with an A.F. amplifier section. The three basic sections are assembled on separate sub-chassis which make them easy to dismantle and use separately. Operational frequency is 67.42 cm. (445 Mc/s). Can be converted for use in the 70 cm. band or for model control. The A.F. amplifier as a mike pre-amp. or intercom. etc.



Fitted with 14 valves (4-12SH7, 3-12SJ7, 2-12H6, 2-9004, 2-955, 1-VR150/30), relays, transducer and stacks of other useful components. Also a **Dynamotor** 24/27 v. D.C. input and 285 v. at 75 mA. D.C. output. In very good condition. These units offer plenty of scope for interesting experiment, or just as a source of useful parts, represent tip top value at the BARGAIN PRICE only **29/6,** or less Dynamotor **25/-,** carriage 7/-.

TEST SET TYPE 48. Comprises an R.F. oscillator having a frequency of 360 Mc/s. employing valve type RL18 with a switched 750 cps. modulation, valve type VR118 being employed in this circuit. The radiator is a ¼-wave vertical rod aerial. Operates from 6v. D.C. and 120v. H.T. Housed in teak instrument cases with space for batteries. Overall size 15 × 10 × 8¼in. In good condition. PRICE **30/-,** carriage 4/6.

RECEPTION SETS R.109. Ex Army 8 valve superhet receivers employing 5-ARP12 and 3-AR8 valves. Fitted with miniature loudspeaker and vibrator type power pack for operation from 6 volt car or motor cycle battery. Frequency range 1.8 to 8.5 Mc/s. (35 to 167 metres). Front panel is fitted with all controls including RT/CW switch and 2 jacks for alternative headphone listening. Size 13 × 12 × 11in. Supplied with circuit diagram input plug and aerial tested before despatch PRICE ONLY **85/-,** or less valves **45/-,** carriage 8/6. Low impedance headphones to suit with headband and cord terminating with a jack plug to fit. PRICE **6/9.** Supplied separately please add 1/6 postage.

BATTERY CHARGER COMPONENTS. Rectifier full wave bridge selenium type for charging up to 12 volts at 4 amps. PRICE **17/6,** post 1/6. **Transformer.** Pri. 200/250 v. 50 cps. A.C. mains. Sec. tapped 3.5, 9 and 17 v. for use with above rect. for providing an output of 2, 6 or 12 v. at 4 A. PRICE **17/6,** post 1/6. SPECIAL PRICE both items together **32/6,** post 2/-.

POWER UNITS TYPE 234. Input: 200/250 v. 50 cps. A.C. mains. **Output:** approx. 250 v. smoothed D.C. at the very conservative rating of 100 mA. and 6.3 v. A.C. at 5 A. Two choke and condenser filter gives exceptionally good smoothing. For bench or rack mtg. Size 19 × 10 × 6½in. Voltmeter fitted to front panel indicates input or output voltage. In good condition and working order. PRICE ONLY **57/6,** carriage 8/6.

3, Goldhawk Rd, Shepherd's Bush (Dept. M.W.), London W.12
Telephone: SHEpherd's Bush 1729

OPPORTUNITIES IN RADIO

Get this FREE Book!

'ENGINEERING OPPORTUNITIES' reveals how you can become technically qualified at home for a highly paid key-appointment in the vast Radio and Television Industry. In 148 pages of intensely interesting matter, it includes full details of our up-to-the-minute home study course in all branches of **TELEVISION and RADIO, A.M. Brit. I. R. E., City & Guilds, Special Television, Servicing, Sound Film Projection, Short Wave, High Frequency and General Wireless Courses.**

We definitely Guarantee

"NO PASS—NO FEE"

If you're earning less than £18 a week this enlightening book is for you. Write for your copy today. It will be sent **FREE** and without obligation.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY

388b COLLEGE HOUSE,
29-31 WRIGHT'S LANE,
LONDON, W.8

BIET

BRASS, COPPER, DURAL, ALUMINIUM, BRONZE

ROD, BAR, SHEET, TUBE, STRIP, WIRE

3,000 STANDARD STOCK SIZES

No Quantity too Small. List on Application.

H. ROLLET & Co. Ltd.

6 Chesham Place, S.W.1. *SLOane* **3463**

ALSO AT LIVERPOOL, BIRMINGHAM, MANCHESTER, LEEDS

QUARTZ CRYSTAL UNITS

Q.C.C.

Please note change of address :

The QUARTZ CRYSTAL Co. Ltd.

Q.C.C. WORKS,
WELLINGTON CRESCENT,
NEW MALDEN, SURREY.

Telephones: Malden 0334 & 2988.

Grams., Cables: QUARTZCO, NEW MALDEN

SITUATIONS VACANT

SENIOR sales representative required in the Ludlow district; applicants must have wide practical experience in first-class theoretical knowledge of radio and television receivers and should be competent to advise consumers on matters concerning supply, tariffs, apparatus sales, wiring and installation thereof; salary £615/£675 per annum (N.J.C. Grade 2); superannuable.—Apply by letter, within 14 days, stating age, qualifications, experience and present salary, to District Manager, Midlands Electricity Board, Bull Ring, Ludlow. [7578

MAKERS of T.C.C. condensers, N. Acton, London, invite applications for the positions of technical sales representatives; the situations offer good prospects and are pensionable; applications, containing details as to age, qualifications, experience and salary required, will be considered in strict confidence; only first-class men are being entertained, preferably those with experience in the radio and electrical industries.—Reply to Sales Director, The Telegraph Condenser Co., Ltd., North Acton, London, W.3. [7597

ERIE RESISTOR, Ltd., invite applications for the post of technical sales representative for London and the South; applicants should preferably have had recent similar experience, and must be the holder of the Higher National Certificate on Electrical Engineering, or of some similar qualification, and, above all, must be fully conversant with modern radio and television technology from the manufacturing angle; applicants must also own a reasonably modern car.—Written applications only, stating age, experience and salary required, to Sales Manager, Carlisle Rd., The Hyde, London, N.W.9. [7593

HOME OFFICE.—Wireless technician. The Civil Service Commissioners invite applications from men for about 50 permanent posts in Pinner, Middx. and at Regional Wireless Depots in various parts of England and Wales. Duties include installation and maintenance of radio equipment used by police and fire services. Age at least 22 on 1st December, 1957. Candidates must have sound theoretical and practical knowledge of wireless engineering and communications equipment, including V.H.F. apparatus. Possession of C. & G. Certificates, or comparable qualifications, an advantage. Ability to drive a car desirable.
STARTING pay at Pinner £540 at age 24 (£30 less for each year under 24) up to £630 at age 28. Scale maximum £685. Slightly less at Regional Depots. Promotion prospects. Five-day week.
FURTHER particulars and application form from Secretary, Civil Service Commission, Trinidad House, Old Burlington St., London, W.1, quoting No. S4792/58. Completed application forms to be returned by 6th February, 1958. [7580

BRITISH OVERSEAS AIRWAYS CORPORATION have vacancies for simulator engineers at London Airport for the design/development and maintenance of analogue computors and electronic aids to training, qualifications to H.N.C. (electrics) or City & Guilds Final (telecommunications) level; candidates less qualified may be considered; some specialised training will be provided; attractive pay and allowances, pension, insurance and leave schemes; sports and social club.—Write giving full details of experience, to Assistant Staff Manager (Appointments), London Airport, Hounslow, Middx. [7566

BELLING & LEE, Ltd., wish to appoint : assistant technical sales representatives age 28/33, to call on manufacturers; research laboratories in areas comprising Scotland N. Ireland and N.E. England, and England south of the Thames; they should preferably have a degree or technical equivalent, be based in these areas and own a car; remuneration will be by salary and commission and reasonable expenses will be paid.—Applications stating age, qualifications, experience and giving some indication of remuneration expected to the Secretary, Great Cambridge Rd., Enfield Middlesex. [7571

SENIOR Technician or Technician required in the Physics Department for electronics work in connection with a 30 meV synchrotron and other projects. Candidates should preferably possess Higher National Certificate or equivalent qualification. Salary according to qualifications and experience—Senior Technician £620×20—£660×25—£760 plus London Weighting; Technician £515×20—£555×25—£630 plus London Weighting.—Applications, giving names and addresses of three referees should be sent as soon as possible to the Secretary, Institute of Cancer Research, Royal Cancer Hospital, Fulham Road, S.W.3. [7612

ELECTRONICS Technical Assistant required in inter-departmental workshop of Royal Free Hospital School of Medicine, 8, Hunter St., London, W.C.1. Applicants should be capable of maintaining and servicing existing equipment and assisting with the design and production of new electronic apparatus such as biological amplifiers, pulse generators, oscilloscopes, etc., to be used for research work in the various departments of the medical school. The appointment offers scope to a person who has sufficient enthusiasm and ability to seek work of a non-routine nature. The minimum salary will be £760 p.a. depending upon the theoretical qualifications and practical experience of the applicant.—Apply to Secretary at above address, with names of two referees. [7610

LINE AND RADIO COMMUNICATIONS

TELEPHONE CARRIER EQUIPMENT: Carrier Terminals, Repeaters, associated Filter Units and spares for Systems 1+1 and 1+4—Carrier Link S.E.—Apparatus Selective Carrier 28-Channel and 12-Channel Terminal Units.

TELEPHONE SWITCHBOARDS AND FIELD SETS: Switchboards F & F 20-Line and 40-Line—Switchboards U.C. 10-Line—Field Sets Types D, F, H and L.

TELEPRINTER SYSTEMS: Teleprinters tape and page Keyboard Perforators, Transmitter Heads, Reperforators and Printers tape and Page Carrier Equipment Speech+simplex, Speech+Duplex, 3-Channel Duplex and Apparatus 2/4 Tone No. 5, Carrier and Ringing Repeaters.

LINE TEST EQUIPMENT: Test Sets EE65—Networks Balancing and Testing—Recording Bridges—Diversity Combining Units—Testers TMS No. 1.

TRANSMITTERS: H.F. Communications, Hand or High-Speed Keying, Crystal or M.O control, Temperature compensated M.O. Circuit. Frequency range 1.5 to 20 mc/s. C.W., M.C.W., and R/T 100% Modulation. 300 Watt Carrier output all systems.

AN/GRC SERIES: Communications stations with all operating equipment and spares SCR-508, SCR-509, SCR-610.

LOW POWER TRANSMITTER/RECEIVERS: Aircraft V.H.F. Equipment AN/ARC-1 50-Channel. Stations and Sub-Assembly Units TR 1520, 1934, 1935 and 1936 10-Channel V.H.F. Equipment.

RADIO COMPASSES: SCR-269G with all operating equipment.

WIRELESS SET 19: Stations with all operating equipment and R.F. Amplifier for boosting output.

WIRELESS SET 62: Lightweight Communications Sets with ancillary equipment.

T.C.S. SERIES: Equipment with all ancillaries and Power Supply Units for 12v. D.C., 24v. D.C., 115v. A.C. and 230v. A.C. supply.

WIRELESS SET 88: Walkie-Talkie Sets 4-Channel.

R. GILFILLAN & CO. LTD.

7, High Street, WORTHING, Sussex.

Tel.: Worthing 8719 and 30181.

Cables: "GILL WORTHING" Codes: "BENTLEY'S 2nd"

RADIO & TELEVISION COMPONENTS

We operate a prompt and efficient MAIL ORDER service.

3d. stamp (only) for catalogue.

James H. Martin & Co. Finsthwaite, Newby-Bridge, Ulverston, Lancashire.

A SPENCER-WEST BAND III CONVERTOR

FOR **£6 . 5 . 0**



The Type 80 with printed circuits, panel controls for Band switch and fine tuning and a performance which ensures enthusiastic satisfaction. Handsomely designed and finished to stand on your receiver with its self-contained power supply it just plugs straight it.

Full descriptive leaflet on request. Available from all good dealers or post free direct from the manufacturers if any difficulty.

SPENCER-WEST LTD.

QUAY WORKS, GREAT YARMOUTH NORFOLK

'Phones: Works 4794; Sales 3009
'Grams: Spencer-West, Gt. Yarmouth

BAKERS 'Selhurst' RADIO

The Full-Range ULTRA TWELVE
Cone resonance 20 c/s.
20-25,000 c/s
£17 . 10 . 0

The
BRADFORD PERFECT BAFFLE
(Patent Pending)

A COMPACT enclosure ensuring realism and clarity of reproduction with NO BOOM.

A comprehensive range for single- and multi-speaker systems is available.

From £8/15/0 for 17in. x 17in. x 12½in.

We are demonstrating the GOODSELL "Golden Range," the ORTOFON Pick-Ups and the WOOLLETT Transcription Gramophone Turntable.

Daily : 9 a.m. to 6 p.m.
Saturdays : 9 a.m. to Noon.

Lilt LIMITED
17 Charing Cross Road
London, W.C.2
Tel.: TRAfalgar 5575
(opp. Garrick Theatre)

Trade and Export enquiries to :—
JOHN LIONNET & COMPANY
(at above address)

SITUATIONS VACANT

BELLING & LEE, Ltd., wish to appoint an experienced technical sales representative, age 30-35, to call on the wholesale and retail trade in Scotland; applicants must be Scottish by birth, and preferably resident there, and should have H.N.C. or City & Guilds in electrical engineering with radio and telecommunications, or similar qualifications; must own car for which allowance will be made; remuneration will be by salary and commission and reasonable expenses will be paid.—Applications stating age, qualifications, experience and giving some indication of remuneration expected, to the Secretary, Great Cambridge Rd., Enfield, Middlesex. [7632

ERIE RESISTOR, Ltd., have a vacancy for a general factotum in their distributor sales department in London, duties will embrace all aspects of the handling of orders from the wholesale trade, namely, negotiation of order, indenting of stocks, control of stores, packaging, despatch, and all correspondence relating thereto; must have had previous experience in the wholesale trade, or in dealing with the wholesale trade, preferably on the components side, must have practical technical knowledge, and, preferably, some experience of display.—Written applications only, stating age, experience and salary required, to Sales Manager, Carlisle Rd., The Hyde, London, N.W.9. [7594

BROADCASTING and Radio Technicians required by Government of Cyprus for appointment on contract for two years. Salary scale (including Overseas Allowance and present temporary allowance of 21½% of salary) £1,273 rising to £1,494 a year. Gratuity at rate of £80/£100 a year; Outfit Allowance £30; free passages; liberal leave on full salary; housing provided at low rental; candidates must be able to take charge of 20 K.W. broadcasting transmitters; ex-army Foremen of Signals and comparable ex-R.N. and R.A.F. personnel may apply; write to the Crown Agents, 4, Millbank, London, S.W.1, State age, name in block letters, full qualifications and experience and quote M2C/42540/WF. [7587

SENIOR mechanical design draughtsmen are required by the design department of Murphy Radio, Ltd., to work on radio and television. Experience of similar work is essential and preference will be given to applicants between the ages of 25 and 35. This affords an opportunity to join a successful expanding design team providing excellent scope to men of initiative and originality. Welwyn Garden City is most pleasantly situated within easy reach of London, and applicants from the London area would be eligible for housing after a period.—Apply by letter initially, giving details of age, experience and qualifications, to Personnel Department (R.12), Murphy Radio, Ltd., Welwyn Garden City, Herts. [7611

CHIEF Telecommunication Engineer required by Iraqi Ports Administration, Basrah, on contract for one year in first instance; total emoluments, including salary, allowances and Provident Fund contributions equivalent to £1,940 a year for single man and up to £1,988 a year for family man; free passages; liberal leave on full salary; candidates should possess A.M.Brit.I.R.E. and 1st class P.M.G. Cert., or C. & G. Final Cert. in Radio Communications and 1st class P.M.G. Cert., or A.M.I.E.E. with specialist knowledge of telecommunication work. They should also have a working knowledge of I.C.A.O. Operational (Aviation Wireless) requirements.—Write to the Crown Agents, 4, Millbank, London, S.W.1. State age, name in block letters, full qualifications and experience and quote M2C. 42590/WF. [7640

TECHNICAL sales/service managers required for British West African branches of large British company distributing radio receivers, telecommunication equipment, telephones, domestic and commercial refrigerators, air conditioners and office equipment, etc.; good technical background in radio essential, some commercial experience desirable; familiarization courses arranged with U.K. manufacturers prior to departure for Africa; first-class passage air/sea, free furnished quarters, full pay on leave after approximately 18 months' tour, pension scheme; apply, in own hand writing, stating age (preferably between 21 and 28), whether married or single, full details education, qualifications, National Service and business experience; original references should not be sent.—Apply, quoting TSSM, to Box 3499. [7621

SENIOR Sales Engineer required by a company situated in the N.W. Kent area, this is a new appointment which offers the prospects of promotion to deputy sales manager to a man who is suitably qualified and possesses drive and initiative. This appointment has become necessary to keep pace with the Company's expanding activities in the field of capacitors. It is essential that applicants should have a sound technical background in the power, radio or telecommunication field with preferably some experience in the sale of a wide variety of capacitors. A four-figure salary, graded in accordance with experience, will be paid to the selected applicant with whom satisfactory arrangements will be made in connection with travelling and expenses.—Replies, which will be treated as confidential, giving full details of age, education, qualifications, positions held and the relevant salaries, should be sent to Box 3 R K 4110, A.K. Advg., 212a, Shaftesbury Ave., London, W.C.2. [7625

TELEPHONE SETS
IN ATTRACTIVE BAKELITE CASE
BRAND NEW EX-GOVT. "F" TYPE

Ideal between 2 or more positions up to five miles. STORE FACTORY AND OFFICE; FARM BUILDINGS; GARDEN SHED and HOUSE. 2 sets in individual carrying cases, complete with **long life batteries, bells, ringer and 100ft. telephone cable.**

£7.10.0 per pair Carr. (G.B.) 9/6

D3 STRANDED TELEPHONE CABLE, NEW, 1 mile drum, 85/-, carr. 17/6

AERIAL MASTS
R.A.F. TYPE 50
36ft. HIGH

Kits comprise—9 2in. dia. Tubular Steel (Copper Plated) Sections of 4ft. length, top-section and base, Pickets, Guys and Fittings.

YOU can purchase this normally expensive MAST for a fraction of its cost, i.e.,

£8 . 10 . 0 ONLY (Carr. 15/6)

Please add £1 for (returnable) wooden carrying case.

The MAST is particularly suitable to take aerials for Tx., Rx., F.M. and T.V. (especially COMMERCIAL), and has many other uses. Extra 4ft. sections can be supplied at 11/6 per section.

U.S.A. 45ft. AERIAL MAST (10 sections 4ft. 6in. x 4in., guys etc.). This entirely new and complete set in canvas carrying bag **£15/10/-** each, carr. 17/6 or 2 sets with additional low and high frequency antenna £30 pair. Carr. extra.

ARMY TYPE 32FT. MASTS similar to above but 10 in. screw-sections, suitable for permanent lightweight installation. Kit in canvas bag, £5/10/-, carriage 12/6.

(M.O.S. Release)
SPECIAL OFFER OF
DYNAMO EXPLODER Mk II



For detonating explosive charges. A must for mining, demolition, road building and construction operations. May also be adapted as photo-flash generator. Operated by hand generator giving 1,800 volts d.c. across o/p. terminals.

In hide 'eather case (Usual price 17 gns.) Our Price **£3.19.6 each.**
P. & P. 5/-.



TRUVOX and TANNOY LOUD HAILERS EX-GOVT.
Impedance 7½ Ω
Handling cap. 8 watts
price 25/-, post 3/6.
45/- pair carr. paid.

TELEPRINTER EQUIPMENT-Brand New
Creed Automatic Transmitter No. 6S4/N. Rect. Units 26B. I-P 110/230 v. O-P 80+80 v
Telegraph Relays 299 AN.
Creed Keyboard 7M. 3 Bank 5 Unit with answer-back unit.
7B Carriage Unit, stand friction feed 51813.
Also comprehensive range of spares.

Quantity and Export enquiries are invited for all above items, also other Electronic Component parts.

HATTER & DAVIS (RELAYS) LTD.
126, KENSAL ROAD, LONDON, W.10 LADbroke 0666

SITUATIONS VACANT

ROYAL MILITARY COLLEGE OF SCIENCE, Shrivenham, Berkshire, requires male Senior Lecturers or Lecturers in Mathematics, Chemistry, Civil or Mechanical Engineering, Electrical Engineering, Radar and Telecommunications and Engineering Physics for teaching at University level; good facilities for research; quals., appropriate 1st or 2nd class honours degree; teaching experience an advantage and knowledge of application of subject to Service matters useful; age, minimum for Senior Lecturer (normally) 26, for Lecturer, 21; salary, Senior Lecturers £1,130 to £1,330; Lecturer, £595 to £1,050; starting salary allows credit for approved post-graduate experience and National Service; superannuable under F.S.S.U. with good prospects of permanency; quarters in residential officers' mess for single men; possibility of houses at economic rent for married men after waiting period.—Particulars and forms from M.L.N.S., Technical and Scientific Register (K), 26, King St., London, S.W.1, quoting A364/7A. [7602

APPLICATIONS are invited by the Commonwealth Relations Office for an appointment under the Technical Co-operation Scheme of the Colombo Plan, as Professor of Communications Engineering at the Indian Institute of Technology, Kharagpur, India; will be required to organise courses in Communications Engineering and to train the Institute's teachers and research workers in developing the laboratories and the general activities of the Department; must be an engineer or scientist with special theoretical ability and should have made a contribution towards the development and application of communications engineering; should have specialised in Communications Theory, Feedback Theory and Servo Control and/or Microwave Engineering; duration, three years; contract with the U.K. Government; salary, £2,000 p.a. (subject to U.K. income tax) plus tax-free overseas allowance of £1,330 p.a. (married) or £750 p.a. (single) plus other allowances; free furnished family accommodation provided.—For further information and application forms write Ministry of Labour and National Service (E.9), 26-28, King St., London, S.W., quoting A.12/IND/244/TCS. [7636

SITUATIONS WANTED

EXPERIENCED technical representative seeks senior appointment with electronic component manufacturer.—Box 3183. [7572

TRANSFORMER designer, expd. most types, seeks responsible post, E. Midlands/E. Anglia area; own car; willing to travel.—Box 3259. [7575

TECHNICAL Sales Representative, radio/TV; licensed amateur, keen, energetic with proved sales record and administration, seeks change to a position of sales manager or assistant; would consider any remunerative proposition where responsibility, drive and security are offered; all correspondence to be treated with the strictest confidence.—Box 3588. [7643

TECHNICAL TRAINING

LEARN it as you do it—we provide practical equipment combined with instruction in radio, television, electricity, mechanics, chemistry, photography, etc.—Write for full details to E.M.I. Institutes, Dept. WW47, London, W.4. [0006

CITY and Guilds (Electrical, etc.) on "No Pass—No Fee" terms; over 95% successes; for full details of modern courses in all branches of electrical technology send for our 144-page handbook, free and post free.—B.I.E.T. (Dept. 388A), 29, Wright's Lane, London, W.8. [0117

TUITION

NOTHING succeeds like success! What we have done a thousand times we can do again for you—see the B.N.R.S. advt. page 138. [0172

WIRELESS operating; attendance and postal courses.—Stamp for reply to Manager, The Wireless School, Manor Gdns., London, N.7. [0104

FULL-TIME courses for P.M.G. Certs., C.G.L.I. Telecommunications, Radar Maintenance Cert. and B.Sc.(Eng.); prospectus free.—Technical College, Hull. [0111

WIRELESS.—See the world as a radio officer in the Merchant Navy: short training period; low fees, scholarships, etc., available; boarding and day students; stamp for prospectus.—Wireless College, Colwyn Bay. [0018

T/V and Radio.—A.M.Brit.I.R.E., City and Guilds, R.T.E.B. Cert., etc., on "No Pass—No Fee" terms; over 95% successes; details of exams. and home training courses in all branches of radio and T/V; write for 144-page handbook—free.—B.I.E.T. (Dept. 397A), 29, Wright's Lane, London, W.8. [0116

ALL EXAMINATIONS easier to pass by I.C.S. A home study methods. A.M.Brit.I.R.E., C. & G. Telecoms, P.M.G. Cert. in Wireless Telegraphy, radio and TV servicing, etc.—Write for free prospectus: International Correspondence Schools, Dept. CL.42A, Kingsway, London, W.C.2. [0033

A.M.I.Mech.E., A.M.Brit.I.R.E., City and Guilds, etc., on "No Pass—No Fee" terms, over 95% successes—or details of Exams and courses in all branches of Engineering, Building, etc., write for 144-page Handbook—Free: B.I.E.T. (Dept. 387B), 29, Wright's Lane, London, W.8. [0118

A WALKIE-TALKIE SET

No. 38, Mk. II.



RIGHT IN PRICE AND SIZE—9 × 6 × 3¼in.

Ideal for search parties, fire brigades, civil defence, building contractors, etc. Range approximately 5 miles, 7.4-9 mc/s. Brand new condition. Complete with 5 valves, headphones, throat mic, junction box, aerials, harness signal satchel, and instruction card with illustrations. Operated from dry batteries, H.T. 120/150 v., and L.T. 3 v. (not supplied). In brand new condition, our price **£2/17/6** each, p.p. 7/6d.

EX G.P.O. ELECTRO MAGNETIC COUNTERS, 5 × 1½ × 1½ in. 4 figures, various voltages D.C. 3/6 v. 18/24 v. 100/110 v. 200/230 v. D.C. 5/- each. 12 v. 7/6 each, p. & p. 1/6.

INTERCOMMUNICATION HAND SETS, self-energised similar to G.P.O. type, no electricity or batteries required, connect with 2-way bell wire, clear range of several hundred yards. Brand new **32/6** per pair, p. & p. 2/-.

HIGH SPEED RELAY, 2 bobbins 1,000 ohms each, **5/6**, p. & p. 1/-.

U.S. HIGH SPEED RELAY, 300 ohms coil 2.05 v adjustable contacts, 5/-, p. & p. 1/3.

HEADPHONES M/C, complete, **9/6** per set, p. & p. 1/6.

HEADPHONES CLR, complete, 7/- per set, p. & p. 1/6.

HEADPHONES BAL. ARMATURE 9/- per set, p. & p. 1/6.

RECEIVER-TRANSMITTER No. 18 Mk III. 6-9 Mc/s, Rec. can be detached from Trans. Unit, built-in micro-amp meter, complete with headphone and mic., aerial, etc. In excellent condition. Less batteries. Our price **£3/0/0.** P. & P. 7/6.

EX U.S. AERIAL, 9ft. spring loaded and fully collapsible complete with cords and guys, ideal as aerial or fishing rod, brand new, **10/6**, p. & p. 2/-.

AERIALS, 3 four foot "F" rods, bottom, centre & top (tapering) push-in-type sections. **10/6** per set, p. & p. 2/3. Matching aerial base **3/6**, p. & p. 1/6.

BROADCASTER

for talking, singing or announcing over your own radio, simply connect to your Radio pick-up . . . 2 Broadcasters will make a 2 station intercom house phone. No electricity or battery required, just connect with 2-way wire. **12/6** ea. p. & p. 2/-.

M/C METER. 0-15 and 0-600 v. D.C. 2in. flush mounting ex. equipment, **8/6**, p. & p. 1/3

METER. 2½in., 0-1 amp., projecting type thermo-couple, new and boxed, **6/6**, p. & p. 1/3.

U.S. MIDGET MOTORS. 2×1¼in. Will operate from 6 v. to 24 v. D.C., **12/6** each, p. & p. 1/6.

DITTO. Will operate from 9 v. to 28 v. D.C., **12/6** each, p. & p. 1/6.

(Also reversible types as above, **13/6** each, plus p. & p. 1/6.)

VIBRATORS. 12 v. 4-pin Mallory type 5/-, p. & p. 9d.

U.S. REFLECTOR AERIAL. Omnidirectional antenna, umbrella type. Ideal for transmitting and receiving. Meas., when opened, approx., 4ft. × 3½ft., **4/6** each, p. & p. 1/6.

ACCUMULATOR CUT-OUT. 12 or 24 v. 60 a., ex-R.A.F., **10/6** each, p. & p. 1/6.

ACCUMULATOR CUT-OUT. 27 v. Max. discharge 7 amp., **7/6**, p. & p. 1/6.

Special prices for bulk quantities.

Stockists of W/S No. 19 and spares.

TERMS C.W.O.

We specialise in Telephone and Z.A. Equipment and spares as used by Govt. Depts. and the Services. Trade and manufacturers enquiries invited.

FINSBURY TRADING CO.

12 STOKE NEWINGTON HIGH ST., LONDON, N.16

Tel.: CLissold 7342

TUITION

LEARN-AS-YOU-BUILD course in basic radio, electronic and electrical theory with practical training, building a 4-valve receiver and superhet signal generator and multitester; write for free book.—International Correspondence Schools, Dept. CL.42, Kingsway, London, W.C.2. [0350

TRAIN at home for a better position or a new hobby.—We offer comprehensive modern home tuition courses covering over 100 careers and hobbies; practical equipment supplied with many courses.—Write for free brochure, stating subject of interest, to E.M.I. Institutes, Dept. WW39, London, W.4. (Associated with H.M.V.) [0180

A.M.I.P.R.E.—for details of suitable study courses (only a limited number of students accepted), send for free syllabus of instructional text; I.P.R.E., conditions of membership booklet 1/-; "The Practical Radio Engineer" journal, sample copy 2/3; 6,000 alignment peaks for superhets, 6/-.—All post free from Secretary, I.P.R.E., 20, Fairfield Rd., London, N.8. [0088

FREE!—Brochure giving details of home study training in radio, television and all branches of electronics; courses for the hobby enthusiast, or for those aiming at the A.M.Brit.I.R.E., City and Guilds, R.T.E.B., and other professional examinations; train with the college operated by Britain's largest electronics organisation; moderate fees.—Write to E.M.I. Institutes, Dept. WW28, London, W.4. [0179

PERSONAL

MALE Nurse would give services whole/part-time in return for sound theoretical/practical and tuition, radio, television engineering.—Box 3596 [7645

BOOKS, INSTRUCTIONS, ETC.

"TELECOMMUNICATIONS (Principles) I and II in m.k.s. Units" covers everything for these C. and G. exams., numerous worked examples, price 10/6; also "Radio Reference" covers everything from basic principles to VHF, transmitters, aerial arrays, FM, etc., 180,000 words, 588 figs., price 25/-.—Riddiford, 384, Tilehurst Rd., Reading, Berks. [7232

"BASIC Mathematics for Radio and Electronics." By F. M. Colebrook, B.Sc., D.I.C.A.C.G.I. Revised and enlarged by J. M. Head, M.A. (Cantab.). Presents in readable form a complete course in basic mathematics for engineering students of all kinds and leads on to the more advanced branches of mathematics of increasing importance to radio engineers. In this edition the chapter covering the application of mathematics to radio has been revised and enlarged, while new subjects covered include Stability, Linear Differential Equations, Elementary Statistics, Short Cuts to Numerical Calculations and an Introduction to Matrices. Will be invaluable to those requiring a refresher course as well as to those without previous knowledge of the subject. 17/6 net from leading booksellers. By post 18/6 from Iliffe & Sons Ltd., Dorset House, Stamford St., S.E.1.

"FOUNDATIONS of Wireless." By M. G. Scroggie, B.Sc., M.I.E.E. A special feature of this edition is an entirely new chapter on the increasingly important subject of transistors and semi-conductors, while the rest of the text has been brought completely up to date to describe modern developments, including frequency modulation. The book covers the whole basic theory of radio from the most elementary principles in a simple straightforward style that can be readily followed by those without previous technical knowledge. The continuing heavy demand over the years demonstrates "Foundations" remarkable success; it is the perfect introduction to radio in all its branches. 12/6 net from leading booksellers. By post 13/8 from Iliffe & Sons Ltd., Dorset House, Stamford St., S.E.1.

"SECOND Thoughts on Radio Theory." By Cathode Ray of WIRELESS WORLD. Forty-four articles reprinted from popular WIRELESS WORLD series, in which the author examines various aspects of elementary radio science, explains them clearly, and shows that there may be more behind them than is apparent from the usual text-book. This volume deals with basic ideas; circuit elements and techniques; circuit calculations; and some matters in lighter mood. An entertaining and helpful text-book for the student, refresher course for the engineer, and reference book for all, combined; 25/- net from all booksellers. By post 26/4 from Iliffe & Sons Ltd., Dorset House, Stamford St., S.E.1.

"TELEVISION Explained." By W. E. Miller, M.A. (Cantab.), M.Brit.I.R.E. Revised by E. M. W. Spreadbury, M.Brit.I.R.E. The sixth edition of a book which assumes a knowledge of the ordinary sound radio receiver, but no previous knowledge of television circuits. It is non-mathematical, written in simple language and comprehensively illustrated by many diagrams and photographs. It will prove of great assistance to all students of television, to radio service engineers who wish to embark upon television work and want to understand the principles and circuits involved, and to knowledgeable owners of television receivers who would like to understand the working of their set. 12/6 net from all booksellers. By post 13/5 from Iliffe & Sons Ltd., Dorset House, Stamford St., London, S.E.1.

BOOKS WANTED

WANTED, copies of atomic, nuclear energy and electronic journals.—Box 3595. [7644

SOLDERING ?

HENLEY SOLON ELECTRIC SOLDERING IRONS

for 25 years the best

25 watt Instrument Model

A model for every purpose

Leaflets on request from:

W. T. HENLEY'S TELEGRAPH WORKS CO. LTD.
51-53 Hatton Garden, London, E.C.1
Tel: CHAncery 6822

BARGAIN OFFERS

200 WATT ROTARY CONVERTERS
New surplus 24 volts D.C. input, 50-110-230 volts A.C. 50 c/s, S.P., 200 watts output with transformer. **£8/15/-**. carr. paid.

METERS
6in. D.C. moving-coil ironclad voltmeters, S/bd type, 75 volts, 150 volts, 200 volts, 250 volts, **25/-** each. Flush panel D.C. moving-coil milli-ammeter, 2½in. 0-1 mA., **25/-**.

MOTORS
A.C., 230 volts, ¼ h.p., capacitor start, 1,380 r.p.m., new, **90/-**, carr. 5/-. **0.6 H.P.**, 230 volts, 940 r.p.m. 50 c/s., S.P., **£6/5/-**, carr. 7/6.

400-CYCLE MOTOR ALTERNATOR
Admiralty pattern, 230 volts A.C., 50 c/s., S.P. motor 15.5 amps input, 230 volts 2 kW A.C., 400 c/s., S.P. output with 50 volt D.C. exciter, with panel and control gear. Few only.

400-CYCLE INVERTERS
24/28 volts D.C. input, dual output 115 volts 750 v.a., 3-phase, 400 c/s and 24/26 volts 250 v.a. single-phase.

"S" METERS
2½in. square flush panel, suitable for AR88 or other receivers, new, **39/6**, post 1/6.

24in. PORTHOLE FANS
380/440 volts, 3-phase, 700 r.p.m., with blades, tested and guaranteed.

TEST TRANSFORMERS
230 volts 50 c/s input, 6,500 volts, 200 watts, air-cooled, in metal case, **£4/15/-**. carr. 5/-. **Auto Transformers**, 50-110-230 volts, 200 watt, **55/-**. **Met. Vick.** 500 watt auto 230/110 volts, **£5**, carr. 5/-. 230/110-150-180 volts, 1.6 k.v.A., **£8/10/-**. carr. 7/6. 230/115 volts, 10 k.v.A., in metal case, **£25**, carr. 25/-.

Leslie Dixon & Co.
Dept. A, 214 Queenstown Road, London, S.W.8
Telephone: MACaulay 2159

NEW S.T.C. AND "WESTALITE" SELENIUM RECTIFIERS. Largest L.T. range in Great Britain. Latest Current Products. NOT Surplus.

REVISED PRICES (3rd JUNE)

S.T. & C. E.H.T. K3/15, 5/-; K3/45, 9/4; K3/50, 9/10; K3/100, 16/8; all post 4d. extra.
BRIDGE CONNECTED FULLWAVE. 17v. 1a., 13/4; 1.5a. 26/6; 2.5a. 32/6; 3a. 30/6; 4a. 38/-; 5a. 38/6; all post 6d. 33v. 0.6a. 22/3; 1a. 22/9; 1.5a. 45/-; 2a. 54/-; 3a. 54/-; 4a. 64/-; 5a. 68/-; all post 1/6. 54v. 1a. 33/-; 1.5a. 62/-; 2a. 74/-; 3a. 74/-; 5a. 97/-. 72v. 1a. 42/-; 1.5a. 78/-; 2a. 95/-; 3a. 95/-; 5a. 124/-; 100v. 1a. 61/-; 1.5a. 112/-; 2a. 134/-; 3a. 134/-; 5a. 180/-, all post 2/-.
BRIDGE CONNECTED WITH 7½in. SQUARE COOLING FINS 17v. 6a. 53/7; 10a. 61/-; post 2/6.
BRIDGE CONNECTED HEAVY DUTY FUNNEL COOLED or 7½in. SQUARE COOLING FINS. Both types, same price. 17v. 12a. 95/-; 20a. 120/-; 30a. 172/-; 50a. 280/-; 33v. 6a. 89/-; 10a. 102/-; 12a. 176/-; 20a. 202/6; 54v. 6a. 124/-; 10a. 144/-; 72v. 6a. 160/-; 10a. 186/-; 100v. 6a. 227/6; 10a. 270/-, all post 3/-.

REVISED PRICES (7th FEB.)

"WESTALITE" (BRIDGE). 12-15v. D.C. 0.6a., 12/-; 1.2a., 30/-; 2a. 32/6; 2.5a. 49/-; 5a. 37/6; 10a. 64/6; 20a. 117/6; 30a. 171/-; 50a. 278/-; 24v. 1.2a. 30/-; 2.5a. 49/-; 5a. 60/-; 10a. 109/6; 20a. 208/-; 36v. 1.2a. 47/6; 2.5a. 84/-; 5a. 82/6; 10a. 154/6; 100v. 1.2a. 82/6; 2.5a. 154/6; 5a. 195/6; 10a. 391/-. All post *extra* from 1/6-3/6. E.H.T. Rects., 14D134, 25/-; 36EHT60, 35/10, post 4d. 1 m.a. A.C./D.C. meter-rects., **14/6**.
Wholesale and Retail
Special Price for Export and Quantity

T. W. PEARCE
66 Great Percy Street, London, W.C.1
Off Pentonville Road. Between King's Cross and Angel

The NEW

EDDYSTONE '870'
RECEIVER
PRICE — **£34.16.0** *(inc. P.Tax)*

Efficient broadcast reception on short, medium and long waves. A Semi-portable AC/DC set equally suitable for cabin or home use, offering Eddystone design and workmanship at a Reasonable Price.

In stock at:—
WEBB'S RADIO
14 SOHO STREET, LONDON, W.1
Telephone GERrard 2089

OSCILLOSCOPE
(MINIATURE TYPE—1" C.R.T.)



Supplied in kit form complete with full instructional notes for radio & T/V servicing. Operates from power supply of most AC domestic radio receiver equipment or from power unit supplied as an extra.

Cash £10 (inc. post/pkg.) or 30/- down and 9 monthly payments of £1
(Total Price £10.10.0.)
(Power unit, if required, £3 extra)

Order now or send for further details to:—
E.M.I. INSTITUTES, Dept. S.C.127, London, W.4

IC.82

TELETRON SUPER INDUCTOR COILS



Ferrite Rod Aerials. Wound on high permeability Ferroxcube rod, Medium wave 8/9, Dual wave 12/9.



Type HAX. Selective crystal diode coil for tape and quality amplifiers, MW 3/-, LW 3/6. Dual wave TRF Coils, matched pairs (as illustrated) 7/- pair. Type S.S.O. Supersonic Tape Osc. coil, provides 6.3 v. 3 a. RF for pre-amp heater. Eliminates induced 50 c/s hum, 40/100 kc, 15/- ea. Transistor coils, etc. Available from leading stockists. Stamp for complete data and circuits.

THE TELETRON CO. LTD.,
266, Nightingale Rd., London, N.9. How 2527

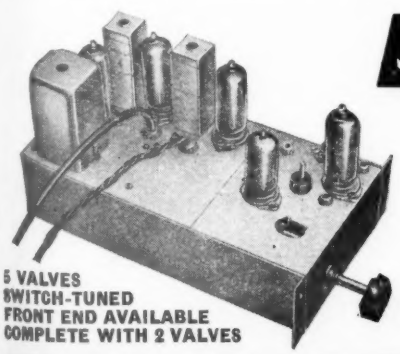

5 VALVES
SWITCH-TUNED
FRONT END AVAILABLE
COMPLETE WITH 2 VALVES

JASON SWITCHED F.M. TUNER

A BRITISH-DESIGNED UNIT FOR THE HOME CONSTRUCTOR

When built, this new Jason F.M. Tuner provides choice of the three B.B.C. programmes at the turn of a switch, with a fourth position for "OFF." The Switch Tuned Front End is supplied wired, tested and aligned, complete with 2 valves and station-indicating plate. Chassis ready punched in conformity with all Jason F.M. Units, this model is completely stable and offers the highest possible standards of reproduction.

CONSTRUCTOR'S SWITCH-TUNER *including assembled Front End with two valves and all parts as specified and approved come to* **£9.0.0**

SWITCH-TUNED FRONT END *with two valves, complete* **£6.5.0** *(Incl. £1/15/0 P/Tax)*

Data Publication Book of the Tuner *(Post Paid 2/3)* **2.0**

Send for detailed list of parts.—FREE

JASON POWER PACK *Parts come to* **£2.1.9**

FROM LEADING STOCKISTS *or in case of difficulty*
THE JASON MOTOR & ELECTRONIC CO.
328, CRICKLEWOOD LANE, LONDON, N.W.2
Phone: SPEedwell 7050

WRITE TO

A MAST PROBLEM? Skymasts

BEADON GARAGE BEADON ROAD LONDON W6 Telephone RIVerside 1124 and 7878

INDEX TO ADVERTISERS

	Page
Abix (Metal Industries), Ltd.	70
Acoustical Mfg. Co., Ltd.	39
Adcola Products, Ltd.	48
A.D.S. Relays, Ltd.	158
Aircraft Marine Products (Great Britain), Ltd.	63
Airmec, Ltd.	6
Alpha Radio Supply Co., The	148, 149
Amalgamated Wireless (Australasia), Ltd.	62
Amphenol, Ltd.	90
Amplex Appliances (Kent), Ltd.	138
Anders Electronics, Ltd.	60
Antex, Ltd.	76
Antiference, Ltd.	117
Appointments Vacant	165, 166, 167, 168, 169
Arcolectric Switches, Ltd.	48
Armstrong Wireless & Television Co., Ltd.	46, 173
Armstrong-Whitworth, Sir W. G. Aircraft, Ltd.	168
Aspden, W.	174
Automat, Ltd.	160
Avo, Ltd.	1
Beamish, V.	174
Belling & Lee, Ltd.	101
Benson, W. A.	174
Berry's (Short Wave), Ltd.	91
Birmingham Sound Reproducers, Ltd.	96
Bradmatic, Ltd.	152
Britain, Chas. (Radio), Ltd.	125
British Communications Corporation, Ltd.	31
British Institute of Engineering Technology	164, 178
British Insulated Callender's Cables, Ltd.	Cover ii
British National Radio School	138
British Physical Laboratories	35
Brookes Crystals, Ltd.	78
Brown, S. G., Ltd.	72
Bulgin, A. F., & Co., Ltd	Edit. 99
Bullers, Ltd.	78
Burne Jones & Co., Ltd.	91
Canadian Westinghouse Co., Ltd.	7
C. & G. Kits	156
Candler System Co.	166
Capitol Radio Engineering Institute	24
Cardross Engineering Co., Ltd.	165
Carr Fastener Co., Ltd.	21
Cathodeon Crystals, Ltd.	49
Cementation (Muffelite), Ltd.	53
Champion Products	162
Chapman, C. T. (Reproducers), Ltd.	81
Cinema Television, Ltd.	51, 67
City Sale & Exchange, Ltd.	54
Clarke, H., & Co. (Manchester), Ltd.	50
Classic Electrical Co., Ltd.	89
Clyne Radio, Ltd.	146, 147
Cosmocord, Ltd.	100
Cossor Radar	166
Cossor Instruments, Ltd.	106
Coventry Radio	176
Crane Packing, Ltd.	55
Daly (Condensers), Ltd.	50
Davies, A., & Co.	166
Davis, Jack (Relays), Ltd	74
Decca Radar, Ltd.	167
Delaney Gallay, Ltd.	19
Denco (Clacton), Ltd.	46
Dependable Radio Supplies	83
Dependable Relay Co.	130
Direct T.V. Replacements	124
Dixon, L., & Co.	181
Drivomatic, Ltd.	127
Duke & Co.	155
Dulci Co., Ltd., The	82, 114
Duode Natural Reproducers	174
Eddy's (N'tham), Ltd.	163
Egen Electric, Ltd.	124
E.I.R. Instruments, Ltd.	164
Electro-Acoustic Developments	165
Electro-Acoustic Industries, Ltd.	8
Electro-Methods, Ltd.	29
Electro-Winds, Ltd.	132
Electronic Precision Equipment	112, 113
Elec tric Tubes, Ltd.	65
English Electrical Co., Ltd.	168, 169
E.M.G. Handmade Gramophones, Ltd.	86
E.M.I. College	110
E.M.I. Electronics, Ltd.	103
E.M.I. Institutes	102, 107, 176, 181
E.M.I. Sales & Service, Ltd	79
English Electric Valve Co., Ltd.	5
Ever Ready Co. (G.B.), Ltd., The	9, 168
Feigate Radio, Ltd.	167
Ferranti, Ltd.	16
Filmer, J. T.	174
Finsbury Trading Co.	180
Formica, Ltd.	47
Foyle, W. & G., Ltd.	126
Fringevision, Ltd.	126
Frith Radiocraft, Ltd.	166
Garrard Eng. & Mfg. Co., Ltd., The	12
Gee Bros., Radio, Ltd.	161
General Electric Co., Ltd.	25, 37, 168
Gilfillan, R., & Co., Ltd.	178
Gilson, R. F., Ltd.	173
Gladstone Radio	138
Glaser, L. & Co.	166
Goldring Manufacturing (Gt. Britain), Ltd.	34
Goodmans Industries, Ltd.	66
Government H.Q.	169
Grampian Reproducers, Ltd.	128
Gray, Arthur, Ltd.	128
Grayshaw Instruments	132
Griffiths Hansen (Recordings), Ltd.	166
Hall Electric, Ltd.	45
Hanney, L. F.	172
Harding Electronics	166
Harmsworth, Townley & Co.	165
Harris Electronics (London), Ltd.	132, 133
Harris, P.	172
Hatter & Davis, Ltd.	154, 179
Henley's, W. T., Telegraph Works Co., Ltd.	181
Henry's (Radio), Ltd.	130, 131
Hivac, Ltd.	54
Home Radio, Ltd.	163
H P Radio Services, Ltd.	88
Hunt, A. H. (Capacitors), Ltd.	85
Hunton, Ltd.	152
Iliffe & Sons, Ltd.	58, 95
Independent Television Authority	168
Instruments Electrical Co.	164
International Correspondence Schools	154
Iota Services, Ltd.	129
Jackson Bros. (London), Ltd.	68
Jason Motor & Electronic Co.	181
Jeffery Transformer Co.	166
Jones, J. A.	166
Kenroy, Ltd.	174
Keyswitch Co., The	78
Koalectric, Ltd.	74
Lasky's Radio, Ltd.	139, 140, 141
Leak, H. J., & Co., Ltd.	111
Leevers-Rich Equipment, Ltd.	166
Lewis Radio Co.	122
Light Soldering Developments, Ltd.	164
Linear Products, Ltd.	121
Lionnet, J., & Co.	179
Lockwood & Co. (Woodworkers), Ltd.	162
London Central Radio Stores	176
Long Playing Record Library	129
L. R. Supply Co., Ltd.	114
Lyons Radio, Ltd.	177
Magnetic Devices, Ltd.	4
Mail Order Supply Co.	82
Marconi Instruments, Ltd.	61, 165, 169
Marconi's Wireless Telegraph Co., Ltd.	105
Martin, J. H.	179
Marriott, P. & Co., Ltd.	142
McMurdo Instruments Co., Ltd.	22, 120, 126
Measuring Instruments (Pullin), Ltd.	90
Metropolitan-Vickers Electrical Co., Ltd.	169
Mercia Enterprises, Ltd.	82
Mersey Cable Works	52
Microwave Instruments	164
Midland Instrument Co.	158
Mills, W.	138
Ministry of Transport	169
Modern Book Co.	176
Modern Electrics, Ltd.	84
Modern Techniques	84
M.O. Valve Co., Ltd.	168
M.R. Supplies, Ltd.	74
M.S.S. Recording Co., Ltd.	80
Mullard, Ltd.	3, 33, 44, 75, 81, 98
Multicore Solders, Ltd.	Cover iv
Multitone Electric Co., Ltd.	10, 160
Murex, Ltd.	60
Nagard, Ltd.	56
N.A.R. Agencies, Ltd.	166
Newmarket Transistors, Ltd.	43
Newnes, George, Ltd.	32a, 32b
Northern Radio Services	68
Oakfield Radio	166
Oddie, Bradbury & Cull, Ltd.	162
Osmor Radio Products, Ltd.	130
Oxley Developments Co.	162
Painton & Co., Ltd.	30
Palmer G. A. Stanley, Ltd.	52
Parker, A. B.	128
Partridge Transformers, Ltd.	171
P.C. Radio	116
P.C.A. Radio	116
P.C.D., Ltd.	66
Pearce, T. W.	181
Phillips & Bonson, Ltd.	13
Philips Electrical, Ltd.	118
Planet Instrument Co.	164
Plasticable, Ltd.	128
Plessey Co., Ltd.	18, 36, 57, 77
Post Radio Supplies	164, 166
Power Controls, Ltd.	27
Premier Radio Co.	92, 93, 94
Preston, A., & Sons	120
Proops Bros., Ltd.	150, 151
Pullin, R. B., Ltd.	169
Pye, Ltd.	11
Quality Mart	156
Quartz Crystal Co., Ltd.	178
Radio & T.V. Components (Acton), Ltd.	160
Radio Component Specialists	159
Radio Corporation of America	
Radio Exchange Co., The	163
Radio Resistor, Ltd.	14
Radio Servicing Co.	62
Radio Supply Co. (Leeds), Ltd.	136, 137
Radio Traders, Ltd.	142
Radiospares, Ltd.	86
RCA, Great Britain, Ltd.	28
Record Housing	142
Relda Radio, Ltd.	157
Reliance Manufacturing Co., Ltd.	76
Reproducers & Amplifiers, Ltd.	69
R.G.D., Ltd.	168
Rogers Development (Electronics), Ltd.	56
Rollett, H., & Co., Ltd.	178
Salford Electrical Instruments, Ltd.	41
Samsons Surplus Stores	158
Sanders, W. H.	168
Sangamo-Weston, Ltd.	110
Savage Transformers, Ltd.	175
Service Trading Co.	88
Shape, H.Q.	167
Sherbourne Television Service	138
Sherwood Instruments	176
Siemens & Halske Aktiengesellschaft	26
Siemens Edison-Swan, Ltd.	73, 104, 108
Simmonds, L. E., Ltd.	83
Skymasts	182
Smith, G. W. (Radio), Ltd.	134, 135
Smith, H., & Co., Ltd.	175
Smith, W. H. & Sons, Ltd.	86
Solartron Electronic Group, Ltd.	2
Sonomag, Ltd.	124
Southern Radio Supply, Ltd.	172
Southern Technical Supplies	166
Sowter, E. A.	166
Specialised Electrical Components	163
Specialist Switches	127
Specto, Ltd.	70
Spencer-West, Ltd.	178
Stamford, A. L.	177
Standard Telephones & Cables, Ltd.	71, 99
Steel Company of Wales	169
Stern Radio, Ltd.	143, 144, 145
Stewart Transformers, Ltd.	76
Sugden, A. R., & Co. (Engineers), Ltd.	64
Sutton Coldfield Electrical Engineers	127
Tannoy Products, Ltd.	166
Technical Ceramics, Ltd.	87
Technical Trading Co.	154
Telefusion Eng., Ltd.	160
Telegraph Condenser Co., Ltd.	Cover iii
Telequipment, Ltd.	40
Tele-Radio (1943), Ltd.	84, 162
Teletron Co., The	181
Test Equipment Repair	142
Texas Instruments, Ltd.	123
Thorn Electrical Industries, Ltd.	15
Trianon-Electric, Ltd.	84, 88
Trix Electrical Co., Ltd.	Edit. 97
T.R.S. Radio	152
Truvox, Ltd.	23
Universal Book Co.	164
Universal Electronics	122
Valradio, Ltd.	80
Venner Electronics, Ltd.	32
Verdik Sales, Ltd.	162
V.E.S. Wholesale Services, Ltd.	126
Vitavox, Ltd.	17
Vortexion, Ltd.	109
V.Z. Electrical Service	162
Walmore Electronics, Ltd.	90
Watts Cecil E.	176
Watts Radio	132
Wayne Kerr Laboratories, Ltd., The	119
Webber, R. A., Ltd.	130
Webb's Radio	118, 181
Westinghouse Brake & Signal Co., Ltd.	20
Weymouth Radio Mfg. Co., Ltd., The	58
Wharfedale Wireless Works	114
White, S. S., Co. of Gt. Britain, Ltd. The	42
Wilkinson, L. (Croydon), Ltd.	156
Wilson, Ronald & Co., Ltd.	164
Woden Transformer Co., Ltd.	59
Wolsey Electronics, Ltd.	72
Young, C. H.	163
Z. & I. Aero Services, Ltd.	153, 170

Printed in Great Britain for the Publishers, ILIFFE & SONS LTD., Dorset House, Stamford St., London, S.E.1, by CORNWALL PRESS LTD., Paris Garden, London, S.E.1. *Wireless World* can be obtained abroad from the following: AUSTRALIA and NEW ZEALAND: Gordon & Gotch, Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson Subscription Service, Ltd.; Gordon & Gotch, Ltd. SOUTH AFRICA: Central News Agency, Ltd., William Dawson & Sons (S.A.), Ltd. UNITED STATES: Eastern News Co., 316 West 11th Street, New York 14.

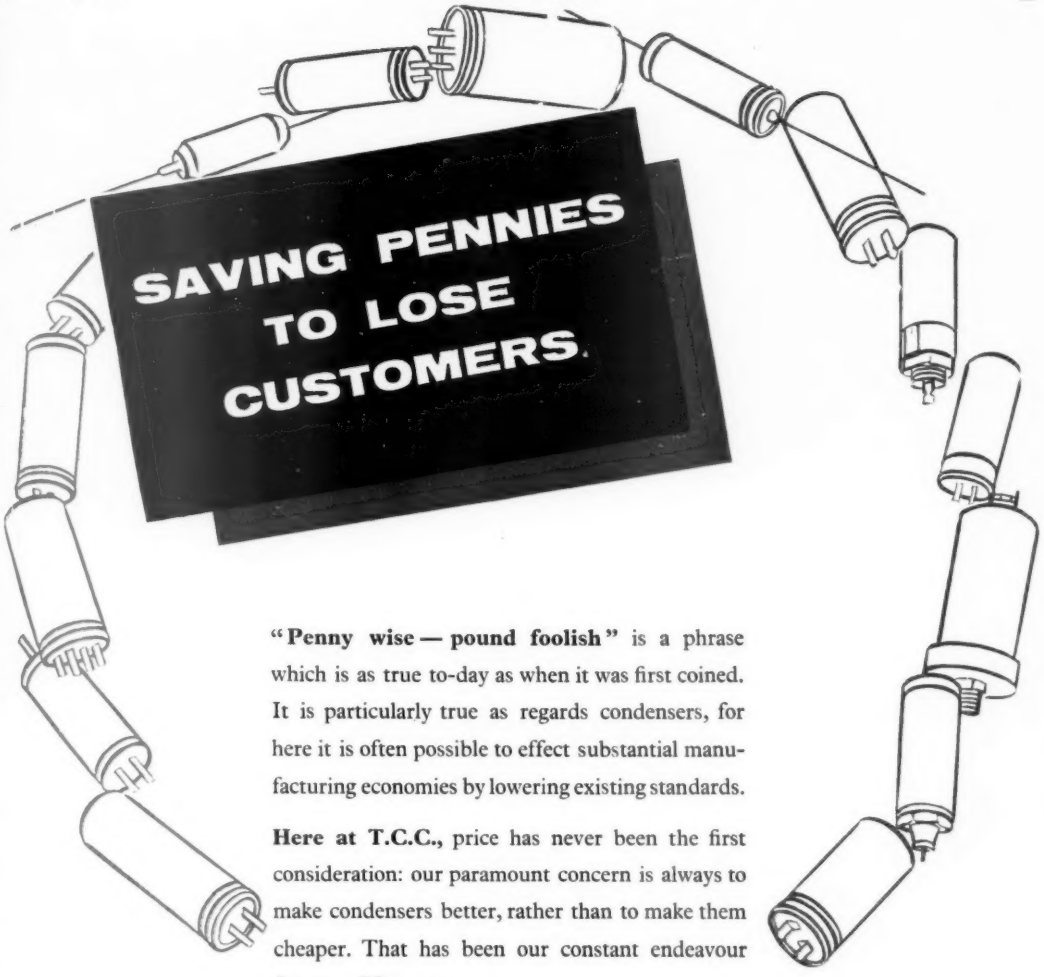

"Penny wise — pound foolish" is a phrase which is as true to-day as when it was first coined. It is particularly true as regards condensers, for here it is often possible to effect substantial manufacturing economies by lowering existing standards.

Here at T.C.C., price has never been the first consideration: our paramount concern is always to make condensers better, rather than to make them cheaper. That has been our constant endeavour for over fifty years.

In that time, the letters T.C.C. on a condenser have come to be recognised as the symbol of leadership and the hall-mark of quality. Such a reputation must be jealously guarded by the constant maintenance of standards. We are proud that the majority of makers of TV and radio sets depend on T.C.C. condensers to protect their own reputations.

TCC

THE TELEGRAPH CONDENSER CO. LTD
INDUSTRIAL DIVISION · NORTH ACTON LONDON · W3 · Phone: ACORN 0061

British made SAVBIT now helps U.S.A. manufacturers

Now ready!

SAVBIT®

A SPECIAL ALLOY AVAILABLE ONLY IN ERSIN Multicore

FIVE-CORE SOLDER

Simplified Explanation:

	Before Soldering	During Soldering	After Soldering
In soldering with straight tin/lead alloys...	Tin/Lead Solder — Copper Tip. Solder contacted by copper tip...	Molten Tin/Lead/Copper — Copper Tip. absorbs tip metal to saturation...	Tin/Lead/Copper Joint — Copper Tip. and wears out tip rapidly!
Whereas... In soldering with new SAVBIT ALLOY...	Tin/Lead/Copper Solder — Copper Tip. Copper-saturated SAVBIT solder...	Molten Tin/Lead/Copper — Copper Tip. cannot borrow copper from the iron...	Tin/Lead/Copper Joint — Copper Tip. which receives hardly any wear.

THIS EXPLAINS HOW SAVBIT ALLOY STOPS THE WEARING OUT OF COPPER TIPS

Two years ago, Multicore introduced a special alloy for soldering silver-plated ceramics, containing a 2% silver content, so that it would not absorb silver from the ceramic. The same patented principle has now been applied to prevent the copper of soldering iron tips being absorbed into solder alloys! Until now, incorporation of copper in a solder alloy to more than 0.3% of the tin content was discouraged, since it was believed that copper might slow the flow of solder in making seams. An extensive investigation under actual working conditions on television assembly lines has now proven that a copper-loaded alloy does *not* effect the speed of soldering, when making the joints which form 98% of the soldering processes in the assembly and manufacture of all electronic equipment.

WEAR OF COPPER TIPS

Most engineers have presumed that the wear of copper soldering iron tips used on assembly lines was caused by (1) oxidation of the copper due to heat, (2) attack of the flux on the copper bit, and (3) absorption of the copper from the tip into the tin of the solder alloy. However, these investigations have proven conclusively that reasons (1) and (2) are not the explanation.

On the other hand, comparative tests between Ersin Multicore Solder with the new SAVBIT copper-loaded alloy, and solders containing pure tin/lead alloys have indicated that a reduction of about 9/10 in tip wear can be achieved by the use of SAVBIT ALLOY! It is a fact that the tip of an iron which needs resurfacing after 1,000 joints with normal tin/lead alloys can last for 10,000 or more similar joints before requiring resurfacing, using Ersin Multicore SAVBIT ALLOY. (See illustration.) Therefore, it is hardly necessary to emphasize the great economies that can be effected in soldering iron maintenance by using this new alloy. Equally important, a higher standard of soldering is guaranteed throughout the life of the iron, because it stays in first class condition much longer!

CHARACTERISTICS AND SPECIFICATIONS

SAVBIT ALLOY is now available in Ersin Multicore 5-core solder, containing non-corrosive extra-fast Ersin Flux, in 14, 16 and 18 gauge.

MELTING POINT: Virtually the same as standard tin/lead alloys.

ELECTRICAL CONDUCTIVITY, TENSILE AND SHEAR STRENGTH: No appreciable difference between SAVBIT and normal tin/lead alloys. Strength of SAVBIT slightly greater.

IMPORTANT

SAVBIT is one of a number of alloys developed for the Industry by Multicore. In addition to SAVBIT, Ersin Multicore, the world's finest cored solder, is also available in all the standard tin/lead alloys and diameters, in 1 lb. cartons and 7 lb. reels. Multicore contains 5 cores of exclusive, high speed, non-corrosive Ersin Flux. This great solder, so widely-imitated, has never been equalled for speed of operation, effective prevention of rejects and, in the long run, lowest cost for superior results.

SAVBIT ALLOY has been impressively proven on the assembly lines of England's greatest manufacturers. We will be pleased to furnish testimonials.

Address U.S.A. inquiries on company letterhead to Dept MS167

MULTICORE SALES CORPORATION
PORT WASHINGTON, N. Y.

Canadian Inquiries: CHARLES W. POINTON LTD. 6 Alcina Ave., Toronto, Canada

Inquiries regarding other territories: MULTICORE SOLDERS LTD. Hemel Hempstead Herts., England

SAVBIT FOR FACTORIES

Available on 7 lb. and 1 lb. reels in 14, 16 and 18 s.w.g. Bulk prices on application. Please write for Technical Information.

SAVBIT FOR SERVICE ENGINEERS

Approx. 170ft. of 18 s.w.g. on a reel. Packed in a carton.

15/- each (subject)

Cat. Ref. R18SAV.

SAVBIT CARTONS

5/- each (subject)

Cat. Ref.	S.W.G.	App. L'gth.
CI SAV 14	14	20 ft.
CI SAV 16	16	30 ft.
CI SAV 18	18	53 ft

Bib WIRE STRIPPER AND CUTTER

3/6 each (subject).

Bib RECORDING TAPE SPLICER

For the professional and amateur recording enthusiasts.

18/6 each (subject).

MULTICORE SOLDERS LTD., MULTICORE WORKS, HEMEL HEMPSTEAD, HERTS. (BOXMOOR 3636)

1958

ct).

3636)

XUM